PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: WO 99/16207 (11) International Publication Number: H04L 9/00 A1 (43) International Publication Date: 1 April 1999 (01.04.99) (81) Designated States: AU, BR, CA, JP, MX, SG, European patent PCT/US98/20148 (21) International Application Number: (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, 25 September 1998 (25.09.98) LU, MC, NL, PT, SE). (22) International Filing Date: **Published** (30) Priority Data: 60/060,655 26 September 1997 (26.09.97) US With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of (71)(72) Applicants and Inventors: BRANDT, amendments [CH/US]; 11575 Windmill Road, Colorado Springs, CO 80908 (US). PILLAI, Sajan, J. [IN/US]; 8830 Nantucket Court, Colorado Springs, CO 80920 (US). (74) Agents: GROLZ, Edward, W. et al.; Scully, Scott, Murphy & Presser, 400 Garden City Plaza, Garden City, NY 11530 (US).

(54) Title: INTEGRATED PROXY INTERFACE FOR WEB BASED DATA MANAGEMENT REPORTS

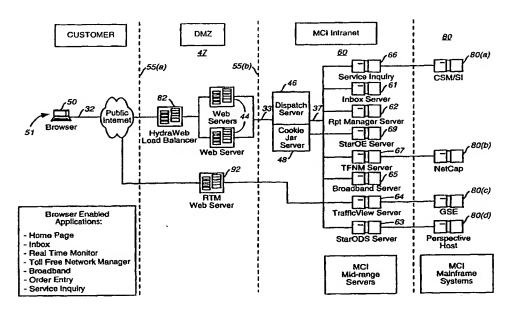

(57) Abstract

An Intranet/Internet/Web-based data management tool that provides a common GUI enabling the requesting, customizing, scheduling and viewing of various types of priced call detail data reports pertaining to a customer's usage of telecommunications services. The Web-based reporting system tool comprises a novel Web-based, client-server application integrated with an operational data management/storage infrastructure that enables customers to access their own relevant data information timely, rapidly and accurately through the GUI client interface. The data management system infrastructure is designed to enable the secure initiation, acquisition, and presentation of telecommunications priced call detail data reports to customer workstations (51) implementing a web browser (50).

٤.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

DK Denmark LK Sri Lanka SE Sweden

INTEGRATED PROXY INTERFACE FOR WEB BASED DATA MANAGEMENT REPORTS

The present invention relates generally to information delivery systems and, particularly, to a novel, World Wide Web/Internet-based, telecommunications network data management reporting and presentation service for customers of telecommunications service entities.

Telecommunications service entities, e.g., MCI, AT&T, Sprint, and the like, presently provide for the presentation and dissemination of customer account and network data management information to their customers predominantly by enabling customers (clients) to directly dial-up, e.g., via a modem, to the entity's application servers to access their account information, or, alternately, via dedicated communication lines, e.g., ISDN, T-1, etc., enabling account information requests to be initiated through their computer terminal running, for example, a Windows based graphical user interface. The requests are processed by the entity's application servers, which retrieves the requested customer information, e.g., from one or more databases, processes and formats the information for downloading to the client's computer terminal.

Some types of data, e.g., "priced" call detail data pertaining to a customer's telecommunications number usage, is made available for customers in an aggregated or processed form and provided to customers, e.g., on a monthly basis. This type of data is analyzed to determine, for example,

5

10

15

20

25

30

PCT/US98/20148 WO 99/16207

asset usage and trend information necessary, which is required for network managers to make critical business decisions. As an example, the assignee telecommunications carrier MCI Corporation provides an MCI ServiceView ("MSV") product line for its business customers which includes several client-server based data management applications. One of these applications, referred to as "Perspective", provides call usage and analysis information that focuses on the presentation of and priced call detail data and reports from an MCI Perspective Data Server ("StarPR"). Another client-server based data management application, referred to as "Traffic View", focuses on the presentation of real time call detail data and network traffic analysis/monitor information as provided from an MCI Traffic view server. Particularly, with respect to MCI's Perspective system, customers are provided with their monthly priced and discounted raw call detail data, call detail aggregates, and statistical historical summary data. 20 As such, the Perspective architecture is organized primarily as a batch midrange-based server data delivery mechanism with the data being typically delivered on a monthly basis, allowing for "delayed" trending, call pattern analysis, repricing and invoice 25 validation based on the customer's call detail data. The trending, analysis, and repricing functionality is maintained in workstation-based software provided to customers for installation at customer sites on their PCS. 30

5

10

Figure 1 illustrates the current architecture 10 for Perspective and Traffic View Systems which presently run on separate environments and are maintained independently of each other. The StarPR server provides a batch reporting mechanism focused primarily on providing billing data to 1-800/8xx, VNET, Vision, and other MCI customers and is used by MCI customers predominantly to do internal charge backs and to analyze billing usage. Alternately, or in addition, the customers use the data provided to them to do call traffic analysis, similar to TVS.

With specific reference to Figure 1, the data collected is in the form of call detail records which are created by various MCI/Concert switches (not shown) whenever a telephone call is attempted in the MCI network and which includes information about call type, call origination and termination locations, date and time, added intelligent network services, any hop information, product type and other relevant information about the call. The Network Information Concentrator ("NIC") component 15 is a network element that collects the CDRs and sends them to appropriate locations via a Global Statistical Engine 17. Global Statistical Engine 17 collects the CDRs and transforms, processes, and sends them to the TVS 20. The TVS provides access to this data through various statistical reports and real time monitoring engine 22 ("RTM"):

The CDRs from are also sent to the billing system which applied billing based on call detail values. These "priced" CDRs are known as Billing

5

10

15

20

25

Detail Records ("BDRs") and are sent to a Perspective Host ("Phost") server 25. The Phost server 25 filters out the BDRs not pertaining to the "Perspective" customers, applies various transformations to the customer's raw call detail data to generate summary data, and generates and formats the data for the various Perspective customers. This data is then compressed, sent to a document service center ("DSC") and CD-ROM dispatcher ("CDD") 34 entities which respectively, uncompresses the data and burns CD-ROMs comprising the customer's raw call detail data and summary data, in addition to reference files and possibly application software (if not previously owned) enabling customers to perform analysis and trending of their Perspective data. These CD-ROMs are sent to the customers, usually on a billing cycle or monthly basis, who view their data through a Perspective workstationbased software application residing on that customer's CPE, e.g., PC or workstation 36.

As shown in Figure 1, the existing
Perspective Host 25 mainframe based data delivery
system interfaces with all Perspective upstream feed
systems, including billing systems and order entry, and
processes the data, e.g., creates canned aggregates,
for delivery to the document service center.

The following upstream feed systems include:

1) order entry information from a customer order entry
system 19 ("CORE") and which information is used by the
Perspective Host to determine what customer data to
process and where to send it; 2) VNET and Vision
monthly billing data feeds from a commercial billing

-4-

5

10

15

20

25

system ("NBCS") system 23; 3) a Toll-free monthly billing data feed from a T/F database feed 27; and, a Concert Virtual Network Services ("CVNS") product feed from a CVNS database 31. In order for all the CDR and data feed information to be processed by the Phost server 25, various reference files and processing rules are provided including: alphanumeric translation reference files from the NCBS billing system 23 and an NPA/NXX-state-city and country code lookup reference file originating from a calling area data base ("CADB") 35.

While effective for its purpose, the current data management and presentation architecture only provides customers with their priced call detail data on a monthly basis, usually in the form of a canned report. This is not sufficient for an increasing number of customers who, to remain competitive, are required to have updated and real-time access to their data to enable them to make their critical business decisions quicker. Moreover, there are a variety of independent data management tools and legacy reporting systems having disparate systems and infrastructures providing little or no cross application interoperability and data sharing, thus, requiring customers to use separate applications to gain access to their data.

Furthermore, existing telecommunications service provider reporting systems are limited in that reports generated are of a narrow view, and are delivered at predetermined times with predetermined formats. These prior art reporting systems do not enable the generation of ad-hoc reports. Moreover,

5

10

15

20

25

PCT/US98/20148 WO 99/16207 .:

legacy platforms including reporting data are reaching the architectural limits of scalability in terms of the total customers they can support, total online data they can present, total historical data they can keep and type and number of applications they can support.

It would thus be highly desirable to provide a data management product that is a Web-based (Internet and IIntranet) client-server application providing priced call detail data information to customers in a variety of detailed report formats comprising specific customer account information.

It would additionally be highly desirable to provide a Web-based (Internet and IIntranet) data management tool having a unique back-end infrastructure for a Web-based client-server application which provides expedient and secure data access and reporting services to customers at any time, from any web browser on any computer terminal anywhere in the world.

novel IIntranet/Internet/Web-based data management tool that provides a common GUI enabling the requesting, customizing, scheduling and viewing of various types of priced call detail data reports pertaining to a customer's usage of telecommunications services. The Intranet/Internet/Web-based reporting system tool comprises a novel Web-based, client-server application integrated with an operational data management/storage infrastructure that enables customers to access their own relevant data information timely, rapidly and accurately through

5

10

15

20

25

the GUI client interface. The operational database system infrastructure particularly is configured to meet a customer's real-time data processing and storage requirements and is easy to deploy and manage, and further, ensures upward and downward scalability. It enables effective storage of data from a variety of independently developed legacy systems and, is readily integrated into a novel Web-based (Internet and Intranet) reporting system tool that enables customers to customize and directly access their own relevant data report information. The world wide web/Internet-based client-server data management and reporting tool employs a platform-independent, i.e., JAVA-based, network centric GUI client presentation layer and an objects/dispatcher/proxy layer access architecture.

particularly, the telecommunications data management/system architecture is integrated with a novel Web/Internet based reporting system, referred to as networkMCI Interact ("nMCI"). The back-end data management/system architecture, referred to herein as "StarODS", implements a Data Warehouse approach to maintaining data obtained from upstream billing systems, i.e., priced call detail data, and which data may be made readily available for reporting on a daily basis. In this approach, priced call detail data is maintained in datamarts and operational data stores capable of meeting real-time processing and storage requirements.

Particularly, these datamarts may be partitioned

5

10

15

20

25

.:

based on various criteria, e.g., customer id, to enable easier management of data by providing scalability, and enabling more control of over hardware and software resources, in a costeffective way. Included in this datamart approach is a back-end server component provided to receive data access requests from various users in the form of a report request, interactive data analysis request or data mining request. This server routes the query to the appropriate data marts, data warehouse or operational data store and responds to the requestor with the result set.

functioning to enable customers to request reporting functionality across the Internet. This report request functionality includes routing requests to appropriate datamarts, e.g., real-time reporting requests will be satisfied by real-time database. Additionally, the interface provides customers with the ability to schedule and prioritize reports, format report request result sets, and provides for load balancing, report request validation, query generation and execution. Through a common GUI, customers are enabled to access their own metered data, i.e., Perspective or usage analysis data.

In accordance with the principles of the present invention, there is provided a Web/Internet based reporting system for communicating data information from an enterprise

5

10

15

20

25

intranet database to a client terminal via an integrated interface comprising: a client browser application located at the client terminal for enabling interactive Web based communications with the reporting system, the 5 client terminal identified with a customer and providing the integrated interface; at least one secure server for managing client sessions over the Internet, the secure server supporting a first secure socket connection enabling encrypted 10 communication between the browser application client and the secure server; a dispatch server for communicating with the secure server through a firewall over a second socket connection, the first secure and second sockets forming a secure 15 communications link, the dispatch server enabling forwarding of a report request message and an associated report response message back to the client browser over the secure communications link; a report manager server for maintaining an 20 inventory of reporting items associated with a customer and managing the reporting of customerspecific data information in accordance with a customer request message, the report manager accessing reporting items based on a customer 25 identity and report name from a first database, and generating a response message including a metadata description of the reporting items; and, decision support server interfacing with the report manager for accessing the customer-specific data from the 30 enterprise intranet database in accordance with the

customer identity and report name, wherein the retrieved data and the metadata description of the reporting item are utilized to generate a completed report for presentation to the customer via the interface.

Advantageously, the novel Web/Internet based reporting system integrated with the data management system permits use of existing hardware while allowing future growth to utilize new equipment at less cost and further, allows for incremental expansion as applications and database capacities grow.

Further features and advantages of the invention will become more readily apparent from a consideration of the following detailed description set forth with reference to the accompanying drawings, which specify and show preferred embodiments of the invention, wherein like elements are designated by identical references throughout the drawings; and in which:

Figure 1 illustrates conceptually an existing mainframe-based data delivery system 10 providing customer's call detail data;

Figure 2 illustrates the software architecture component comprising a three-tiered structure;

Figure 3 is a diagrammatic overview of the software architecture of the networkMCI Interact system;

Figure 4 is an illustrative example of a backplane architecture schematic;

5

10

15

20

25

Figure 5 illustrates an example client GUI presented to the client/customer as a browser web page; Figure 6 is a diagram depicting the physical networkMCI Interact system architecture; 5 Figure 7 is a block diagram depicting the physical architecture of the StarWRS component of networkMCI Interact Reporting system; Figure 8 illustrates the primary components implemented in the StarODS priced 10 reporting component 400; Figure 9 illustrates the data model implemented for accessing information used in priced reporting system of nMCI Interact; Figure 10(a) illustrates the logical 15 Report Manager/DSS application programming interface; Figure 10(b) illustrates the logical DSS/Report Manager application programming 20 interface; Figures 11(a)-11(b) illustrate an overview of the process performed by the DSS in routing a request; Figure 12(a) illustrates an overview of the DSS connections enabling guaranteed message 25 delivery in the nMCI Interact System; Figure 12(b) illustrates the formatter process implemented in the DSS server; Figures 13(a)-13(c) illustrate the end-

to-end process 600 for fulfilling priced report

30

request;

PCT/US98/20148 WO 99/16207

Figure 14 illustrates a logical message format sent from the client browser to the desired middle tier server for a particular application; and

Figures 15(a) and 15(b) are schematic illustrations showing the message format passed between the Dispatcher server and the application specific proxy (Figure 15(a)) and the message format passed between the application specific proxy back to the Dispatcher server (Figure 15(b)).

The present invention is one component of an integrated suite of customer network management and report applications using a Web browser paradigm. Known as the networkMCI Interact system ("nMCI Interact") such an integrated suite of Webbased applications provides an invaluable tool for enabling customers to manage their telecommunication assets, quickly and securely, from anywhere in the world.

The nMCI Interact system architecture is basically organized as a set of common components comprising the following:

- an object-oriented software architecture detailing the client and server based aspect of nMCI Interact;
- 2) a network architecture defining the physical network needed to satisfy the security and data volume requirements of the networkMCI System;
- 3) a data architecture detailing the application, back-end or legacy data sources available for networkMCI Interact; and

5

10

15

20

25

4) an infrastructure covering security, order entry, fulfillment, billing, self-monitoring, metrics and support.

Each of these common component areas will be generally discussed hereinbelow.

Figure 2 is a diagrammatic illustration of the software architecture component in which the present invention functions. A first or client tier 40 of software services are resident on a customer work station and provides customer access to the enterprise system, having one or more downloadable application objects directed to front end business logic, one or more backplane service objects for managing sessions, one or more presentation services objects for the presentation of customer options and customer requested data in a browser recognizable format and a customer supplied browser for presentation of customer options and data to the customer and for internet communications over the public Internet. Additionally applications are directed to front end services such as the presentation of data in the form of tables and charts, and data processing functions such as sorting and summarizing in a manner such that multiple programs are combined in a unified application suite. A second or middle tier 42, is provided having secure web servers and back end services to provide applications that establish user sessions, govern user authentication and their entitlements, and communicate with adaptor programs to simplify the interchange of data across the network.

A third or back end tier 45 having applications directed to legacy back end services

5

10

15

20

25

including database storage and retrieval systems and one or more database servers for accessing system resources from one or more legacy hosts.

Generally, the customer workstation includes client software capable of providing a platform-independent, browser-based, consistent user interface implementing objects programmed to provide a reusable and common GUI abstraction and problem-domain abstractions. More specifically, the client tier software is created and distributed as a set of Java classes including the applet classes to provide an industrial strength, objectoriented environment over the Internet. Application-specific classes are designed to support the functionality and server interfaces for each application with the functionality delivered through the system being of two-types: 1) crossproduct, for example, inbox and reporting functions, and 2) product specific, for example, toll free network management or Call Manager functions. The system is capable of delivering to customers the functionality appropriate to their product mix.

Figure 3 is a diagrammatic overview of the software architecture of the networkMCI Interact system including: the Customer Browser (a.k.a. the Client) 50; the Demilitarized Zone (DMZ) 47 comprising a Web Servers cluster 44; the MCI Intranet Dispatcher Server 46; and the MCI Intranet Application servers 60, and the data warehouses, legacy systems, etc. 80.

A customer workstation 51 employs a Web Browser 50 implementing client applications responsible for presentation and front-end

5

10

15

20

25

Its functions include providing a user services. interface to various MCI services and supporting communications with MCI's Intranet web server cluster 44. As illustrated in Figure 3, the client tier software is responsible for presentation services to the customer and generally includes a web browser 50 and additional object-oriented programs residing in the client workstation platform 51. The client software is generally organized into a component architecture with each component generally comprising a specific application, providing an area of functionality. The applications generally are integrated using a "backplane" services layer 52 which provides a set of services to the application objects which provide the front end business logic and manages The networkMCI Interact common set their launch. of objects provide a set of services to each of the applications such as: 1) session management; 2) application launch; 3) inter-application communications; 4) window navigation among applications; 5) log management; and 6) version management.

The primary common object services include: graphical user interface (GUI); communications; printing; user identity, authentication, and entitlements; data import and export; logging and statistics; error handling; and messaging services.

backplane architecture scheme illustrating the relationship among the common objects. In this example, the backplane services layer 52 is programmed as a Java applet which can be loaded and

5

10

15

20

25

;

launched by the web browser 50. With reference to Figure 4, a typical user session starts with a web browser 50 creating a backplane 52, after a successful logon. The backplane 52, inter alia, presents a user with an interface for networkMCI Interact application management. A typical user display provided by the backplane 52 may show a number of applications the user is entitled to run, each application represented by buttons depicted in Figure 4 as buttons 58a,b,c selectable by the user. As illustrated in Figure 4, upon selection of an application, the backplane 52 launches that specific application, for example, Service Inquiry 54a or Alarm Monitor 54b, by creating the application object. In processing its functions, each application in turn, may utilize common object services provided by the backplane 52. Figure 4 shows graphical user interface objects 56a,b created and used by a respective application 54a,b for its own presentation purposes.

Figure 5 illustrates an example client GUI presented to the client/customer as a browser web page 71 providing, for example, a suite 70 of network management reporting applications including: MCI Traffic Monitor 72; an alarm monitor 73; a Network Manager 74 and Intelligent Routing 75. Access to network functionality is also provided through Report Requester 76, which provides a variety of detailed reports for the client/customer and a Message Center 77 for providing enhancements and functionality to traditional e-mail communications.

As shown in Figures 3 and 4, the browser resident GUI of the present invention implements a

5

10

15

20

25

single object, COBackPlane which keeps track of all the client applications, and which has capabilities to start, stop, and provide references to any one of the client applications.

The backplane 52 and the client applications use a browser 50 such as the Microsoft Explorer versions 4.0.1 or higher for an access and distribution mechanism. Although the backplane is initiated with a browser 14, the client applications are generally isolated from the browser in that they typically present their user interfaces in a separate frame, rather than sitting inside a Web page.

The backplane architecture is implemented with several primary classes. These classes include COBackPlane, COApp, COAppImpl, COParm. and COAppFrame classes. COBackPlane 52 is an application backplane which launches the applications 54a, 54b, typically implemented as COApp. COBackPlane 52 is generally implemented as a Java applet and is launched by the Web browser 50. This backplane applet is responsible for launching and closing the COApps.

when the backplane is implemented as an applet, it overrides standard Applet methods init(), start(), stop() and run(). In the init() method, the backplane applet obtains a COUser user context object. The COUser object holds information such as user profile, applications and their entitlements. The user's configuration and application entitlements provided in the COUser context are used to construct the application toolbar and Inbox applications. When an application toolbar icon is clicked, a particular

5

10

15

20

25

COApp is launched by launchApp() method. The launched application then may use the backplane for inter-application communications, including retrieving Inbox data.

The COBackPlane 52 includes methods for providing a reference to a particular COApp, for interoperation. For example, the COBackPlane class provides a getApp() method which returns references to application objects by name. Once retrieved in this manner, the application object's public interface may be used directly.

As shown in Figure 3, the aforesaid objects will communicate the data by establishing a secure TCP messaging session with one of the DMZ networkMCI Interact Web servers 44 via an Internet secure communications path 32 established, preferably, with a secure sockets SSL version of The DMZ networkMCI Interact Web servers 44 function to decrypt the client message, preferably via the SSL implementation, and unwrap the session key and verify the users session. establishing that the request has come from a valid user and mapping the request to its associated session, the DMZ Web servers 44 will re-encrypt the request using symmetric encryption and forward it over a second socket connection 33 to the dispatch server 46 inside the enterprise Intranet.

A networkMCI Interact session is designated by a logon, successful authentication, followed by use of server resources, and logoff. However, the world-wide web communications protocol uses HTTP, a stateless protocol, each HTTP request and reply is a separate TCP/IP connection, completely independent of all previous or future

5

10

15

20

25

connections between the same server and client. The nMCI Interact system is implemented with a secure version of HTTP such as S-HTTP or HTTPS, and preferably utilizes the SSL implementation of The preferred embodiment uses SSL which provides a cipher spec message which provides server authentication during a session. preferred embodiment further associates a given HTTPS request with a logical session which is initiated and tracked by a "cookie jar server" 48 to generate a "cookie" which is a unique servergenerated key that is sent to the client along with each reply to a HTTPS request. The client holds the cookie and returns it to the server as part of each subsequent HTTPS request. As desired, either the Web servers 44, the cookie jar server 48 or the Dispatch Server 46, may maintain the "cookie jar" to map these keys to the associated session. separate cookie jar server 48, as illustrated in Figure 3 has been found desirable to minimize the load on the dispatch server 46. This form of session management also functions as an authentication of each HTTPS request, adding an additional level of security to the overall process.

As illustrated in Figure 3, after one of the DMZ Web servers 44 decrypts and verifies the user session, it forwards the message through a firewall 55b over a TCP/IP connection 33 to the dispatch server 46 on a new TCP socket while the original socket 32 from the browser is blocking, waiting for a response. The dispatch server 46 will unwrap an outer protocol layer of the message from the DMZ services cluster 44, and will

5

10

15

20

25

reencrypt the message with symmetric encryption and forward the message to an appropriate application proxy via a third TCP/IP socket 37. While waiting for the proxy response, all three of the sockets 32, 33, 37 will be blocking on a receive. Specifically, once the message is decrypted, the wrappers are examined to reveal the user and the target middle-tier (Intranet application) service for the request. A first-level validation is performed, making sure that the user is entitled to communicate with the desired service. The user's entitlements in this regard are fetched by the dispatch server 46 from StarOE server 69 at logon time and cached.

If the requestor is authorized to communicate with the target service, the message is forwarded to the desired service's proxy. Each application proxy is an application specific daemon which resides on a specific Intranet server, shown in Figure 3 as a suite of mid-range servers 60. Each Intranet application server of suite 60 is generally responsible for providing a specific back-end service requested by the client, and, is additionally capable of requesting services from other Intranet application servers by communicating to the specific proxy associated with that other application server. Thus, an application server not only can offer its browser a client to server interface through the proxy, but also may offer all its services from its proxy to other application In effect, the application servers servers. requesting service are acting as clients to the application servers providing the service. Such

5

10

15

20

25

mechanism increases the security of the overall system as well as reducing the number of interfaces.

The network architecture of Figure 3 may also include a variety of application specific proxies having associated Intranet application servers including: a StarOE proxy for the StarOE application server 69 for handling authentication order entry/billing; an Inbox proxy for the Inbox application server 61, which functions as a container for completed reports, call detail data and marketing news messages, a Report Manager Proxy capable of communicating with a system-specific Report Manager server 62 for generating, managing and scheduling the transmission of customized reports including, for example: call usage analysis information provided from the StarODS server 63; network traffic analysis/monitor information provided from the Traffic view server 64; virtual data network alarms and performance reports provided by Broadband server 65; trouble tickets for switching, transmission and traffic faults provided by Service Inquiry server 66; and toll free routing information provided by Toll Free Network Manager server 67.

As partially shown in Figure 3, it is understood that each Intranet server of suite 60 communicates with one or several consolidated network databases which include each customer's network management information and data. In the present invention the Services Inquiry server 36 includes communication with MCI's Customer Service Management legacy platform 80(a). Such network management and customer network data is

5

10

15

20

25

additionally accessible by authorized MCI management personnel. As shown in Figure 3, other legacy platforms 80(b), 80(c) and 80(d) may also communicate individually with the Intranet servers for servicing specific transactions initiated at the client browser. The illustrated legacy platforms 80(a)-(d) are illustrative only and it is understood other legacy platforms may be interpreted into the network architecture illustrated in Figure 3 through an intermediate midrange server 60.

Each of the individual proxies may be maintained on the dispatch server 46, the related application server, or a separate proxy server situated between the dispatch server 46 and the midrange server 30. The relevant proxy waits for requests from an application client running on the customer's workstation 50 and then services the request, either by handling them internally or forwarding them to its associated Intranet application server 60. The proxies additionally receive appropriate responses back from an Intranet application server 60. Any data returned from the Intranet application server 60 is translated back to client format, and returned over the internet to the client workstation 50 via the Dispatch Server 46 and at one of the web servers in the DMZ Services cluster 44 and a secure sockets When the resultant response header and connection. trailing application specific data are sent back to the client browser from the proxy, the messages will cascade all the way back to the browser 14 in real time, limited only by the transmission latency speed of the network.

-22-

5

10

15

20

25

The networkMCI Interact middle tier software includes a communications component offering three (3) types of data transport mechanisms: 1) Synchronous; 2) Asynchronous; and 3) Bulk transfer. Synchronous transaction is used for situations in which data will be returned by the application server 60 quickly. Thus, a single TCP connection will be made and kept open until the full response has been retrieved.

Asynchronous transaction is supported generally for situations in which there may be a long delay in application server 60 response. Specifically, a proxy will accept a request from a customer or client 50 via an SSL connection and then respond to the client 50 with a unique identifier and close the socket connection. The client 50 may then poll repeatedly on a periodic basis until the response is ready. Each poll will occur on a new socket connection to the proxy, and the proxy will either respond with the resultant data or, respond that the request is still in progress. This will reduce the number of resource consuming TCP connections open at any time and permit a user to close their browser or disconnect a modem and return later to check for results.

Bulk transfer is generally intended for large data transfers and are unlimited in size. Bulk transfer permits cancellation during a transfer and allows the programmer to code resumption of a transfer at a later point in time.

Figure 6 is a diagram depicting the physical networkMCI Interact system architecture 100. As shown in Figure 6, the system is divided

5

10

15

20

25

into three major architectural divisions including:

1) the customer workstation 50 which include those mechanisms enabling customer connection to the Secure web servers 44; 2) a secure network area 47, known as the DeMilitarized Zone "DMZ" set aside on MCI premises double firewalled between the both the public Internet 85 and the MCI Intranet to prevent potentially hostile customer attacks; and, 3) the MCI Intranet Midrange Servers 60 and Legacy Mainframe Systems 80 which comprise the back end business logic applications.

As illustrated in Figure 6, the present invention includes a double or complex firewall system that creates a "demilitarized zone" (DMZ) between two firewalls 55a, 55b. In the preferred embodiment, one of the firewalls 55b includes port specific filtering routers, which may only connect with a designated port address. For example, router 84 (firewall 55(a)) may connect only to the addresses set for the HydraWeb® (or web servers 44) within the DMZ, and router 86 (firewall 55(b)) may only connect to the port addresses set for the dispatch server 46 within the network. addition, the dispatch server 46 connects with an authentication server, and through a proxy firewall This ensures that even to the application servers. if a remote user ID and password are hijacked, the only access granted is to one of the web servers 44 or to intermediate data and privileges authorized for that user. Further, the hijacker may not directly connect to any enterprise server in the enterprise intranet beyond the DMZ, thus ensuring internal company system security and integrity.

5

10

15

20

25

Even with a stolen password, the hijacker may not connect to other ports, root directories or application servers within the enterprise system, and the only servers that may be sabotaged or controlled by a hacker are the web servers 44.

The DMZ 47 acts as a double firewall for the enterprise intranet because of the double layer of port specific filtering rules. Further, the web servers 44 located in the DMZ never store or compute actual customer sensitive data. The web servers only transmit the data in a form suitable for display by the customer's web browser. the DMZ web servers do not store customer data, there is a much smaller chance of any customer information being jeopardized in case of a security In the preferred embodiment, firewalls or routers 84,86 are a combination of circuit gateways and filtering gateways or routers using packet filtering rules to grant or deny access from a source address to a destination address. connections from the internal application servers are proxied and filtered through the dispatcher before reaching the web servers 44. Thus it appears to any remote site, that the connection is really with the DMZ site, and identity of the internal server is doubly obscured. This also prevents and direct connection between any external and any internal network or intranet computer.

The filtering firewalls 55(a),(b) may also pass or block specific types of Internet protocols. For example, FTP can be enabled only for connections to the In-Box server 61, and denied for all other destinations. SMTP can also be enabled to the In-Box server, but Telnet denied.

5

10

15

20

25

PCT/US98/20148 WO 99/16207

The In-box server 61 is a store and forward server for client designated reports, but even in this server, the data and meta-data are separated to further secure the data, as will be described.

As previously described, the customer access mechanism is a client workstation 51 employing a Web browser 50 for providing the access to the networkMCI Interact system via the public Internet 85. When a subscriber connects to the networkMCI Interact Web site by entering the 10 appropriate URL, a secure TCP/IP communications link 32a is established to one of several Web servers 44 located inside a first firewall 55a in the DMZ 47. Preferably at least two web servers are provided for redundancy and failover 15 capability. In the preferred embodiment of the invention, the system employs SSL encryption so that communications in both directions between the subscriber and the networkMCI Interact system are 20 secure.

In the preferred embodiment, all DMZ Secure Web servers 44 are preferably DEC 4100 systems having Unix or NT-based operating systems for running services such as HTTPS, FTP, and Telnet over TCP/IP. The web servers may be interconnected by a fast Ethernet LAN running at 100 Mbit/sec or greater, preferably with the deployment of switches within the Ethernet LANs for improved bandwidth utilization. One such switching unit included as part of the network architecture is a HydraWEB® unit 82, manufactured by HydraWEB Technologies, Inc., which provides the DMZ with a virtual IP address so

25

30

that subscriber HTTPS requests received over the Internet will always be received. The Hydraweb® unit 82 implements a load balancing algorithm enabling intelligent packet routing and providing optimal reliability and performance by guaranteeing accessibility to the "most available" server. particularly monitors all aspects of web server health from CPU usage, to memory utilization, to available swap space so that Internet/Intranet networks can increase their hit rate and reduce Web server management costs. In this manner, resource utilization is maximized and bandwidth (throughput) is improved. It should be understood that a redundant Hydraweb® unit may be implemented in a Hot/Standby configuration with heartbeat messaging between the two units (not shown). Moreover, the networkMCI Interact system architecture affords web server scaling, both in vertical and horizontal directions. Additionally, the architecture is such that new secure web servers 44 may be easily added as customer requirements and usage increases.

As shown in Figure 6, the most available Web server 44 receives subscriber HTTPS requests, for example, from the HydraWEB® 82 over a connection 44b and generates the appropriate encrypted messages for routing the request to the appropriate MCI Intranet midrange web server over connection 44a, router 86 and connection 44b. Via the Hydraweb® unit 82, a TCP/IP connection 38 links the Secure Web server 44 with the MCI Intranet Dispatcher server 46.

5

10

15

20

25

Further as shown in the DMZ 47 is a second RTM server 92 having its own connection to the public Internet via a TCP/IP connection 88. This RTM server provides real-time session management for subscribers of the networkMCI Interact Real Time Monitoring system. An additional TCP/IP connection 88a links the RTM Web server 92 with the MCI Intranet Dispatcher server 46. further shown in Figure 6, a third router 87 is provided for routing encrypted subscriber messages from the RTM Web server 92 to the Dispatcher server 46 inside the second firewall. Although not shown, each of the routers 86, 87 may additionally route signals through a series of other routers before eventually being routed to the nMCI Interact Dispatcher server 46. In operation, each of the Secure servers 44 function to decrypt the client message, preferably via the SSL implementation, and unwrap the session key and verify the users session from the COUser object authenticated at Logon.

After establishing that the request has come from a valid user and mapping the request to its associated session, the Secure Web servers 44 will re-encrypt the request using symmetric RSA encryption and forward it over a second socket connection 38 to the dispatch server 46 inside the enterprise Intranet.

As described herein, the data architecture component of networkMCI Interact reporting system is focused on the presentation of real time (un-priced) call detail data, such as provided by MCI's TrafficView Server 64, and priced

5

10

15

20

25

call detail data and reports, such as provided by MCI's StarODS Server 63 in a variety of user selected formats.

All reporting is provided through a Report Requestor GUI application interface which support spreadsheet, a variety of graph and chart types, or both simultaneously. For example, the spreadsheet presentation allows for sorting by any arbitrary set of columns. The report viewer may also be launched from the inbox when a report is selected.

A common database may be maintained to hold the common configuration data which can be used by the GUI applications and by the mid-range servers. Such common data will include but not be limited to: customer security profiles, billing hierarchies for each customer, general reference data (states, NPA's, Country codes), and customer specific pick lists: e.g., ANI's, calling cards, etc.. An MCI Internet StarOE server will manage the data base for the common configuration of data.

Report management related data is also generated which includes 1) report profiles defining the types of reports that are available, fields for the reports, default sort options and customizations allowed; and 2) report requests defining customer specific report requests including report type, report name, scheduling criteria, and subtotal fields. This type of data will be resident in an Inbox server database and managed by the Inbox server.

The Infrastructure component of the nMCI Reporting system includes means for providing secure communications regardless of the data

5

10

15

20

25

. `-

content being communicated. The nMCI Interact system security infrastructure includes: 1) authentication, including the use of passwords and digital certificates; 2) public key encryption, such as employed by a secure sockets layer (SSL) encryption protocol; 3) firewalls, such as described above with reference to the network architecture component; and 4) non-repudiation techniques to guarantee that a message originating from a source is the actual identified sender. One technique employed to combat repudiation includes use of an audit trail with electronically signed one-way message digests included with each transaction.

Another component of the nMCI Interact infrastructure includes order entry, which is supported by the Order Entry ("StarOE") server. The general categories of features to be ordered include: 1) Priced Reporting; 2) Real-time reporting; 3) Priced Call Detail; 4) Real Time Call Detail; 5) Broadband SNMP Alarming; 6) Broadband Reports; 7) Inbound RTM; 8) Outbound RTM; 9) Toll Free Network Manager; and 10) Call Manager. The order entry functionality is extended to additionally support 11) Event Monitor; 12) Service Inquiry; 13) Outbound Network Manager; 14) Portfolio; and, 15) Client View.

The Self-monitoring infrastructure component for nMCI Interact is the employment of mid-range servers that support SNMP alerts at the hardware level. In addition, all software processes generate alerts based on process health, connectivity, and availability of resources (e.g.,

5

10

15

20

25

disk usage, CPU utilization, database availability).

The Metrics infrastructure component for nMCI Interact is the employment of means to monitor throughput and volumes at the Web servers, dispatcher server, application proxies and midrange servers. Metrics monitoring helps in the determination of hardware and network growth.

To provide the areas of functionality described above, the client tier 50 is organized into a component architecture, with each component providing one of the areas of functionality. The client-tier software is organized into a "component" architecture supporting such applications as inbox fetch and inbox management, report viewer and report requestor, TFNM, Event Monitor, Broadband, Real-Time Monitor, and system administration applications. Further functionality integrated into the software architecture includes applications such as Outbound Network Manager, Call Manager, Service Inquiry and Client View.

The present invention focuses on the client and middle-tier service and application proxy components that enable customers to request, specify, customize, schedule and receive their telecommunications network call detail data and account information in the form of reports that are generated by the various back-end application servers. Referred to herein as "StarWRS", this WWW/Internet Reporting System 200, as shown in Figure 7, comprises the following components and messaging interfaces:

 those components associated with the Client GUI front end including a report requestor

5

10

15

20

25

<u>.</u> -

·-

client application 212, a report viewer client application 215 and, an Inbox client application 210 which implement the logical processes associated with a "Java Client", i.e., employs Java applets launched from the backplane (Figure 3) that enable the display and creation of reports and graphs based on the fields of the displayed reports, and, allows selection of different reporting criteria and options for a given report; and,

enabling the above-mentioned reporting functionality including: a Report Manager server 250, a Report scheduler server 260, and an Inbox Server 270. Also shown in Figure 7 are the system Order Entry client application 280 and a corresponding Order Entry Server 285 supporting the StarWRS reporting functionality as will be described.

Each of these components will now be described with greater particularity hereinbelow.

The Report Manager ("RM") server 250 is an application responsible for the synchronization of report inventory with the back-end "Fulfilling" servers 300; retrieval of entitlements, i.e., a user's security profiles, and report pick list information, i.e., data for user report customization options, from the system Order Entry server 280; the transmission of report responses or messages to the Dispatcher server 26 (Figure 7); the maintenance of the reporting databases; and, the management of metadata used for displaying reports. In the preferred embodiment, the RM

5

10

15

20

25

server 250 employs a Unix daemon that passively listens for connect requests from the GUI client applications and other back-end servers and deploys the TCP/IP protocol to receive and route requests and their responses. Particularly, Unix stream sockets using the TCP/IP protocol suite are deployed to listen for client connections on a well-known port number on the designated host machine. Client processes, e.g., report requestor 212, wishing to submit requests connect to RM 250 via the dispatcher 26 by providing the port number and host name associated with RM 250. Request messages received by the RM server are translated into a "metadata" format and are validated by a parser object built into a report manager proxy 250' that services requests that arrive from the GUI front-end. If the errors are found in the metadata input, the RM 250 returns an error message to the requesting client. If the metadata passes the validation tests, the request type will be determined and data will be retrieved in accordance with the metadata request after which a response will be sent back to the requesting client.

As shown in Figure 7, interface sockets 252 are shown connecting the Dispatcher server 46 and the RM server 250 and, other socket connections 254, 256 provide the interface between the RM 250 and respective middle tier systems 400 and 500. For instance, fulfilling system 400 receives requests for a customer's priced billing data through a publish-and-subscribe Talarian smart

5

10

15

20

25

socket messaging interface 350 providing guaranteed message delivery of messages from the Report Manager. It should be understood that the RM 250 server can manage reporting data for customer presentation from other middle-tier and back-end legacy systems including, e.g., TrafficView, Broadband, Service Inquiry, etc. in order to present to a customer these types of network management data.

The report manager server additionally utilizes a database 258, such as provided by Informix, to provide accounting of metadata and user report inventory. Preferably, an SQL interface is utilized to access stored procedures used in processing requests and tracking customer reports. A variety of C++ tools and other tools such as Rogue Wave's tools.h++ are additionally implemented to perform metadata message parsing validation and translation functions.

The Report Manager server 250 additionally includes the scheduling information, however, a report scheduler server component passes report requests to the back-end fulfilling systems 400, 500 at the scheduled times.

The Report Scheduler ("RS") server component 260 is a perpetually running Unix daemon that deploys the TCP/IP protocol to send requests to the back-end fulfilling servers 400, 500, and receive their responses. More particularly, the RS server 260 is a Unix server program designed to handle and process report requests to the fulfilling servers by deploying Unix stream sockets

5

10

15

20

25

using the TCP/IP protocol suite, and sending the report request to client connections on a well-known port number on the designated host machine. As shown in Figure 7, interface socket connections 264, 266 are shown interfacing with respective back end servers 400 and 500. In the case of priced billing data from a StarODS fulfilling server 400, report requests are published by the RS server 260 to a pre-defined subject on the Talarian Server. When handling other incoming messages published by back end servers using Talarian SmartSockets 4.0, another daemon process is provided that uses Talarian C++ objects to connect their message queue and extract all messages for a given subject for storage in a database table included in database 263. message includes the track number of the report that was requested from the fulfilling server.

From the report scheduler interface, the user may specify the type of reporting, including an indication of the scheduling for the report, e.g., hourly, daily, weekly or monthly. For priced data the user has the option of daily, weekly, or monthly. For real-time, or unpriced data, the user has the option of hourly, daily, weekly or monthly. The report scheduler interface additionally enables a user to specify a page or E-mail account so that a respective page or e-mail message may be sent to indicate when a requested report is in the Inbox server 270.

10 A 10 A 10 A 10 A

5

10

15

20

25

As shown in Figure 7, the report scheduler server 260 interfaces directly with the Report Manager server 250 to coordinate report request processing. The respective report management and scheduling functions could be performed in a single server.

The Inbox Server component 270 serves as the repository where the completed user report data is stored, maintained, and eventually deleted and is the source of data that is uploaded to the client user via the dispatcher over a secure socket It is also a Unix program that is connection 272. designed to handle and process user requests submitted in metadata format using an Informix database. Once report results are received from the StarODS 400 and TVS 500 and any other middle tier or fulfilling servers, the Inbox server 270 requests the metadata from the Report Manager server 250 as indicated by the socket connection The metadata is stored in the 272 in Figure 7. Inbox server database 273 along with the report results. Thus, if the metadata is required to be changed, it will not interfere with the information needed to display the reports contained in the Inbox. Additionally, as shown in Figure 7, the Inbox server interfaces with the report scheduler to coordinate execution and presentation of reports.

The StarOE server 280 is the repository of user pick lists and user reporting entitlements as shown in database 283. Particularly, it is

5

10

15

20

25

shown interfacing with the Inbox server 270 and report scheduler servers 260. The Report Manager does not interface with or include metadata for StarOE. It will, however, include information in the report metadata that will tell the Report Requestor it needs to get information (i.e., Pick Lists) from StarOE server 285. Particularly, as shown in Appendix A, the StarOE server supports pick lists for the selection of priced data based on the following list: Date, Time (e.g., provided in GMT offset), ID Accounting Code (IDACC)/Supp code, Access Type, Corp ID, Service Location w/Service Location Names, Bill Payer w/Bill Payer Names, 8XX Number, City, State/Province, Numbering Plan Area (NPA), NXX (Exchange code where N=2-9 and X=0-9), and Country Code.

A common database is maintained to hold the common configuration data which can be used by the GUI applications and by the mid-range servers. Such common data will include but not be limited to: customer security profiles, billing hierarchies for each customer, general reference data (states, NPAs, Country codes), and customer specific pick lists: e.g., ANIs, calling cards, etc..

With regard to the front-end client GUI components, the above-mentioned Inbox client application 210 functions as an interface between the client software and the Inbox server 270 for presenting to the customer the various type of reports and messages received at the Inbox including all completed reports, call detail, alarms, and news. Preferably, the messages for the

5

10

15

20

25

user in the inbox is sorted by type (e.g., report, call detail, alarms) and then by report type, report name, date, and time.

application uses the services of the backplane (Figure 3) to launch other applications as needed to process report messages. The inbox will also use the services of the data export objects to provide a save/load feature for inbox messages, and, is used to provide a user-interface for software upgrade/download control. Inbox messages are generated by the versioning services of the backplane; actual downloads will be accomplished by a request through the inbox.

In the preferred embodiment, the inbox client receives information on multiple threads to allow a high priority message to get through even if large download is in progress. Typically, the browser is configured to allow more than one network connection simultaneously, i.e., the polling thread on the client uses a separate connection to check for new messages, and start a new thread on a new connection when a new message was detected. In this way, multiple messages may be downloaded simultaneously.

The Report Requester application 212 is a GUI Applet enabling user interaction for managing reports and particularly includes processes supporting: the creation, deletion, and editing of the user's reports; the retrieval and display of selected reports; the display of selected option

5

10

15

20

25

data; and the determination of entitlements which is the logical process defining what functionality a user can perform on StarWRS. In the preferred embodiment, a Report request may be executed immediately, periodically, or as "one-shots" to be performed at a later time. As described herein, the report scheduler service maintains a list of requested reports for a given user, and forward actual report requests to the appropriate middletier servers at the appropriate time. Additional functionality is provided to enable customers to manage there inventory, e.g., reschedule, change, or cancel (delete) report requests.

The Report Viewer application 215 is a GUI Applet enabling a user to analyze and display the data and reports supplied from the StarODS fulfilling system 400. Particularly, the Report Manager 250 includes and provides access to the metadata which is used to tell the Report Requestor what a standard report should look like and the "pick-list" options the user has in order for them to customize the standard report. It is used to tell the Report Viewer client how to display the report, what calculations or translations need to be performed at the time of display, and what further customization options the user has while viewing the report. It additionally includes a common report view by executing a GUI applet that is used for the display and graphing of report data and particularly, is provided with spreadsheet management functionality that defines what

9

5

10

15

20

25

operations can be performed on the spreadsheet including the moving of columns, column hiding, column and row single and multiple selection, import and export of spreadsheet data, and printing of spreadsheet, etc. It is also provided with report data management functionality by defining what operations can be performed on the data displayed in a spreadsheet including dynamic operations as sorting of report data, sub-totaling of report data, etc.. Furthermore, the report viewer 215 interprets metadata; and, communicates with the Backplane (Figure 4). The report viewer application 215 additionally accepts messages telling it to display an image or text that may be passed by one of the applications in lieu of report data (e.g., Invoice, Broadband report, etc.)

All reporting is provided through the Report Viewer interface which supports spreadsheet, a variety of graphic and chart types, or both types simultaneously. The spreadsheet presentation allows for sorting by any arbitrary set of columns. The report viewer 215 is launched from the inbox client 210 when a report is selected and may also be launched from the inbox when a report is selected.

By associating each set of report data which is uploaded from the Inbox server 270 with a "metadata" report description object, reports may be presented without a report-specific presentation code. At one level, metadata descriptions function like the catalog in a relational database,

-40-

5

10

15

20

25

describing each row of a result set returned from the middle tier as an ordered collection of columns. Each column has a data type, a name, and a desired display format, etc. Column descriptive information will be stored in an object, and the entire result set will be described by a list of these objects, one for each column, to allow for a standard viewer to present the result set, with labeled columns. Nesting these descriptions within one another allows for breaks and subtotaling at an arbitrary number of levels. The same metadata descriptions may be used to provide common data export and report printing services. When extended to describe aggregation levels of data within reporting dimensions, it may be used for generic rollup/drilldown spreadsheets with "just-in-time" data access.

The metadata data type may include geographic or telecommunications-specific information, e.g., states or NPAs. The report viewer may detect these data types and provide a geographic view as one of the graph/chart types.

Referring now to Figure 8, there is shown the high-level logical approach of the StarODS data management system 400 integrated with the StarWRS component 200 of the nMCI Interact architecture. Generally, the data management system 400 of the invention, referred to herein as "StarODS", provides customers with priced reporting data pertaining to telecommunications services. Although the description herein pertains to priced

5

10

15

20

25

billing data, it should be understood that the principles described herein could apply to any type of reporting data. Through StarWRS web-based reporting, the StarODS system provides priced reporting data and implements a DataMart approach for maintaining the data used for customer reporting. StarODS stores and incrementally processes customer's priced data included in call detail records, and loads this processed data in Data Marts. From these data marts customer's priced reporting data may be provided to customers on a daily basis via the StarWRS reporting system.

For priced reporting data, report categories from which a variety of reports can be generated include: a) Financial category - for providing priced data reports relating to longest calls, most expensive calls, Off Peak Calls, payphone report, usage summary, calling card summary, and area code summary for Toll Free, VNET, Vision, and CVNS customers; b) Marketing category for providing priced data reports relating to country code summary, state summary, frequent numbers, frequent area code summary, frequent state, and frequent cities; c) Telecommunications category - for providing priced data reports relating to call duration summary, IDACC/Supp Code Summary and Call Access Summary for Toll Free, VNET, Vision, CVNS customers; d) Call Center report category- for providing priced data reports relating to most active toll free numbers, Hourly Distribution, Day of Week Distributions, state summary, and country code summary for their Toll

5

10

15

20

25

Free, VNET, Vision, CVNS customers; e) Monitor
Usage - for providing priced data reports relating
to longest calls, most expensive calls, most active
calling card and most active toll free numbers for
their Toll Free, VNET, Vision, CVNS customers; f)
Analyze Traffic - area code summary, country code
summary, state summary, range summary, city
summary, frequent numbers, payphone report, usage
summary, calling card summary, IDACC/Supp Code
Summary, Day of Week Distributions, Hourly
Distribution, Call Access Summary and review calls;
and, a g) Check Calling Frequencies category - for
reporting on frequent numbers, frequent area code,
frequent country codes, frequent state and frequent
cities.

Figure 8 illustrates the primary components implemented in the StarODS priced reporting data management component 400. As shown in Figure 8, a first traffic feed 405 provides raw call detail records from external network switches, translates and sorts the data into billable records for input into two systems: a Commercial Billing system ("NCBS") mainframe server process 410 for pricing the records at tariff for customers subscribing to, e.g., MCI's VNET and Vision telecommunications products; and, a toll-free billing server process 420 for pricing the records at tariff for customers subscribing to toll-free telecommunications products. A common data gateway component 430 including a mainframe extract process 435 and a data harvesting process 440 receives these inputs on both a daily and monthly basis for

5

10

15

20

25

processing. Particularly, the mainframe extract process 435 creates a selection table including all subscribing customers, compresses files for transmissions and extracts priced reporting records from the runstreams. The harvesting process 440 is responsible for performing data validations, filtering, data translations, data grouping, data routing, and data logging functions. According to a dimension table based on data within selected BDRs, the harvesting process applies business rules to the data, cleanses the data, transforms the data, creates load files for DataMarts and compresses files for storage in the DataMarts. harvesting component 440 may additionally perform an aggregation function for supporting long term storage and rapid access of data for customer reporting, and performs trigger actions/events based on predefined criteria.

Additionally, as shown in the Figure 8, other external systems and applications may interface with the common data gateway component 430 including: Cyclone Billing system 422a and Concert Virtual Network Services 422b which provide additional billing detail records; and, a calling area database 425 which provides geographical reference information, i.e., identify city, state and country information.

After the data has been processed in the Harvesting component 440 it is input to an operational data store component ("ODS") 450 that stores the billing detail records and dimension

-44-

5

10

15

20

25

tables as a data model. This ODS layer 450 is comprised of all data harvested from all applications in the data harvesting layer 430, and feeds report-supporting DataMarts 470 in a manner which supports customized data access. Datamarts may be engineered to pre-process data, create aggregates, and otherwise perform transformations on the data prior to DataMart loading 465 in order to implement a defined data model, e.g., star schema key structures, fact and dimension tables depicted as block 460. preferred embodiment, as shown in Figure 8, the Operational Data Store 450 includes multiple datamarts 470 each for storing and retrieving daily and monthly priced data on a periodic basis. primarily is responsible for hosting highly current data, typically at least 72 hours old. In accordance with customer-reporting needs, data marts 470 are partitioned in accordance with partitioning schemes which, in the invention, is based on customer-ID. Particularly, each DataMart is engineered for servicing specific customers or specific product sets, as well as engineered for the specific requirements of the customer/product such as high insert activity, heavy reporting requirements, etc. As data is volatile and changing and may not produce consistent results for the same query launched at multiple times, ODS is engineered for high performance through appropriate storage technologies and parallel processing. Although not shown, a common data warehouse is

5

10

15

20

25

provided in this ODS layer that is responsible for performing storage, retrieval and archiving of data, typically of relaxed currency (e.g., more than 24 hours) and is targeted at trend analysis and detection. In the preferred embodiment, the datamarts utilize an Informix database in a star topology.

Particularly, as illustrated in Figure 9, the data model 459 is one component comprising the priced reporting data store. In the preferred embodiment, the data model of StarODS is a dimensional or "star schema" model, including a central fact table multiply joined to a number of attendant tables known as dimensions. relationships between the fact table and the dimensional tables are either enforced through keys, which may be generated, or as lookup codes. As shown in Figure 9, the central fact table 461, referred to herein as "Perspective Base," provides access to a collection of attributes or facts concerning a call. The dimensional tables include the following: an Access Termination table 462 comprising data indicating whether a call was charged to recipient (inbound) or originator (outbound); an Access Type table 464 comprising data indicating the type of access (for outbound calls) or egress (for inbound calls) characteristics of a call; a Billing Corp table 466 comprising data indicating the hierarchical status of a customer for the purposes of billing charges for products and features; a Toll Free Number table

-46-

5

10

15

20

25

468 comprising data indicating any dialed number in which the three digits following the country code (1 for USA) is currently either 800 or 888; a Product Type table 469 comprising data indicating the product for which services are bundled for the purpose of invoicing; a GMT table 471 comprising date and time data adjusted to the Greenwich Mean Time Zone; a LST table 473 comprising date and time data adjusted to the local MCI switch which permitted access to the MCI network; an Orig_Geo table 476 comprising data indicating the geographic characteristics of a call's origination; a Term_Geo table 477 comprising data indicating the geographic characteristics of a call's termination; a Report Geo table 478 comprising data indicating the geographic characteristics of a call's origination or termination; an Idacc table 479 comprising data indicating a customer's defined id and/or accounting code; a Data Stream table 481 comprising data relating to the line speed characteristics of a data (non-voice) call; a Pay Phone table 482 comprising data denoting calls originating from a payphone; a Usage table 483 comprising data indicating the geographic attributes of a call which affect Tariff rates; an EVS Product table 484 comprising data representing Enhanced Voice Services products; a Directory Assistance table 486 comprising data indicating those calls requesting Directory assistance; a Range table 487 comprising data indicating distance bands a call may fall into; an NCR table 488 indicating Network Call

5

10

15

20

25

Redirect calls; a Cell Phone table 489 comprising cellular call characteristics data; a VOS table 491 indicating Voice Operator Services calls; a Conference Call table 492 having data pertaining to characteristics of conference calls; a Cross Corp table 493 comprising data indicating inbound cross corporate routing of calls; a Currency table 494 indicating unit of currency for call prices; a card table 496 comprising data for billing calls to a location that may not be the one which originated the call an NCT table 497 comprising data representing Network Call Transfers; an Amount Range table 498 indicating call usage ranges based upon amounts; and, a Duration Range table 499 indicating call usage durations based on amounts. This star schema model is optimized for decision support and the retrieval of large amounts of data. Appendix H provides the data attributes of each of these dimension tables. As known, in the dimensional model, the grain of data stored in the fact table determines what level of data can be drilled down into. It should be understood that the grain of the data stored in the Perspective Base table is at the singular call level. As described herein, from the data

As described herein, from the data included in these data marts, one-time or recurring priced data reports are available for reporting through the NMCI Interact StarWRS reporting system 200.

Additionally, referring back to Figure 8 there is provided a Decision Support Server ("DSS")

5

10

15

20

25

reporting engine component 475 that performs the following functions: 1) receives various customer report requests from the StarWRS GUI Report Requestor component and accordingly generates database queries; 2) routes the query to the appropriate data marts 470, data warehouse or operational data store; and, 3) responds to the requestor with a formatted result set. The DSS server 475 may also perform cost estimation, agent scheduling, workflow broadcasting interface, and transaction logging functions. In the preferred embodiment, the DSS 475 is a cluster of DEC (Digital Equipment Corp.) UNIX 8400 servers running Information Advantage® software accessing an Informix database, e.g., Informix Dynamic Server V.7.3. database product, distributed across multiple Data Marts.

In accordance with the invention, the primary function of the DSS 475 is to generate priced billing report data in accordance with the customer's request which is received from the StarWRS reporting component as a metadata message. To accomplish this, the DSS interfaces with two StarWRS systems: Report Manager 250, and Inbox 270, as shown in Figure 8. The Report Manager/Scheduler formats the customer's request in accordance with a defined set of rules and sends a metadata request message to the DSS. The DSS 475 reads the customer's metadata descriptions of the type of priced data report requested by a customer, translates the metadata into database queries, and

5

10

15

20

25-

implements commercial off-the-shelf ("COTS") tools such as Information Advantage's Decision Suite™ to generate SQL queries, and run the queries against the data in the DataMarts. Afterwards, the query results are formatted by a formatter process into a form readable by StarWRS report viewing components, and the completed reports are transmitted to the directory of the customer's Inbox, e.g., via FTP.

In the preferred embodiment, a publishand-subscribe communications tool such as Talarian SmartSockets™ messaging middleware is used to coordinate report requests transmitted from the StarWRS report Manager to DSS, and report completion notification from DSS to the StarWRS The Report Manager formats the Report Manager. customer's request in accordance to a defined set of rules and sends the request to the DSS as a Talarian message with the Report Manager 250 maintaining the Talarian Sender program, and the Decision Support Server 475 maintaining the Talarian Receiver program. Messages are sent with guaranteed message delivery ("GMD"), thus assuring all request data sent by RM is received by the DSS. As known, Talarian messaging middleware defines a message as types and subjects. A message type is a structure that defines the format of the message. Message subjects are subsets of message types and describe messages by which Talarian receivers can subscribe. Conversely, message subjects describe messages by which Talarian senders publish.

5

10

15

20

25

As depicted in greater detail in Figure 10(a), a Report Manager/DSS application programming interface "API" 480 is provided whereby the RM server 250 publishes the message to the Decision Support Server in response to its receipt of a report request. Subsequently, the DSS 475 returns a "Message Received" message. When the DSS has processed the request, it publishes the message to the RM 250 with the name and location of the report file or an error message to the Report Manager, via an "NRL" metadata message as described herein.

Figure 10(b) illustrates an DSS/Report
Manager application programming interface "API"
485. In the preferred embodiment, all return
messages are persistent. Thus, as shown in Figure
8 the DSS incorporates a Talarian message queue 490
operating on a First-In-First-Out (FIFO) basis. If
the DSS is unable to establish the connection with
Talarian, or there is an error in transmission, the
DSS queues all messages, and continues to retry
until a successful send is executed.

Similarly, a DSS/Inbox API is provided to manage FTP file transmissions including: error handling, retry logic, and the ability to maintain the file name and location of where report files are stored. Particularly, the DSS/Inbox API sends the report file to the inbox (Figure 8). If the DSS has generated an error condition, and the report is unable to be generated, an error message will be sent to the inbox in place of the report file. In either case, a return message will be

5

10

15

20

25

delivered to the DSS/Report Manager API 485 indicating a successful or unsuccessful generation and transmission of the report file.

More particularly, as shown in Figure 12(a), an RTServer process 377 is provided for 5 maintaining connections, ensuring guaranteed message delivery, and tracking the success of all messaging operations. As the Report Manager interfaces with multiple systems, the RTServer 377 processes are located in the RM. The DSS is 10 provided with RTClient processes 377a,b that provides the API to RTServer: one RTClient 377a for providing the API to Report Manager for receiving messages; and, a second RTClient 377b for providing the API for the NRL. However, it should be 15 understood that other ODS boxes can have one RTClient. The RM and Arbitrators 360a,b use the GMD feature of Talarian to deliver messages. RM/Inbox communication is not affected by outages of ODS server as the arbitrator and ODS 20 communication is independent of RM/Inbox communication.

In the preferred embodiment, the DSS architecture is transparent to the Report Manager which publishes Talarian messages to which the DSS will subscribe. In addition to the tokenized character string request message which specifies report type, filters, and any customer request-specific information, RM server provides additional fields as part of the Talarian request message including: a Corp_ID, Priority, and RequestID.

25

Corp_ID allows the DSS to route the request to the appropriate data store without having to invoke a parser. Data are partitioned on Corp_ID in the ODS database warehouse. Request_id is used to send back an ARDA failure message, in the event of an invalid message. The Priority field allows DSS to pickup the next high priority request from a queue of non-processed requests, without invoking the parser.

Figure 11(b) illustrates the 10 implementation of the COTS Information Advantage® Interface Object ("IAIO") 372, which is a process running in the DSS 475 for performing the following functions: 1) publishes and subscribes Talarian messages to Report Scheduler; 2) parses the request 15 metadata ARD (Add Report Definition) message; 3) publishes an ARDA (Add Report Definition Acknowledgment); 4) populates a request table 390 with total, sub-total and sort information according to the received report request; 5) 20 transforms the ARD tokens from the metadata request into an overlay file 392 which is a text file that is submitted to IA's Decision Suite™ process to generate the corresponding SQLs; 6) updates a Request Status table 391 with appropriate status, 25 e.g., process complete, failed, in progress, etc.; and, 7) if a failure occurs, it updates an error log (not shown).

More particularly, in view of Figure
11(b), ARD metadata request messages are received
into the ODS system via arbitrator processes 360a,b

30

which are responsible for routing the request message to the appropriate ODS database according to a Corp/ODS mapping table 365. Report Manager publishes a single message subject "Arbitrator" having the above-mentioned request, Corp_ID, and Priority field information. Report Manager uses a round robin message delivery mechanism complemented by Talarian's GMD to publish messages to the subject Arbitrator 360a,b. The arbitrator extracts the Corp_ID field from the message and maps the Corp_ID to corresponding ODS DataMart in the table 365 it maintains. The arbitrator then republishes the message with the ODS#. As shown in the Figure 11(b), a second arbitrator process 360b is provided to assure fail-over capabilities.

In Figures 11(a) and 11(b), a Talarian receiver, referred to herein as a Talarian Interface Object ("TIO") 370, is a process that receives the Talarian message, manages the GMD functionality, and posts updates to the request table 390 and request status table 391. As shown in Figure 11(b), the TIO receivers 370 subscribe to a subject "ODS#." The receiver inserts the message received from the arbitrator into the request table 390 and request status table 391 along with the priority, timestamp and status fields. The request status table resides on the ODS database and the messages are stored in the queue to provide queuing, log and tolerance from the failures. determine the pending messages to be processed, status field and history_stat flags are used.

5

10

15

20

25

Appendix "I" illustrates the contents of the ODS Request table 390 and Request Status tables 391, which are part of the ODS database.

In the preferred embodiment, the tables provided in Appendix I include: an "informix".request table 390 (Figure 11(a)) which is the table maintained for the purpose of holding specific report request information from the received ARD message, and, an "informix".req_status for holding status of DSS processes for the current request.

Thus, for the example ARD message provided in Appendix I, the request table 390 will be populated to include: a "request_id," which is the unique identifier for the request; a "msg_desc," representing a copy of the ARD message; "unique_fname," which is the unique name assigned to each request to enable tracking of individual report requests and is additionally assigned to the report returned to the report manager; a "report_dir" indicating the location of the report that Decision Suite™ generates (which may be a tab delimited report file); "format_dir" indicating the location where the report formatter generates (comma delimited file); "inbox_dir" indicating the location on the Inbox (Report Manager) where the report is sent; "inbox_fsize" indicating the size of the file; "entpid," indicating the Enterprise id which may consist of one or more corporate id's; "userid" which is an identifier assigned to each user of the system; "stdrptid"which identifies each

5

10

15

20

25

report and is similar to column id's but on the report level; "userptid" which is the user-assigned identifier for a report request; "compress" having possible values '1' = yes, '2' = no indicating if a report is to be compressed, e.g., using a standard .zip routine; "threshold" defining the number of lines that shall appear on the report; "totalmode" which defines how the report shall be totaled, subtotaled as indicated by possible values '0' = No total, No subtotal; '1' = Only Subtotal; '2' = Only Total; '3' = Total and Subtotal; "nrl_totals" indicating the formatter to total the columns specified in the "*.hdr" file. These columns are numeric and have a subtotal flag = 'y' in a column id table; "format_columns" which define derived columns on which percentages are to be calculated; "error_code" for indicating parser failure or system failure. If it's a parser failure condition, the code is returned to Report Manager; "error_desc" indicating the error description; and, "rpmgr_columns" which are the columns sent to the DSS by Report Manager. The formatter checks this list against the list in the .hdr file. Similarly, the Request_Status table 391 provided in Appendix I is populated to include the

provided in Appendix I is populated to include the status of the different processes including:

"Request_Id," i.e., the unique identifier for the request, "Priority," e.g., having a value of "1," for example, meaning adhoc; a "timestamp" which is the Informix Date Time that will be used when two or more messages have same priority; and "Status"

5

10

15

20

25

which is a char message including the following status fields: "new_message" indicating that a new message has arrived, yet to be processed; "in_IAIO" status indicating that the message is being processed by interface process IAIO; "parser_failed" status indicating an Invalid message from RM. NRL process sends a ARDA error message; "parser_success". status indicating that the message from RM is a valid message. NRL process would send a ARDA message to RM; "IAIO_complete" status indicating that the report has been generated and directory and file name fields are modified. Formatter can pick up this message; "IAIO failed" status indicating that IA has failed to generate a report, i.e., an error has occurred generating a report; "in_formatter" status indicating that the formatter is converting the text file generated by IA to a comma delimited format. The formatter may also, if required, does the percent (%) calculations, e.g., subtotals etc.; "format_success" status indicating that the formatter successfully completed translation of the file. It also populates the inbox file name, inbox file directory, nrltotal (optional) fields in the table; "format_failed" status indicating that the formatter failed to translate the text file generated by IA; "in_ftp". status indicating that the ftp process is currently sending the file to inbox; "ftp_success" status indicating that the file generated by formatter is ftp'd to inbox; "ftp_failed" status indicating that the formatted

5

10

15

20

25

file could not be ftped to inbox; "in_NRL" status indicating that the NRL process is trying to send either ARDA message or NRL message to RM; "NRL_sent" status and "ARDA-sent" status indicating that the respective NRL or ARDA message has been sent to RM. Each DSS process updates the request status table as it processes.

A further "history_stat" field may be provided in the request_status table 391 having a value, e.g., 'A' (Active) indicating that the record needs to be processed, or, indicating 'H' (History), when the record is no longer active and needs to be archived in a separate database set up for archival purposes (not shown).

As further shown in Appendix I, there are two more tables that are defined for DSS sorting and formatting processes: a Column ID Table, and a Translation table which are tables configured for the formatter process, as will be described.

As further shown in Figure 11(b), in operation, each Information Advantage® Interface Object ("IAIO") 372a,b,..n reads the status table 391 for new entries. When a new entry is posted, it invokes a parser process 393, and invokes the Information Advantage® SQL generator engine which retrieves the requested data from the database, and updates the status table 391.

Particularly, the Decision Suite™ tool receives the overlay file (Figure 11(a)) and performs the following functions: 1) generates SQL; 2) submits the SQL to the appropriate datamart (ODS database); 3) generates a Report file with a *.txt

5

10

15

20

25

extension; 4) updates Request Status table 391 with appropriate status; and, 5) if a failure occurs, updates the error log. Following generation of the *txt file, a sort process is invoked to perform the following functions: 1) reads the Request table 390 for column(s) on which to sort the Report; 2) reads the *.txt file; 3) sorts the *.txt file and generates two files: i. a file with a *.hdr extension which file contains the header information, consisting only of only column id's, and, ii. a file with a *.data extension which file contains sorted data provided in the *.txt file and is the body of the Report; 4) it further updates the request status table with a 'success' or 'failure' code; and, 5) if a failure occurs, updates the error log.

As further shown in Figure 11(b), continuously running FTP, NRL and ARDA processes are provided to take appropriate actions in accordance with the request status table entries. For example, an FTP process 378 performs the following functions: 1) reads the status table 391 for entries ready to be sent to the Inbox and FTP's the .csv or .txt to the inbox 270; 2) Determines success or failure of file transfer; 3) Updates the Request Status table 391; and, if a failure occurs, updates an error log.

The NRL (Notification of Report Location) process 382 performs the following functions: 1) reads the Request Status table 391 for any success status or failure of any process; 2) Invokes a receiver process with appropriate status and file location populated in the NRL; and, 3) If failure

5

10

15

20

25

occurs, updates the error log. Particularly, should an error occur in any of the DSS processes, an error log is updated. Error log directories may be delineated by process and day of week. Each new error generated by the same process in the same day appends the log with the new message. In either event, the NRL process returns the NRL message to Report manager indicating the status and location of any generated files.

As further shown in Figure 11(b), an ARDA process 383 reads the status table 391 for parser failures. Should the parser fail due to insufficient or missing data, ARDA process will return an ARDA message to the Report Manager with the appropriate error code. In particular, the types of conditions that result in error messages being sent to the report manager and/or local log include: i) when the request message received from the Report Manager can not be parsed due to bad data or invalid format; ii) when the SQL can not be generated due to invalid request format or parameters; iii) system or process failure; iv) cannot query database due to a database failure; etc.

For Priced Reporting, the StarWRS report requestor functionality is invoked. Particularly, the end-to-end process 600 from a priced report request to report delivery is shown in Figure 13(a) - 13(c). Specifically, a user first establishes communication with the DMZ Web server 44 and logs on to the nMCI Interact system by entering the user's name and password onto a logon dialog box. Then, an application running on the backplane

-60-

5

10

15

20

25

directs a "Validate User Message" common object to the StarOE server 280 via the web server and dispatcher servers (Figure 3) to direct the StarOE server 280 to perform security validation and authenticate the user ID and password. understood that all communication to the StarOE server is via TCP/IP with a Unix process listening on a known TCP port. The StarOE server acts as a proxy when messages are sent from the Dispatcher server 46 and supports synchronous transactions. All data and security information is accessed by direct queries to a StarOE server database 283, such as provided by Informix. Once a user is logged on, the Web Server 44 (Figures 3 and 7) requests a current list of authorized applications from the StarOE server 285. Particularly, a "Get User Application Request" message is communicated to the StarOE server via the backplane from the report requestor which queries the Informix database to obtain a list of authorized applications, i.e., services, for the user and which determines which buttons on the home page are active, thus controlling their access to products. This information is downloaded by a GUI applet that is executed via the Backplane (Figure 4) and incorporated into the home page that is presented to the user. An exemplary home page screen display 80 is shown in Figure 5 which provides a list of icons 70 representing the possible options available to the user according to that customer's entitlements.

The Report Requestor first asks for common objects for a user's default timezone,

5

10

15

20

25

language and currency. The Report Requestor objects are invoked to retrieve from StarOE the various customer entitlements relating to security, geographical hierarchy, billing hierarchy, and paging and e-mail notification.

In response to selection of the Report
Requestor icon, a display is generated to present
the reporting options to a user in accordance with
that user's entitlements as previously determined.
It should be understood that in the preferred
embodiment, the icons for applications the user has
security access to are shown bolded. Thus, for a
customer subscribing to nMCI Interact Priced
Reporting, a Priced Reporting icon is automatically
enabled when the home page appears.

Thus, upon selection of a Report Requestor icon 76 from the home page screen display 80 of Figure 5, a StarWRS report requestor web page The backplane object is presented to the customer. allows the user access to the Report Requestor front end if the user is so authorized, and a client priced reporting application is downloaded to the customer who is presented with the Priced reporting dialog screen (not shown), as indicated It is from this at step 602 in Figure 13(a). screen that the user is presented with priced reporting options to view/retrieve completed reports via the StarWRS Inbox, or create a new report or, modify an existing Priced call detail data report.

Particularly, from the Priced reporting dialog screen, the user is enabled to edit an existing report maintained in the report manager

5

10

15

20

25

inventory, generate a new report, copy an existing report, or delete an existing report. For example, as indicated at step 605 (Figure 13(a)), a user may initiate retrieval of the user report list containing existing user reports from the RM inventory, which process entails invoking the Report Requestor to initiate generation of a metadata request to download the report inventory from RM as indicated at step 610. The Report inventory for the specific user is loaded and displayed for the user on the user report request display screen, enabling the user to select a report, as indicated at step 612. Then, at step 615, the selected report is retrieved from StarWRS Report Manager and displayed for the customer.

Then, as indicated at steps 618 and 620, the customer may enter the desired reporting options and reporting criteria including: 1) the report product including toll-free, MCI Vision, and MCI Vnet options; 2) the report category which includes options for: analyzing traffic, call center, call detail, checking calling frequencies, financial, marketing, monitoring usage, and telecommunications categories for toll-free, Vnet and Vision customers; 3) the report type which includes priced call detail data or traffic data options; and 4) a report direction and which includes inbound, outbound, or both directions. Additionally, the user may select the report format associated with a reporting category.

Whether creating a new report or editing an existing report, the user is enabled to select customization options from successive dialog

5

10

15

20

25

screens (not shown) that are presented to the user showing all the report customization categories for building a new report and/or editing an existing report. From this screen and related report building dialog boxes, all of the initial values for retrieving the MetaData, customization options and GUI builder options from the report manager server 250 necessary to build (edit) a report are provided in accordance with the user's entitlements. A user may provide the following customization and report builder options: general customization options; layout customization options; access customization options; hierarchy customization options; geographic customization options; and, notification customization options.

In performing the report request process, as shown in Figure 7, the Report Requestor client application 212 gains access to the Metadata stored at the Report Manager server 250 through messaging, as indicated at step 625. Particularly, as hereinafter described, a message generated by the Report Requestor in accordance with the user request is first received by the report manager proxy 250'. In the preferred embodiment, the report manager proxy comprises a set of tools in the form of reusable objects, preferably written in C++ code, or the like. For example, a parser object tool is employed to decompose the Metadata messages sent by the report requestor 212 to validate the message. If errors are found in the Metadata input, the RM will return an error message to the requesting client. If the Metadata passes the validation tests, the request type is then

5

10

15

20

25

determined and the appropriate service will be invoked after which a standard response is sent back to the requesting client or and/or fulfilling server.

The Report Manager 250 implements stored procedures to translate the message, perform the request, and send the information back to the Report Requestor 212 which uses the metadata to determine what a standard report should look like, the customization options the user has, and the types of screens that should be used for the various options (i.e., single selection, multiple selections, etc.).

It is understood that the selection of available standard template reports is based on the user's entitlements.

The following list provides the types of requests that may be initiated by the Report Requestor 212 and the responses performed by the Report Manager 250: 1) Get/Send report template list (GRTL/SRTL) - which request retrieves the list of all standard report templates for all products and is used only to obtain general report information, e.g., report title, description, etc.; 2) Get/Send report template detail (GRTD/SRTD) which request retrieves the details of a specific standard report template; 3) Get/Send user report list (GURL/SURL) - which request retrieves the list of all user reports for the report format selected from a user report table and is used only as a request for general report information, e.g., report title, status, etc.; 4) Get/Send user report detail (GURD/SURD) - which request retrieves the

5

10

15

20

25

PCT/US98/20148 WO 99/16207

. .

details of a specific user's report; 5) Add report definition/Acknowledgment (ARD/ARDA) - which requests addition of a user-created report to a user report table. If the report is a scheduled report, this request is also communicated to the fulfilling server at the time the report is due; 6) Delete report definition/Acknowledgment (DRD/DRDA) - which request deletes a user-created report from the user table; 7) Copy report definition/Acknowledgment (CRD/CRDA) - which request definition/Acknowledgment (CRD/CRDA) - which request creates a duplication of the report the user is

creates a duplication of the report the user is editing (other than the report title) and creates a new report ID for it; 8) Update Reporting Schedule/Acknowledgment (URS/URSA) - which request updates the scheduling information on a report without having to send a Delete and Add request; and, 9) Get Pick List/Acknowledgment (GPL/GPLA) - which request enables the Report Requestor 212 to get a pick list provided by StarOE server.

In a preferred embodiment, as shown in Table 1, the interface message sent to the RM server 250 from the report requestor via the Dispatcher server 46 comprises a three to four character message acronym followed by request specific parameters.

		- :	Acceptable
Parameter	Parameter	Required	Value
122	Type		Msg acronym
Name Request	3 or 4	Yes	Msg acroni
	Characters		
Data	Characters	No	
parms	<u> </u>	J	

Table 1

-66-

5

10

15

20

25

Table 2 illustrates the interface message format returned by the RM server 250.

		Demirod	Acceptable
Parameter	Parameter	Required	ACCOP
	Туре		Value
Name		Yes	Msg acronym
Response			0 = OK or
Error Code	Char (4)	Yes	0 - 01. 02
			error
	Chan #	No	
Data	Char #	140	
parms		<u> </u>	

10

15

20

25

30

5

Table 2

As shown in Table 2, the response message to be returned in Metadata format preferably includes a four character message acronym followed by an error code. A successful request (or a request acknowledgment) generates a response with an error code of "0". Additional data specific to the response follows this error code. If any server receives a message which is not known, the response message will echo the message acronym back along with an appropriate error code.

Appendix A provides a series of tables containing the content for each metadata message request that can be sent by the report requestor 212 for each of the enumerated user requests, in addition to the content of the corresponding metadata message responses by the RM server 250. As an example, when a user requests a list of all standard report templates that can be created for a specified product, category, and product type, e.g., toll free unpriced data, an example metadata format is as follows:

-67-

GRTL<PRODUCT=V, DATATYPE=R, DATACAT=P, IO=O>

where GRTL is the message name, the PRODUCT indicates the product type, e.g., V=Vnet, C=CVNS, S=Vision, T= toll free, F= Traffic view, etc. DATATYPE indicates the data type, e.g. R=reports, D=call detail, etc., and DATACAT represents the report category, e.g., P=priced, U=unpriced.

In the hereinafter described manner, the GRTL message is received by the StarWRS proxy server application 250' to enable the RM server 250 to perform the query into the RM Informix database having the data associated with the request. Specifically, after selecting the Report Requester from the browser or the Toolbar, a WRSApp object is launched. At its creation, the WRSApp object creates a DataManager object to guide the data and which initiates a CommunicationManager object to manage all communication between the client and the server. The CommunicationManager utilizes a RptManagerMsg object to create: 1) a GRTL; 2) a WRSCommWrapper for direct communication with the backend; and, 3) a WRSReportManagerUtilParser to format the data returned. In response, the Report Manager creates a Dispatcher object, which contains the business logic for handling metadata messages at the back-end and utilizes the services of a RMParser class. Upon determining that the client has sent a valid message, the appropriate member function is invoked to service the request. Upon receiving the message, the Report Manager creates the Parser object (RMParser) which takes the message apart and invokes a validation object which validates the message.

-68-

5

10

15

20

25

In response to the GRTL message, the data returned by the Report Manager server 250 for this particular request may include the following data in metadata format as follows:

5

10

SRTL<ERROR=0, REPORTS = <RptCategoryDescription1
=<RptTitle1.1, RptTemplateID1.1, RptCategoryType1.1>,
<RptTitle1.2, RptTemplateID1.2, RptCategoryType1.2>>,
<RptCategoryDescription2 =<RptTitle2.1, RptTemplateID2.1,
RptCategoryType2.1>, <RptTitle2.2, RptTemplateID2.2,
RptCategoryType2.2>>, ...
<RptCategoryType2.2>>, ...
<RptCategoryDescription#n=<RptTitle#n.n,
RptTemplateID#n.n, RptCategoryType#n.n>, <RptTitle#n.n,
RptTemplateID#n.n, RptCategoryType#n.n>>>

15

20

wherein RptID# indicates a standard report template ID, RptTitle# indicates the standard report template title, RptCategory# indicates the report category, e.g.
Monitor Usage, Analysis Traffic, Historical, Executive Summary, Call Detail, etc.; and, RptDescript indicates the standard report template description displayed to the user. Thus, for each Report Template Category, there will be the list of reports with each entry containing a Report Template Title, a Report Template Description and the Report Template ID.

25

30

The SRTL message is sent from the StarWRS RM proxy server to the report requestor for presentation to the customer. Specifically, the SRTL response is built inside the esql wrapper function after obtaining the necessary information through the stored procedure from the Report Manager Informix database. The Report Manager creates the RMServerSocket object and sends the SRTL message back to the client.

To retrieve details of the standard report template, the GRTD request message request is sent having content shown in the table in Appendix A. When specified, the Report ID field indicates an existing report that a user may wish to edit.

The SRTD response generated by the RM server is formatted in metadata as follows:

< Report Template ID=ID#,

NODE1=<node level1, label value1, assigned unique screen identification1, >,

NODE2=<node level2, label value2, assigned unique screen identification2, <control ID2.1, field value2.1, data location2.1>, <control ID2.2, field value2.2, data location2.2>, <...,..>>,

NODE#n=<node level#n, label value#n, assigned unique screen identification#n, <control ID#n.1, field value#n.1, data location#n.1>, <control ID#n.2, field value#n.2, data location#n.2>>

In the SRTD message, the MetaTreeData Label fields include such values as General, Report Name, Report Description, Scheduled Execution, etc. The MetaCtrlInfo MetaField Value fields may be blank or may contain the selection options available to the user. This information is taken from the report template database.

As another example, when a report request is submitted to retrieve a full list of user created reports from a user report table, i.e., a template list

5

15

20

25

for a particular report product, category, and type, the example metadata format is as follows:

GURL<USERID=jeanvnet2,RPTTMPID=1,ENTPID=00022924,PRODUCT=T
,DATACAT=U>

with UserID and ReportTemplateID fields specified. Specifically, this process entails invoking the Communication Manager object to communicate with the RM server in order to obtain a SURL metadata message. The CommunicationManager utilizes the RptManagerMsg object to create: 1) a GURL, 2) a WRSCommWrapper for direct communication with the backend, and, 3) a WRSReportManagerUtilParser to format the data returned. The parser returns a hash table containing the User Report List. At the RM server, the Report Manager creates an Dispatcher object that contains the business logic for handling metadata messages at the back-end and utilizes the services of the RMParser class. determining that the client has sent a valid message, the appropriate member function is invoked to service the request. The Report Manager, upon receiving a message, creates a Parser object (RMParser) which takes the message apart and invokes a validation object which validates the message.

In response to the GURL request, the data returned is taken from a user report table in the RM server database. The generic SURL message in Metadata format returned by the RM server 250 includes the following information:

5

10

15

20

25

REPORTS = <UserRptCategory1 = <UserRptTitle1,
UserRptID1, activeflag, report type, statusdate
>>, <UserRptCategory2 = <UserRptTitle2,
UserRptID2, activeflag, report type,
statusdate>>,... <UserRptCategory#n =
<UserRptTitle#n, UserRptID#n, activeflag, report
type, statusdate>>>

wherein for each user report category, there is a list of reports where each entry contains a UserRptID# indicating a user-defined report template ID, a UserRptTitle# indicating the user's report template title, and a UserRptCategory# indicating the user report category. Specifically, the SURL response is built inside an esql wrapper function after obtaining the necessary information through a stored procedure from the Informix database. The Report Manager creates the RMServerSocket object and sends the SURL message back to the client.

To retrieve the details of a specific user's report, the GURD message is sent having data as contained in the table shown in Appendix A. Specifically, when the user selects a report from the Inventory List on the Report Requestor, a Communication Manager object is invoked to communicate with the RM server in order to obtain a SURD metadata message. The CommunicationManager object first utilizes the RptManagerMsg object to create: 1) a GURD metadata message, 2) a WRSCommWrapper for direct communication with the backend, and 3) the RSReportManagerUtilParser to format the data returned. The parser organizes the data into a series of nodes which are utilized to

5

10

15

20

25

create the report builder tree on the report requestor customization screen. Later this data will be extracted from the node and used to construct the screen related to the node. The Report Manager server creates the MCIDispatcher object which contains the business logic for handling metadata messages at the back-end and utilizes the services of the RMParser class. Upon determining that the client has sent a valid message, the appropriate member function is invoked to service the request. The Report Manager, upon receiving a message, creates the Parser object (RMParser) which takes the message apart, invokes a validation object which validates the message and builds a response inside the esql wrapper function after obtaining the necessary information through the stored procedure from the Informix database. The Report Manager creates the RMServerSocket object and sends the SURD/SRTD message back to the client. The responsive SURD metadata message corresponding to a retrieve user report detail (GURD) request has the following metadata syntax:

< Report Template ID=ID#,

NODE1=<node levell, label value1, assigned unique screen identification1, >,

NODE2=<node level2, label value2, assigned unique screen identification2, <control ID2.1, field value2.1, data location2.1>, <control ID2.2, field value2.2, data location2.2>, <...,..>>,

5

10

15

20

25

NODE#n=<node level#n, label value#n, assigned unique screen identification#n, <control ID#n.1, field value#n.1, data location#n.1>, <control ID#n.2, field value#n.2, data location#n.2>, <...,..>>,

5

10

15

20

This response thus may include the report information having detailed items including: UserReportID (UserID), User's report name (UserName), product (UserProd), Threshold (UserThreshold), User Report Description (UserDescript), Report Columns (UserFields), Report column headings (UserHeaders), and, in addition, customization options with fields indicating, inter alia, columns to display (UserHeaders), user-defined criteria (UserCriteria), a sort order (UserOrder) and scheduling selections (UserSched), the last update of this report (UserLastUpdate) and, the Report status (if adhoc) (UserStatus), etc.

If a request is made to add a user-created report to a User_report table maintained by the RM Server 250 and the RS server 260, the ARD metadata message having fields defined in the table provided in Appendix A is processed by the RM server 250, as indicated at step 628, Figure 13(a). An example message in metadata format to initiate the addition of a user-created report for ODS (Inbound/Outbound) reporting data is as follows:

30

25

ARD<USERID=jeanvnet2,ENTPID=00022924,STDRPTID=90,
NAME=City Summary
Outbound,PRODUCT=S,CATEGORY=Analyze Traffic,

Outbound, PRODUCT=S, CATEGORY=ANALYZE TIATTIC,
THRESHOLD=<RECCOUNT=20>, SCHEDULE=A<START=19980602

0000, END=199807151200>, RANGETYPE=1, SCHEDTYPE=A, TI MEZONE=45, BILLING=INBOUND<<90000003,90000003><NA,

NA><NA, NA>>INBOUND<<90000004,90000004><NA, NA><NA, NA><NA, NA>>, CARDNO=<654654*~5465465465465465>, IDAC=<46546546*~1246>, GEO=GEO<<001,001
 USA/WORLDZONE1><NA, NA><NA, NA><NA, NA><NA, NA><NA, NA><NA, NA><NA, NA>>, OACC
 ESS=<4*-1>, ODISTRANGE=<A*-F>, OUSAGE=<5*-4>, SORTBY=<5
 4D>, DESCRIPTION=This report summarizes call
 detail by the terminating city and state (USA) /
 province (CA). The report is based on the
 date/time ranges and report criteria
 selected., COLUMNS=<54*-55*-67*-62*-36*-61*-58*-63*-64*-66*65>, ACTIVE=1, TOTALMODE=0, EMAIL=0, PAGE=0,
 LANG=1234, CURR=2345>

15

20

25

30

5

10

In this example, the "NAME" field refers to the Report Name (e.g., city summary); the "PRODUCT" field refers to the report product (Vision); the "THRESHOLD" field refers to the record count; the "DESCRIPTION" field refers to the report description; the "COLUMNS" refers to the number of columns specified for a report by the user; the "BILLING" field refers to the specified report billing entitlement, i.e., billing hierarchy; the "IACCESS" field refers to the inbound access type and the "OACCESS" refers to the outbound access; the "SORTBY" field indicates the report column sorting customization with "A" indicating column(s) having data to be sorted in ascending order and, "D" indicating column(s) having data to be sorted in descending order; the "SCHEDULE" field referring to the scheduling type, e.g., with "A" indicating an ad-hoc report, and the user specified date range

on which to report as indicated by the "START" and "END" fields, and additionally, the scheduling frequency information in the case of a recurring report; the SUBTOTALCOLUMNS field, referring to the report columns having data to be subtotaled; and, the "EMAIL" and "PAGE" fields indicating reporting notification via e-mail or paging, respectively.

Furthermore, for each of the metadata messages in Appendix A, including the Delete Report Definition (DRD), copy report definition (CRD), and update report scheduling (URS) messages, the report manager server 250 responds to the Report Requestor with the processing results. In the case of a copy report, a new User Report ID is assigned and returned by RM. When editing an existing StarODS (priced call data) report, the user may make changes to the Report Title, the Report Description, the Report scheduling, the 800 numbers and thresholds, and may customize number of rows, report columns, access codes, access types, billing location, geographic location, paging notification, and e-mail notification. More specifically, when the user selects a report from the inventory list or a new report, an WRSEdit Screen is launched to provide the editing capabilities which are available for the report format. WRSedit guides the screens through the process of retrieving the screens' data. Some of the screens need data which has not yet been retrieved, such as 800 numbers or geographic locations. These screens manage the requests to the DataManager object to create the get pick list (GPL) message (Appendix A), which launches the CommunicationManager object to perform

5

10

15

20

25

this task. The CommunicationManager utilizes the RptManagerMsg object to create the GPL, the WRSCommWrapper for direct communication with the backend, and the WRSReportManagerUtilParser to format the data returned. In response, the Report Manager server creates the MCIDispatcher object and invokes the MCIRMParser class. Upon determining that the client has sent a valid message, the appropriate member function is invoked to service the request. The Report Manager, upon receiving a message, creates the Parser object (RMParser) which takes the message apart and a validation object is invoked which validates the message. The response is built inside the esql wrapper function after obtaining the necessary information through the stored procedure from the Informix database. Report Manager creates the RMServerSocket object and sends the GPLA message back to the client.

Having described the functionality of selecting and/or generating a report and customizing it, reference is now had to the process for running the report request in StarODS.

Particularly, in the preferred embodiment, the user may select a save and exit report option, or a save and run report option. In either scenario, an WRSEdit object enables a WRSScnMgr object to save the report to the RM server. The WRSScnMgr object launches each screens save method which communicates with the DataManager object to place the screens data in its corresponding WRSNode.

Once all of the WRSNode objects have been updated, the WRSScnMgr object calls the DataManager object's

A Commence of the State of the

5

10

15

20

25

SaveReport method to build a hash table to contain all of the report's data. The CommunicationManager utilizes the RptManagerMsg object to create the ARD metadata message from the hash table, the WRSCommWrapper for direct communication with the backend, and the WRSReportManagerUtilParser to handle any errors thrown by the server. The Report Manager creates the Dispatcher object, and utilizes the services of the RMParser class and validation objects. Upon determining that the client has sent a valid message, the appropriate member function is invoked to service the request. The response is built inside the esql wrapper function after obtaining the necessary information through the stored procedure from the RM database. The Report Manager creates the RMServerSocket object and sends the ARDA message back to the client.

As illustrated in Figure 13(a), at step 630, in reference to user selection of a Save and Run report option, the report is marked as scheduled and saved in a user_table in the Report Scheduler server 260 via the Report Manager. Subsequently, as indicated at step 630, the Report Scheduler server 260 generates an ARD message (Appendix D) and sends the ARD message to StarODS DSS server for which the DSS has a predefined interface, as described herein.

Next, as indicated at step 632, the DSS receives the request and acknowledges receipt. Specifically, when the request is received it is first validated with StarOE to ensure that the user is entitled to receive information about the selected product corp and number(s). Once the

5

10

15

20

25

request passes validation, the DSS IAIO reads the header to determine which Data Mart will ultimately be queried. It then parses the metadata into a format which the COTS software can readily convert into a SQL statement, as indicated at step 635, Figure 13(b), and adds the report to the DSS report queue based upon type (Daily, Weekly, Monthly, Adhoc) and associated DataMart, as indicated at step 638. It should be understood that at this point, the request has been flagged as submitted in the RM database, as indicated at step 633.

From this point forward, DSS activity is controlled by a control process and progress or errors are logged internally in the DSS system. This control process includes logic enabling the prioritization of report requests and application of rules defining the order in which they should be executed. Thus, at the appropriate time, depending on the type or report, reporting period and other parameters, the Information Advantage query engine selects the report from the queue, as indicated at step 640, which action is logged in the report status table (Appendix I) as indicated at step 642. The SQL statement is then built by Decision Suite $^{ extsf{ imes}}$ and routed to the appropriate data mart for execution in the manner as described herein, as indicated at step 643. The query engine generates the SQL statement from the metadata and executes the report which action is logged in the report status table as indicated at step 645. indicated at step 648, the query results are

5

10

15

20

25

returned, and, a post-SQL formatting process is invoked.

More particularly, as shown in Figure 12(b), a Formatter module 395 may perform various report result transformations including: 1) 5 Converting of column headers generated by Information Advantage into appropriate column ids that are recognizable to the StarWRS client viewer functionality (as indicated at step 650, Figure 13(b)); 2) Provide subtotaling for specific 10 requested "subtotal by" columns in the format required by the StarWRS client interface (as indicated at step 653, (Figure 13(b)) and provides report-based totals as requested by customer; 3) converting binary stream data file to ASCII text 15 file (as indicated at step 655, Figure 13(c)); 4) implementing Replace logic, e.g., replacement of "TAB" delimiters with appropriate "Comma" field delimiters (as indicated at step 657 Figure 13(c)); 5) implementing Repeat/Padding logic, i.e., 20 identifying compressed columns/values and decompressing (or repeating) the values that were compressed; 6) providing alphanumeric translations for any encoded data elements returned in the result set data file (as indicated at step 659, 25 Figure 13(c)); and, 7) adding new computed/derived columns, e.g., percents, averages of column data values, etc., as requested by customers on specific reports.

Particularly, as shown in Figure 12(b), the Formatter process 395 reads the *.hdr files and *.data files from the Decision Suite™ result set to

obtain respective column names and report data. Particularly, the formatter process for converting Column Headers from Information Advantage® column header names to column ids implements a lookup of column ids in a column_id's table, shown in Appendix I, based on column header names.

Then, the formatter process reads the request table 390 for total/subtotal, threshold, etc. information associated with the current report request and determines any other formatting features to be enabled for a particular result set. As shown in the example Request Table of Appendix I, parameters passed to the formatter module indicate any report request specific details that are required by the Formatter. For example, for report totals, a "total_mode" variable is used to indicate if report totals and/or sub-totals should Particularly, Column IDs be included. representing the data columns upon which subtotaling is based are passed as parameters to the Formatter process 395 and are referred to as "Break Columns". At appropriate changes in values for these break columns, the formatter generates a subtotal line for subtotaling the applicable additive facts including, for example, Call Amount, Call Duration, and Call Count.

Furthermore, the formatter reads a Column id table 396 (detailed in Appendix I) to determine data types and if any data translations are needed.

As computed/derived columns may be included or excluded from customer report requests, the Formatter process 395 for calculating new computed/derived columns on specific customer-

5

10

15

20

25

requested reports are provided on a report request basis. Example types of derived columns include: 1) Percents, e.g., based on the additive data facts pertinent to the report request and are typically based on report totals and row amounts for Call Amount, Call duration, and Call Count; 2) Row-wise derived data elements as requested, which represent data elements computed based on original additive data elements on a row by row basis (i.e., column x/column y for each row in the result data file) and typically include average calculations such as Average # of Minutes per Call, Average Amount per Call, and Average Amount per Minute. Appendix I illustrates a derived column "percent" calculation indicated in the Column ID table showing an equation for calculating a value of a particular value (C36) divided by a column total (CT36) \times 100.

The Formatter process 395 may additionally perform alphanumeric translations for any encoded data elements returned in the result set data file by implementing appropriate lookup in a Translation table 397, such as the example Translation Table provided in Appendix I, and replacing the code.

Referring back to Figure 13(c), after. formatting the report, as indicated at step 660, a message is sent to the control process to update the request status table 391. It should be understood that, if a failure occurs during formatting, the error log is updated and a status message sent to the request status table 391, as well. Then, as indicated at step 665 (Figure 13(c)), the formatter 395 creates a *.csv (Comma

5

10

15

20

25

Separated Value) or .txt file, gives the file a unique name and saves the file. Preferably, a *.csv is the file generated if the report is successfully generated. As indicated at step 668, the *.csv report/data file is then "pushed", implementing FTP, to the StarODS server's directory on the Inbox server 270. The StarODS server 400 is responsible for generating unique file names within their directory on the Inbox server 270. For example, the following directory and file naming conventions used for reports generated by the StarODS server are labeled inbox\files\ods with text files having the suffix *.txt or *.txt_zip (compressed), and comma separated files having a suffix *.csv or *.csv_zip (compressed).

Finally, as indicated at step 670, once the file has been successfully transferred to the Priced reporting directory on the Inbox server, and the request status table 391 appropriately updated at step 675, the NRL process (Figure 11(b)) generates and transmits an NRL message to the RM Server 250 notifying it of the report file name and location in the Inbox, requestor information, and if the transfer was successful. This is accomplished by using a "NRL" metadata message.

Appendix B provides a table comprising the Notify Report Location parameters used for the NRL Metadata messaging sent by StarODS fulfilling server to the RM Server 250 when a requested report is complete. An example NRL message sent from the ODS server 400 to the RM server 250 is as follows:

NRL<TYPE=Sim-Msg-40,ENTPID=00022924,USERID=dorod,

5

10

15

20

25

WO 99/16207

STDRPTID=40, USERRPTID=3415, REQUESTID=20341, COMPRESS=0, LOC=/inbox/files/testODS/STDRPTID43TM_082598_084920.
CSV,FSIZE=389, PRESORTED=0>

An NRLA response is sent back to the DSS as shown in Appendix B.

Once the RM server 250 has received the NRL message from the fulfilling server, it verifies the file's presence and builds a metadata file, e.g., by compressing the appropriate metadata (for displaying the report) into a .MTD file. This .MTD file is utilized by the Report Viewer to know how to display the report. The Report Manager server creates a file including the metadata using the same file name as the report/data file, but having the following suffix: *.mtd or *.mtd_zip indicating a metadata or compressed metadata file, respectively.

Appendix F details the parameters that are passed in the GET METADATA messaging for indicating to the Report Viewer how to display a requested report. For example, a GET METADATA message corresponding to an Priced TVS fulfilling server report is as follows:

25

20

10

15

<METADATA=<CRITERIA=<Name=UsageSummary292^ADescriptio
n= This report summarizes calls based on call type.^A
Report_Level=<INBOUND<<90000001,90000001><NA,NA><NA,N
A>>

INBOUND<<90000002,90000002><,><,>>>^AOptions=^ASchedu ling_Information=^AOne_Time=^ADates=<06/01/199800:00/ ~07/01/199800:00,>^ATimezone=EST,Lang=1234,Curr=2345>

	DEFAULT_GRAPH_MODE=0^ADEFAULT_GRAPH_TYPE=0^ADEFINE_X_AXIS=0
	^AX_AXIS_COLUMN=
	COLUMN_DISPLAY_ORDER=<105^A114^A67^A62^A36^A61^A58^A6
	3^A64^A66^A65>^ASORT_ALLOWED=1^APRESORTED=0^A
5	PRESUBTOTALED=1^ATOTALMODE=0^ASORT_COLUMN S=<105A>^A
	SUBTOTAL_COLUMNS=<>^ASELECTED_SECTION=0^A
	METACOLUMN= <meta_column_id=105^a< td=""></meta_column_id=105^a<>
	COLUMN_LABEL=Usage
	Description^ADATATYPE=S^ADECIMAL=0^A
10	HIDEABLE=1^AGRAPHABLE=0^AWIDTH=20^ACALCULATE=0^A
	CALCULATE_EXPRESSION=>^AMETACOLUMN= <meta_column_id=11< td=""></meta_column_id=11<>
	4^A
	COLUMN_LABEL=Range/DistanceDescription^ADATATYPE=S^AD
	ECIMAL=0^AHIDEABLE=1^AGRAPHABLE=0^AWIDTH=20^ACALCULAT
15	E=0^A
	CALCULATE_EXPRESSION=>^AMETACOLUMN= <meta_column_id=67< td=""></meta_column_id=67<>
	^A
	COLUMN_LABEL=Calls^ADATATYPE=I^ADECIMAL=0^AHIDEABLE=1
	AA
20	GRAPHABLE=1^AWIDTH=7^ACALCULATE=0^ACALCULATE_EXPRESSI
	ON=> ^AMETACOLUMN= <meta_column_id=62^acolumn_label=%< td=""></meta_column_id=62^acolumn_label=%<>
	AMETACOLOMN= <meta_colomn_id=82 acolomn_b="" bbbb<="" td=""></meta_colomn_id=82>
	DATATYPE=N^ADECIMAL=1^AHIDEABLE=1^AGRAPHABLE=1^AWIDTH
25	=7^A
23	CALCULATE=0^ACALCULATE_EXPRESSION=>^A
	METACOLUMN= <meta_column_id=36^acolumn_label=minutes^a< td=""></meta_column_id=36^acolumn_label=minutes^a<>
	DATATYPE=N^ADECIMAL=1^AHIDEABLE=1^AGRAPHABLE=1^AWIDTH
	=8^A
30	CALCULATE=0^ACALCULATE_EXPRESSION=>^A
50	METACOLUMN= <meta_column_id=61^acolumn_label=% min^a<="" td=""></meta_column_id=61^acolumn_label=%>
	DATATYPE=N^ADECIMAL=1^AHIDEABLE=1^AGRAPHABLE=1^A
	WIDTH=5^ACALCULATE=0^ACALCULATE_EXPRESSION=>^A
	MIDITI-0VCUTCOTUIT Ottottpcomitt programme

METACOLUMN=<META_COLUMN_ID=58^ACOLUMN_LABEL=Amount^AD ATATYPE=C^ADECIMAL=2^AHIDEABLE=1^A GRAPHABLE=1^AWIDTH=7^ACALCULATE=0^ACALCULATE_EXPRESSI ON=> ^AMETACOLUMN=<META_COLUMN_ID=63^ACOLUMN_LABEL=% Amt^A 5 DATATYPE=N^ADECIMAL=1^AHIDEABLE=1^AGRAPHABLE=1^AWIDTH =5^A CALCULATE=0^ACALCULATE_EXPRESSION=>^A METACOLUMN=<META_COLUMN_ID=64^ACOLUMN_LABEL=Avg Min/Call 10 ^ADATATYPE=N^ADECIMAL=2^AHIDEABLE=1^AGRAPHABLE=1^A WIDTH=12^ACALCULATE=0^ACALCULATE_EXPRESSION=>^A METACOLUMN=<META_COLUMN_ID=66^ACOLUMN_LABEL=Avg Amt/Call^A DATATYPE=N^ADECIMAL=2^AHIDEABLE=1^AGRAPHABLE=1^AWIDTH 15 ^A CALCULATE=0^ACALCULATE_EXPRESSION=>^A METACOLUMN=<META_COLUMN_ID=65^ACOLUMN_LABEL=Avg Amt/Min^A DATATYPE=N^ADECIMAL=2^AHIDEABLE=1^AGRAPHABLE=1^A 20 WIDTH=11^ACALCULATE=0^ACALCULATE_EXPRESSION=>>> *<METADATA= <CRITERIA= <Name=My Report, Total=Totals are located at the bottom of the report., Description=My report description, Number_Dialed=<800#1, 800#2, 800#n>, 25 Scheduling_Information= Recurring, Dates= Monthly>> DEFAULT_GRAPH_MODE=1, DEFAULT_GRAPH_TYPE=1, DEFINE_X_AXIS=1, X_AXIS_COLUMN=2, DEFAULT_Y_COLUMNS=<5,6>, COLUMN_DISPLAY_ORDER=<1,2,3,4,5,6>, 30 COLUMN_STORED_ORDER=<4,3,2,5,6,1>, SORT_ALLOWED=1, PRESORTED = 1, TOTALMODE=3, SUBTOTCOL=<5,6>, SELECTED SECTION=1, METACOLUMN=<META_COLUMN_ID=1, COLUMN_LABEL=name,

DATATYPE=S, DECIMAL=0, HIDEABLE=1, GRAPHABLE=0, WIDTH=10, CALCULATE=1, CALCULATE_EXPRESSION=<4 / 7>>>>

5

10

Once the metadata file corresponding to the requested report is build by the Report Manager, the RM ftp's the .MTD file to the Inbox server. The RM server additionally updates a User_report table status field with a status "C" indicating completion.

Once the Report Manager has updated the status field, the RM server 250 then adds the report to the user's Inbox.

15

20

Appendix C provides a table showing the fields for the metadata messaging between the RM server 250 and the Inbox server 270 for adding an item into the StarWRS system Inbox server 270, and the respective acknowledgment message format back from the Inbox server. In the "A" message found in Appendix C, the "LOC" field includes information about where the report data is located. For example, a metadata message indicating to the Inbox server that a priced ODS server report is available is shown as:

25

A<CATEGORY=R, TYPE=traffic, REQUESTID=32197, USER ID=LynneLevy2, RPTID=150, PRIORITY=, COMPRESS=0, U NOTIFY=0, MMADDR=, MMTEXT=, PGT=, PGPIN=, PGTXT=, RP TCATEGORY=Service Location & Hour, LOC=/inbox/files/ods/902512294STDRPTID10.CSV, E NTPID=10324488, RQSTDT=1998-01-02

WO 99/16207

15:18,FSIZE=3705,RPTTITLE=Summary by Service Location and Hour,MSIZE=3322>

Particularly, the RM server supplies a metadata "A" message to the Inbox indicating the 5 FTP file location. Via the report viewer, the report is now available for viewing, downloading, saving, or printing by the user. Particularly, as shown in the exemplary nMCI home page in Figure 4, the nMCI Interact Message Center icon 77 may be 10 selected which will cause the display of a web page including the message center dialog window. the message center dialog windoe, a user may select from among three tabs, one of which, a reports tab, enables the retrieval of both a data file and a 15 metadata file from the Inbox Server corresponding to those reports that have been run and available for customer viewing. Information provided for display by the message center display 325 is provided by the User_table which keeps track of the 20 status of all reports for a particular user. By double-clicking a chosen report, a report viewer application is enabled to display the chosen report on a web-page. To view the report the user selects the report and, the report metadata and the 25 appropriate viewer are uploaded to the user (client) workstation.

As mentioned herein with respect to Figure 3, the messages created by the client Java software are transmitted to the StarWeb (DMZ) Server 44 over HTTPS. For incoming (client-to-server) communications, the DMZ Web servers 44 decrypt a request, authenticate and

verify the session information. The logical message format from the client to the Web server is shown as follows:

5 || TCP/IP || encryption || http || web header || dispatcher header || proxy-specific data ||

where "||" separates a logical protocol level, and protocols nested from left to right. Figure 14 illustrates a specific message sent from the client browser to the desired middle tier server for the particular application. As shown in Figure 14, the client message 340 includes an SSL encryption header 342 and a network-level protocol HTTP/POST header 344 which are decrypted by the DMZ StarWeb Server(s) 44 to access the underlying message; a DMZ Web header 346 which is used to generate a cookie 341 and transaction type identifier 343 for managing the client/server session; a dispatcher header 345 which includes the target proxy identifier 350 associated with the particular type of transaction requested; proxy specific data 355 including the application specific metadata utilized by the target proxy to form the particular messages for the particular middle tier server providing a service; and, the network-level HTTP/POST trailer 361 and encryption trailer 366 which are also decrypted by the DMZ Web server laver 44.

After establishing that the request has come from a valid user and mapping the request to its associated session, the request is then forwarded through the firewall 55b over a socket

10

15

20

connection 33 to one or more decode/dispatch servers 46 located within the corporate Intranet 60. The messaging sent to the Dispatcher will include the user identifier and session information, the target proxy identifier, and the proxy specific data. The decode/dispatch server 46 authenticates the user's access to the desired middle-tier service.

As shown in Figure 14, the StarWeb server forwards the Dispatcher header and proxy-specific 10 data to the Dispatcher, "enriched" with the identity of the user (and any other session-related information) as provided by the session data/cookie mapping, the target proxy identifier and the proxy-The dispatch server 46 receives the specific data. 15 requests forwarded by the Web server(s) 44 and dispatches them to the appropriate application server proxies. Particularly, as explained generally above with respect to Figure 7, the dispatch server 46 receives request messages 20 forwarded by the DMZ Web servers and dispatches them to the appropriate server proxies. message wrappers are examined, revealing the user and the target middle-tier service for the request. A first-level validation is performed, making sure 25 that the user is entitled to communicate with the desired service. The user's entitlements in this regard are fetched by the dispatch server from Order Entry server 280 at logon time and cached. Assuming that the Requestor is authorized to 30 communicate with the target service, the message is then forwarded to the desired service's proxy, which, in the accordance with the principles

described herein, comprises: 1) a report manager proxy 250' corresponding to the RM Server 250, 2) a report scheduler proxy 260' corresponding to the RS Server 260, and 3) an inbox server proxy 270' corresponding to the Inbox Server 270. Each of these proxy processes further performs: a validation process for examining incoming requests and confirming that they include validly formatted messages for the service with acceptable parameters; a translation process for translating a message into an underlying message or networking protocol; and, a management process for managing the communication of the specific customer request with the middle-tier server to actually get the request serviced. Data returned from the middletier server is translated back to client format, if necessary, and returned to the dispatch server as a response to the request.

Figures 15(a) and 15(b) are schematic illustrations showing the message format passed between the Dispatcher 46 and the application specific proxy (Figure 15(a)) and the message format passed between the application specific proxy back to the Dispatcher 46 (Figure 15(b)). As shown in Figure 15(a), all messages between the Dispatcher and the Proxies, in both directions, begin with a common header 110 to allow leverage of common code for processing the messages. A first portion of the header includes the protocol version 115 which may comprise a byte of data for identifying version control for the protocol, i.e., the message format itself, and is intended to prevent undesired mismatches in versions of the

5

10

15

20

25

dispatcher and proxies. The next portion includes the message length 120 which, preferably, is a 32bit integer providing the total length of the message including all headers. Next is the echo/ping flag portion 122 that is intended to support a connectivity test for the dispatcherproxy connection. For example, when this flag is non-zero, the proxy immediately replies with an echo of the supplied header. There should be no attempt to connect to processes outside the proxy, e.g. the back-end application services. portion indicates the Session key 125 which is the unique session key or "cookie" provided by the Web browser and used to uniquely identify the session at the browser. As described above, since the communications middleware is capable of supporting four types of transport mechanisms, the next portion of the common protocol header indicates the message type/mechanism 130 which may be one of four values indicating one of the following four message mechanisms and types: 1) Synchronous transaction, e.g., a binary 0; 2) Asynchronous request, e.g., a binary 1; 3) Asynchronous poll/reply, e.g., a binary 2; 4) bulk transfer, e.g., a binary 3. Additionally, the common protocol header section includes an indication of dispatcherassigned serial number 135 that is unique across all dispatcher processes and needs to be coordinated across processes (like the Web cookie (see above)), and, further, is used to allow for failover and process migration and enable multiplexing control between the proxies and dispatcher, if desired. A field 140 indicates the

5

10

15

20

25

status is unused in the request header but is used in the response header to indicate the success or failure of the requested transaction. More complete error data will be included in the specific error message returned. The status field 140 is included to maintain consistency between requests and replies. As shown in Figure 16(a), the proxy specific messages 375 are the metadata message requests from the report requestor client and can be transmitted via synchronous, asynchronous or bulk transfer mechanisms. Likewise, the proxy specific responses are metadata response messages 380 again, capable of being transmitted via a synch or bulk transfer transport mechanism.

It should be understood that the application server proxies can either reside on the dispatch server 46 itself, or, preferably, can be resident on the middle-tier application server, i.e., the dispatcher front end code can locate proxies resident on other servers.

As mentioned, the proxy validation process includes parsing incoming requests, analyzing them, and confirming that they include validly formatted messages for the service with acceptable parameters. If necessary, the message is translated into an underlying message or networking protocol. A list of Report Manager and Inbox proxy error messages can be found in Appendix E. If no errors are found, the proxy then manages the communication with the middle-tier server to actually get the request serviced. The application proxy supports application specific translation and

5

10

15

20

25

PCT/US98/20148 WO 99/16207

communication with the back-end application server for both the Web Server (java applet originated) messages and application server messages.

Particularly, in performing the verification, translation and communication functions, the Report Manager server, the Report Scheduler server and Inbox server proxies each employ front end proxy C++ objects and components. For instance, a utils.c program and a C++ components library, is provided for implementing general functions/objects. Various C++ parser objects are invoked which are part of an object class used as a repository for the RM metadata and parses the string it receives. The class has a build member function which reads the string which contains the data to store. After a message is received, the parser object is created in the RMDispatcher.c object which is file containing the business logic for handling metadata messages at the back-end. It uses the services of an RMParser 20 class. Upon determining that the client has sent a valid message, the appropriate member function is invoked to service the request. Invocation occurs in MCIRMServerSocket.C when an incoming message is received and is determined not to be a talarian 25 message. RMSErverSocket.c is a class implementing the message management feature in the Report Manager server. Public inheritance is from MCIServerSocket in order to create a specific instance of this object. This object is created in 30 the main loop and is called when a message needs to be sent and received; a Socket.c class implementing

5

10

client type sockets under Unix using, e.g., TCP/IP or TCP/UDP. Socket.C is inherited by ClientSocket.C:: Socket(theSocketType, thePortNum) and ServerSocket.C:: Socket(theSocketType, thePortNum) when ClientSocket or ServerSocket is 5 created. A ServerSocket.c class implements client type sockets under Unix using either TCP/IP or TCP/UDP. ServerSocket.C is inherited by RMServerSocket when RMServerSocket is created. InboxParser.c class used as a repository for the RM 10 The class' "build" member function reads the string which contains the data to store and the class parses the string it receives. After a message has been received, the MCIInboxParser object is created in inboxutl.c which is a file 1.5 containing the functions which process the Inbox requests, i.e, Delete, List, Fetch and Update (Appendix G). Additional objects/classes include: Environ.c which provides access to a UNIX environment; Process.c which provides a mechanism 20 to spawn slave processes in the UNIX environment; Daemon.c for enabling a process to become a daemon; Exception.c for exception handling in C++ programs; and, RMlog.c for facilitating RM logging. In addition custom ESQL code for RM/database interface 25 is provided which includes the ESQC C interface (Informix) stored procedures for performing the ARD, DRD, DUR, URS, GRD, CRD, and GPL messages. The functions call the stored procedures according to the message, and the response is build inside 30 the functions depending on the returned values of

the stored procedures. A mainsql.c program provides the ESQL C interface for messages from the report manager and report viewer.

A list of Report Manager and Inbox proxy error messages can be found in Appendix E.

Outgoing (server-to-client)

communications follow the reverse route, i.e., the proxies will feed responses to the decode/dispatch server, which will encrypt the client-bound messages and communicate them to the DMZ Web servers over the socket connection. The Web servers will forward the information to the client using SSL. The logical message format returned to the client from the middle tier service is shown as follows:

|| TCP/IP || encryption || http || web response || dispatcher response || proxy-specific response ||

where || separates a logical protocol level, and protocols nested from left to right. The foregoing merely illustrates the principles of the present invention. Those skilled in the art will be able to devise various modifications, which although not explicitly described or shown herein, embody the principles of the invention and are thus within its spirit and scope.

5

10

APPENDIX A

Retrieve Report Template List

Messagea	Parameter Name	Parameter Type	- Required	Acceptable Value
GRTL	Request	Char (4)	Yes	
PRODUCT=	Product ID	Char (1)	Yes	V, C, S, T, H
DATATYPE=	Data Type	Char (1)	Yes	R = Reports, D = Call Detail A = All data types
DATACAT=	Data Category	Char (1)	Yes	P = Priced, U = Unpriced
IO=	Inbound/Outbo und	Char (1)	Yes	I = Inbound, O = Outbound B = Both

Send Report Template List

Message/	Parameter: - Name-	Parameter Type	Require	dAcceptable Value
SRTL	Response	Char (4)	Yes	Control of the State of the Sta
ERROR=	Error Code	Char (4)	Yes	0 or error
REPORTS=	Data	Char	No	See below formatting

Get Report Template Detail

Message	Parameter. Name⊯	Parameter ∵Type ⊭	Required	Acceptables Value
GRTD	Request	Char (4)	Yes	
REPORTID=	Standard Report ID	Char (10)	Yes	Report ID (i.e., 2, 44)

Send Report Template Detail

	S Parameter Name⊚	-Parameter Type=	Require	d: Acceptable Value
SRTD	Response	Char (4)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
ID=	Template ID	Char (10)	Yes	

PCT/US98/20148 WO 99/16207

NODE=	Data	Char	see above formatting

ic sauge	Name	Parameter Type		Value
	Request	Char (4)	Yes	
GURL	User ID	Char (20)	Yes	UserID
JSERID= RPTTMPID	Report Template ID	Char (10)	Yes	Template ID
=	Enterprise ID	Char (8)	Yes	Enterprise ID
ENTPID=	Product ID	Char (1	Yes	V,C,S,T,H
PRODUCT= DATACAT	Data Category	Char (1)	Yes	P = Priced U = Unpriced

Message	Rarameter/Nam	e : Parameter i y	heartedans	Value
	Response	Char (4)	Yes	
SURL	Error Code	Char (4)	Yes	0 or error
ERROR= REPORTS=	Data	Char	No	See above formatting

Get User Repor	Parameter	Parameter :	Required-	#Acceptablesvalue
GURD REPORTID=	Request User Report ID	Char (4) Char (10)	Yes Yes	Report ID (i.e., 245). Limit on unique user report Ids is 2147483647

PCT/US98/20148

Send User Report Detail

Message.	Parameter Name	Parameter Type	Requirer	i Acceptable Value
SURD	Response	Char (4)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
ID=	Template ID	Char(10)	Yes	
NODE=	Data	Char		see above formatting

Add Report Definition

Add Report Den		Name and Part of the Part of t		Acceptable:Value=
Message	Parameter:Name::	Param Type	Hequirea.	Acceptante value
ARD	Request	Char (3)	Yes	
USERID=	User's ID	Char (20)	Yes	UserID
ENTPID=	Enterprise ID	Char (8)	Yes	Enterprise ID – require 8 characters
STDRPTID=	Standard Report ID	Char (10)	Yes	Standard Report ID (i.e., 2, 44).
NAME=	User's report name	Char(100)	Yes	User's designated name for this report (e.g., My Longest Calls)
PRODUCT=	Product	Char (1)	Yes	Vnet = V, CVNS = C, Vision = S, Toll Free = T, Broadband = H
CATEGORY=	Report category Description	Char	Yes	Examples are: Analyze Traffic, Standard Report, Telecommunicatio ns
THRESHOLD =	Record limits	Delimiter	No	holds RECCOUNT, RANKING, DURATION, ANI

PCT/US98/20148 WO 99/16207

ntese egico:	i e iguvene akomie	akaleinin van L	E spillaste	
RECCOUNT=	Record count	Char (4)	Yes	Maximum amount of records to be returned in the report results. If no threshold is received, the threshold for the standard report will be used.
RANKING=	TVS Ranking	Char (3)	No	show. If ranking is not passed, the default value will be used.
DURATION=	TVS Duration	Char (4)	No	# for call duration threshold. If duration is not passed, the default value will be used. # of Items in Most
ANI=	TVS ANI	Char (3)	No	Frequent report. If ANI is not passed, the default value will be used. If scheduling
SCHEDULE=	Report schedule	Char ()	No	information is not received, the Report Manager will only store the report. It will not send a request to the fulfilling server. No overlapping dates will be sent in the start/end pairs. A = Adhoc, H = Hourly, D = Daily, W= Weekly, M = Monthly
START=	Start report schedule	Char (12)	No	YYYYMMDDhhm m This parameter is only used if the report is Adhoc. There can be multiple start and end dates.

were een	i sa simisi sa Navilsi T		นสุเยอไม่มีเรีย	ATRIAL MODELLA SERVICE
END=	End report schedule	Char (12)	No	YYYYMMDDhhm m This parameter is only used if the report is Adhoc. There can be multiple start and end dates.
RANGETYPE =	Range type picked by the user	Char(1)	Yes if Adhoc	1 = range 0 = discreet
SCHEDTYPE =	Schedule Type picked by the user	Char(1)	Yes	A = Adhoc only R = Recurring only
TIMEZONE=	User's time zone	Char (3)	Yes	User's time zone value as received from StarOE
NDIALED=	Filter	Char	Yes for TVS, No for all others	Number range delimited by ~
BILLING=	Hierarchy	Char	Yes for ODS, and TVS outbound. No for all others	Single or multiple values from billing hierarchy. Must at least include the Corp ID
CARDNO	Card number	Char	No	Single or multiple values
IDAC=	ID/Account Codes	Char	No	Single or multiple values
GEO=	Geographical	Char	No	Single or multiple values from geographical hierarchy.
IACCESS=	Inbound Access	Char	No	Single or multiple values of inbound access codes(Example: 7)
OACCESS=	Outbound Access	Char	No	Single or multiple values of outbound access codes (Example: 4)
IDISTRANGE =	Inbound Distance Range	Char	No	Single or multiple values of inbound distance ranges codes(Example: 2)
IUSAGE=	Inbound Usage	Char	No	Single or multiple values of inbound usage (Examle: 5)

ur sa dri sa a l	energient in			Assestitudio dell'Ista
	Outbound Outbound Outbound Outbound	Char	No	Single or multiple values of outbound distance ranges (Example: A)
OUSAGE=	Outbound Usage	Char	No	Single or multiple values of outbound usage (Example:2) I
SORTBY=	Sort Order	Char	No	If sort order is not received, sort order for standard report will be used. If sort order is passed, it must be a column ID and descending or ascending order (i.e., 1A).
DESCRIPTIO N=	Description	Char	No	user's report description. If no description is received, the description for the standard report will be used.
COLUMNS=	Columns	Char	No	These are the columns the user wants in their report. Field Ids are to be passed here (i.e., 5~17~23~44). Use default if not passed.
ACTIVE=	Indicates whether or not the report is scheduled	Char (1)	No	Save only = 0, Schedule = 1, 0 is the default.
DURRANGE=	Duration Range	Char	No	Single or multiple values from the duration pick list 0 = None (default),
TOTALMODE =	required based on user selection		No Yes if	1 = Subtotal, 2 = Total, 3 = Both.
SUBTOTCOL	Indicates which columns the user wants subtotals or		TOTALMO DE is 1 or 3.	subtotaled
MMADDR=	Email address	Char(75)	No	Text Text
MMTEXT=	Message	Char(500)	No	ı lexi

Marie e de la composition della composition dell				A Superior die Vende
PGPin=	Pager Pin	Char(8)	No	Pin Number
PGTxt=	Message	Char(240)	No	Text
EMAIL=	Indicates if user picked email.	Char(1)	Yes	0 = no, 1 = yes
PAGE=	Indicates if User picked page	Char(1)	Yes	0 = no, 1 = yes
LANG=	Indicates the language a user picked.	Char(4)	No	Default will be American English, the values are not defined.
CURR=	Indicates the language a user picked	Char(4)	No	Default will be American Dollar, the values are not defined.

Add Report Definition Acknowledgment

Message >	Parameter Name	Param: Type	FRequire	i Acceptable Value
ARDA	Response	Char (4)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
USERRPTID =	User ReportID	Char (10)	No	User Report ID (i.e., 245). Limit on unique user report Ids is 2147483647.

Delete Report Definition

Message ³	Parameter≄ Names	÷Param'Type:∹	Required	Acceptable Value
DRD	Request	Char (3)	Yes	
USERID=	User's ID	Char (20)	Yes	UserID
USERRPTID	User Report ID	Char (10)	Yes	User Report ID (i.e., 245). Limit on unique user report Ids is 2147483647

#Message:	Parameter Name:	- Param Type	: IRRequire	d: .: Acceptable Value
DRDA	Response	Char (4)	Yes	

ERROR=	Error Code	Char (4)	Yes	0 or error
	User Report ID	Char (10)	No	User Report ID (i.e., 245). Limit on unique user report Ids is
				2147483647

Message	Parameter Name	- Parameter≇Type		i l Acceptable Value ≉
CRD	Request	Char (3)	Yes	
USERRPTID =	User Report ID	Char (10)	No	User Report ID (i.e., 245). Limit on unique user report Ids is 2147483647
NAME=	User report	Char (50)	Yes	User report name

Copy Report Definition Acknowledgment

The same of the sa	ition Acknowledgine Parameter Name	Parameter Typ	e ⊸Require	l Acceptable Value
CDDA	Response	Char (4)	Yes	
CRDA	Error Code	Char (4)	Yes	0 or error
ERROR= USERRPTID =	User Report ID	Char (10)	No	User Report IC (i.e., 245). Limit on unique user report Ids is 2147483647

Update Report Message	Status Parameter Name	Param: Type:/-	#Required #	& Acceptable Value:
URS USERRPTID =	Request User Report ID	Char (3) Char (10)	Yes No	User Report ID (i.e., 245). Limit on unique user report Ids is 2147483647

ACTIVE	User Active	Char(1)	Yes	0 - for saved/not scheduled
				1 - for scheduled

Update Report Scheduling Acknowledgment

	Name			-value -
URSA	Response	Char (4)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
USERRPTID =	User Report ID	Char (10)	No	User Report IC (i.e., 245). Limit on unique user report Ids is 2147483647

Get Pick List - Access

	. Name≥ ⊆			value
GPL	Request	Char (3)	Yes	
PL_ACCESS=	Pick List Type	Character	Yes	PL_ACCESS
O=	Inbound/Outboun	Char (1)	Yes	I=Inbound, O=Outbound,
PRODUCT=	Product	Char (1)	Yes	T=Toll Free, V = Vnet, S = Vision, C = CVNS, H = Broadband
DATACAT=	Data Category	Char (1)	Yes	U = Unpriced, P = Priced,
			}	B = Both

Get Pick List Acknowledgement - Access

Message	∏Parameter ⊚Name=	Parameter Typ	e - ∏Require	d Acceptables Values
GPLA	Response	Char (4)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
PL_ACCESS=	Pick List Type	Character	Yes	Access code, Description

Get Pick List - Fields

lessage.	- Parameter	Rarameter Lyp	e - Heguire	Value
	zname:			
3PL	Response	Char (3)	Yes	
L FIELDS	Pick List Type	Character	Yes	PL_FIELDS
RPTTMPID=	Report Template ID	Char (10)	Yes	

Get Pick List Acknowledgement - Fields

Message*	Parameter : Names	- Parameter-Type	⊮Required :	Acceptable Value:
GPLA	Response	Char (4)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
PL_FIELDS=	Pick List Type	Character	Yes	FieldID, FieldHeader, FieldColumnHi de, FieldSort

Get Pick List - Duration

Message ⁽ :	Parameter Name:	Parameter.∏yr	es : Require	d ⊫Acceptable. Value≘
GPL	Response	Char (3)	Yes	Single or Multiple Values
PL_DURATION	Pick List Type	Character	Yes	PL_DURATIO N

Get Pick List Acknowledgement - Duration

Message	Parameter. Name	ParameteraTyp	e : ;:Require	d
GPLA	Response	Char (4)	Yes	Single or
ERROR=	Error Code	Char (4)	Yes	0 or error
PL_DURATION=	Pick List Type	Character	Yes	Duration
example		,		

Get Pick List - Time Zone

Message	Parameter:	Parameter Typ	e Require	da [†] Acceptable. Value≕
100				
GPL	Response	Char (3)	Yes	
PL TIMEZONE	Pick List Type	Character	Yes	PL_TIMEZONE

Get Pick List Acknowledgement - Time Zone

Message	Parameter: Name	Parameter Typ	e : Require	d Acceptable Value:
GPLA	Response	Char (4)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
PL_TIMEZONE=	Pick List Type	Character	Yes	TimeZoneCode , Description

Get Pick List - Billing Hierarchy

Message>	Rarameter.:	; Parameter Typ	e.aRequire	d π≱Accepτaple Value
CDI	Response	Char (3)	Yes	
GPL				PL HIER
PL HIER	Pick List Type	Character	Yes	I PL DIED

Get Pick List Acknowledgement - Billing Hierarchy

.Мезяде≗∵∵	Parameter Name	Parameter-Typ	e : Require	d ::: Acceptable :: * Value ::
GPLA	Response	Char (4)	Yes	and the second s
ERROR=	Error Code	Char (4)	Yes	0 or error
PL_HIER-	Pick List Type	Character	Yes	hierarchy data

Get Pick List - Geographical Hierarchy

Message	Parameter Name:	Parameter:Type		Value
GPL	Response	Char (3)	Yes	
PL GEO	Pick List Type	Character	Yes	PL_GEO
USERRPTID=	User Report ID	Char (10)	Yes	User report ID

Get Pick List Acknowledgement - Geographical Hierarchy

Message	, Harameter Name:	Parameter:Typ		d ∍ Acceptable⊼ ∟Value::
GPLA	Response	Char (4)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
PL_GEO	Pick List Type	Character	Yes	geo data

Get Pick List - Static Range

Get Pick List —: Message	CANADA TO THE REAL PROPERTY AND ADDRESS OF THE PARTY OF T	Rarameter Typ	e - Require	d : Acceptable Value
GPL	Response	Char (3)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
PL_RANGE	Pick List Type	Character	Yes	PL_RANGE
IO=	Inbound/ Outbound	Char (1)	Yes	I=Inbound, O=Outbound,
PRODUCT=	Product	Char (1)	Yes	T=Toll Free, V = Vnet, S = Vision, C = CVNS, H = Broadband
DATACAT=	Data Category	Char (1)	Yes	U = Unpriced, P = Priced, B = Both

Get Pick List Acknowledgment - Static Range

	Parameter: Name:		e z´ - Require	d
GPLA	Response	Char (4)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
PL_RANGE=	Pick List Type	Character	Yes	range code, description

Get Pick List - Static Usage

	Parameter: Name≒:		e ··· Require	d≮leAcceptable≊ Value:
GPL	Response	Char (3)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
PL_USAGE	Pick List Type	Character	Yes	PL_USAGE
10=	Inbound/ Outbound	Char (1)	Yes	t=Inbound, O=Outbound,

PRODUCT=	Product	Char (1)	Yes	T=Toll Free, V = Vnet, S = Vision, C = CVNS, H = Broadband
DATACAT=	Data Category	Char (1)	Yes	U = Unpriced, P = Priced, B = Both

Get Pick List Acknowledgment - Static Usage

Message⊭	Name	Parameter:Typ		d⊹⊪Acceptable Value
GPLA	Response	Char (4)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
PL_USAGE=	Pick List Type	Character	Yes	usage code, description

Get Pick List - Language

Message:	Parameter	Parameter Typ	e Require	d: Acceptable
	Name			value
GPL	Response	Char (4)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
PL_LANG=	Pick List Type	Character	Yes	Language code

Get Pick List Acknowledgment -Language

Message	∏Parameter- ⊮Name	EParameter₌Typ	e nequie	Value
GPLA	Response	Char (4)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
PL_LANG=	Pick List Type	Character	Yes	Row information to follow

Get Pick List - Currency

:Message	Parameter. Name	. Parameter Ty	pe Required	Acceptable Value
GPI	Response	Char (4)	Yes	

			1.57	0 or error
ERROR=	Error Code	Char (4)	Yes	
		Character	Yes	Currency code
PL_CURR=	Pick List Type	Character		

Get Pick List Ack Message	nowledgment - Curren Parameter∠ Name≥	Parameter-Typ	e = 1.º Requirec	Li∓Acceptable Value:
COLA	Response	Char (4)	Yes	
GPLA	Error Code	Char (4)	Yes	0 or error
ERROR= PL_CURR=	Pick List Type	Character	Yes	Row information to follow

APPENDIX B

Notify Report L				
Message	Parameter Name	Type	Nicola de Salado	Acceptable Value:
NRL	Request	Char (3)	Yes	
TYPE=	Designates report type, call detail type, or news type	Char (30)	Yes	e.g. Broadband, priced, real-time, exception, invoice, MIR, CCID, priced call detail, outage
ENTPID=	Enterprise ID	Char (8)	Yes	Enterprise ID
USERID=	User's ID	Char (20)	Yes	UserID
STDRPTID=	Standard Report ID	Char (10)	Yes	Standard Report ID (i.e., 2, 44).
USERRPTID =	User Report ID	Char (10)	Yes when fulfilling server is using the StarWRS Report Requeste	User Report ID (i.e., 245). Limit on unique user report Ids is 2147483647
REQUESTID =	Unique Request ID	Char (10)	Yes when fulfilling server is using the StarWRS Report Requeste	Unique request ID sent to fulfilling server in ARD. Limit on request ID is 2147483647.
PRIORITY=	Standardized Network Management Priority Levels	Char (1)	ONLY news	1 = fatal, 2 = major, 3 = minor, 4 = info(default), 5 = no alert
COMPRESS =	Designates whether the data has been compressed	Char (1)	Yes	0 = data not compressed, 1 = data compressed
LOC=	Location	Char (255)	Yes	File Path, name and extension
FSIZE=	Size of associated file in bytes	Char (10)	Yes	Limit is 2147483647

Message »-		Param: Type::	Required	Acceptable Value:
REPORTTIT LE=	Report Title	Char (100)	Yes when fulfilling server is not using the StarWRS Report Requeste r	Report title to be displayed in Inbox.
PRESORTE D=	Indicates whether or not the fulfilling server sorted the data on their side.	Char (1)	Yes	0 = not presorted, 1 = is presorted.
ERR=	Used to when there is no report file, but there is an informational file.	Char (1)	No	ERR=1 or ERR=0
TOTAL=	Fulfilling server totals	Char	No	Sent by fulfilling server to indicate report totals. Column ID and total are passed.
CATEGORY	Report, call detail, or news	Char (1)	Yes for StarOE. Report Manager will determine for fulfilling servers.	R = Report, D = Call Detail, F = News

Notify Report Location Acknowledgement

Notify Report L	ocation Acknowledg	ement	And the same and the same of the same of	The state of the s
Message	Parameter≟Nae∤	Param. Type	Require	d : Acceptable Value :
NRLA	Response	Char (4)	Yes	
ERROR=	Error Code	Char (4)	Yes	0 or error
USERID=	User ID	Char (20)	Yes	User ID
USERRPTID =	User Report ID	Char (10)	Yes	User Report ID (i.e., 245). Limit on unique user report Ids is 2147483647

		Туре	Required =	-Acceptable Value Unique request ID
REQUESTID =	Unique Request ID	Char (10)	fulfilling server is using the StarWRS Report Requeste	sent to fulfilling server in ARD. Limit on request ID is 2147483647.

WO 99/16207

APPENDIX C

Message=""	- Parameter	Param:	Required	::Acceptable:Value::::
	Namez	N. C.		A - 0 dd
Α	Add request	Char (1)	Yes	A = add
SEV=	Servity of notification message	Char (1)	No	1, 2, or 3
CATEGORY =	Item category is an report, call detail, or news	Char (1)	Yes	R = Report, D = Call Detail, F = News
TYPE=	Designates report type, call detail type, or news type	Char (30)	Yes	e.g. Broadband, priced, unpriced, exception, invoice, MIR, CCID, priced call detail, outage
USERID=	Designates intended recipient or audience	Char (20)	Yes	Starbucks username as assigned in StarOE
RPTID=	User report ID	Char (30)	Reports and data only	User report ID (i.e., 245)
PRIORITY=	Standardized Network Management Priority Levels	Char (1)	ONLY news	1 = fatal, 2 = major, 3 = minor, 4 = info (default), 5 = no alert
COMPRESS =	Designates whether the data has been compressed	Char (1)	Yes	0 = data not compressed, 1 = data compressed

lessage=	Rarameter Name	Param. Type	пеципец	(Acceptable Value
JNOTIFY=	Says if user should be paged or emailed when the Inbox item is received by the Inbox server	Char (1)	No	0 = None (default), 1 = Page, 2 = Email, 3 = Email and page
MMADDR	Override email address	Char(75)	No	Must contain @ e.g. userA@mci.com
MMTEXT	Override email message text	Char(500)	No	
PGT	Override pager type	Char(1)	No	As supported by Star_OE
PGPIN	Override pager PIN	Char(8)	No	Numerics only
PGTXT	Override pager text	Char(240) or Char(20)	No	Alphanumeric pagers or Numeric pagers
RPTCATEG ORY=	Report category (report name)	Char (50)	ONLY report	e.g. – Longest Calls
LOC=	Location	Char (255)	Yes	File Path, name and extension
ENTPID=	Enterprise ID	Char (8)	Yes	As assigned in StarOE
RQSTDT=	Report or data request date/time stamp	Char (12)	ONLY report or data	YYYY-MM-DD HH:MM
FSIZE=	Size of associated file in bytes	Char (10)	Yes	Limit is 2147483647
RPTTITLE=	User-defined report title, call detail request name, or news short text	Char (255)	Yes	Example: "Call Duration Summary"
MSIZE=	Size of associated metadata for transfer	Char (10)	ONLY report or data	Limit is 2147483647
ERRFLAG=	Fulfilling server reported an error	Char (1)	No	0 = no error (default 1 = error

Add Acknowledgment

Add Acknowle	agment			
: Message:	Parameter. Name:	Param Type	Required	S Acceptable Value
Z	Response	Char (1)	Yes	Z
REQ=	Request which is being acknowledged	Char (1)	Yes	A, D, L, F, U
ERROR=	Error Code	Char	Yes	0 = no error or error code
INBOXID=	Inbox ID	Char(10)	No	Uniquely assigned id

APPENDIX D

Add Report Definition

And Report Det		The same of the sa	City of the second seco	
Messagez	Parameter:Name :=	Type	-Hequired	Acceptable Value
ARD	Request	Char (3)	Yes	
ENTPID=	Enterprise ID	Char (8)	Yes	Enterprise ID
USERID=	User's ID	Char (20)	Yes	UserID
STDRPTID=	Standard Report ID	Char (10)	Yes	Standard Report ID (i.e., 2, 44).
USERRPTID =	User's Report ID	Char (10)	Yes	User Report ID (i.e., 345). Limit on unique user report IDs is 2147483647.
REQUESTID	Unique Request ID	Char (10)	Yes	Unique Request ID. Limit is 2147483647
PRODUCT=	Product	Char (1)	Yes	Vnet = V, CVNS = C, Vision = S, Toll Free = T, Broadband = H
THRESHOL D=	Record limits	Delimiter	Yes	RECCOUNT, RANKING, DURATION, ANI

(Vijašis jota)	Etapa prodetringa eta			A catacaparable VECtion
RECCOUNT =	Record count	Char (10)	No	Maximum amount of records to be returned in the report results. If no threshold is received, the default reccount threshold from the report template will be passed.
RANKING=	TVS Ranking	Char (3)	No	# of call ranks to show. If ranking is not passed, the default value will be passed. This is a TVS only parameter. Range is 1-400.
DURATION=	TVS Duration	Char (4)	No	# for call duration threshold. If duration is not passed, the default value will be passed. This is a TVS only parameter. Format is mmss. Range is 1-5959.
ANI=	TVS ANI	Char (3)	No	# of Items in Most Frequent report. If ANI is not passed, the default value will be used. This is a TVS only parameter. Range is 1-400.
COLUMNS=	Columns	Char	Yes	These are the columns the user wants in their report. Field Ids are to be passed here (i.e., 5,17, 23,44).

, vijete synoje	A (S. J. S. T. J. S.	areisia Transca	ACTOORINGS	nvejākiejadelaliena/delivie=El
FILTERS=	Filters or Criteria	Delimiter	Yes for	Contains multiple filters (i.e., NDIALED). If filters are not received, filters from the standard report template (if any) will be stored and/or sent with request to fulfilling server.
NDIALED=	Filter	Char	Yes for TVS, no for all others	Number range
BILLING=	Hierarchy	Char	Yes for ODS, Yes for TVS Vision and VNET Outbound	Single or multiple values from billing hierarchy. Must at least include the Corp ID
DURRANGE =	Duration Range	Char	No	Single or multiple values.
CARDNO=	Card Number	Char	No	Single or multiple values from the duration pick list
IDISTRANGE =	Inbound Range	Char	No	Single or multiple values from the Range pick list
ODISTRANG E=	Outbound Range	Char	No	Single or multiple values from the Range pick list
IUSAGE=	Inbound Usage	Char	No	Single or multiple values from the Usage pick list
OUSAGE=	Outbound Usage	Char	No	Single or multiple values from the Usage pick list
IDAC=	ID/Account Codes	Char	No	Single or multiple values
GEO=	Geographical	Char	No	Single or multiple values from geographical hierarchy.
IACCESS=	Inbound Access	Char	No	Single or multiple values of inbound access items

			KKa© jraist V-j j	Angerment average
OACCESS=	Outbound Access	Char	No	Single or multiple values of outbound access items
SORTBY=	Sort Order	Char	Yes	If sort order is not received, sort order for standard report will be used. If sort order is passed, it must be a column ID and ascending (A) or descending (D) (i.e., 1D).
TIMEZONE=	Timezone info.	Delimiter	Yes	LABEL and OFFSET.
LABEL=	Time description	Char (3)	Yes	Timezone label (ie, MST).
OFFSET=	GMT offset	Char (5	Yes	User's Time Zone in relation to GMT e.g. +2, -5. Valid range is -12 through +13. Offsets will be in 1 hour increments for the 98.1 release.
SCHEDULE=	Report schedule	Char ()	Yes	The Report Scheduler will not send a request to the fulfilling server if the report was not scheduled. A = Adhoc, H = Hourly, D = Daily, W= Weekly, M = Monthly
START=	Start report schedule	Char (12)	Yes	YYYYMMDDhhm m This parameter is only used if the report is Adhoc. These can be multiple start and end dates. Start and end times must be passed in pairs and will be in GMT format.

Mercal Section	rielen vieltelline:		%=tate)(vatat	YMERCOTT PROPERTY.
END=	End report schedule	Char (12)	Yes	YYYYMMDDhhm m This parameter is only used if the report is Adhoc. There can be multiple start and end dates. Start and end times must be passed in pairs and will be in GMT format.
TOTALMOD E=	Total mode the user selected.	Char (1)	Yes for ODS, No for all other fulfilling servers.	0 = None (default), 1 = Subtotal, 2 = Total, 3 = Both.
SUBTOTCO L=	Subtotal columns	Char	Yes if TOTALMO DE is 1 or 3.	Subtotal column IDs.

Add Report Definition Acknowledgment

Add Report Def	inition Acknowledg	ment	The same of the sa	A contable Value
Message:	Parameter:	Param:: Type='*	Required	Acceptable Value:
ARDA	Response	Char (4)	Yes	0 or error
ERROR= USERRPTID	Error Code User Report ID	Char (4) Char (10)	Yes No	User Report ID
=				(i.e., 245). Limit on unique user report Ids is 2147483647. Please use this token whenever possible. The only time it should not be used is when the fulfilling server cannot parse the message at all.
REQUESTID	Unique Request	Char (10)	Yes	Request ID. Limit is 2147483647.
=	ID	<u> </u>		

APPENDIX E

Error Code	anager Proxy Codes Eποτ Description Enor Description
	OK - request processed successful, response includes any data or
6050	Retransmission on NRLA
6101	General failure
6102	Failure with parser building parameters
6103	Parameter error – missing, etc.
6104	No valid request
6105	Database connectivity error
6106	Database command error
6107	Report Manager ID error
6108	Error opening file
6109/7000	no records found meeting criteria
6110	SOL cannot connect
	Cannot execute stored procedure
6111	SOI open cursor
6112	Enterprise ID or user report title empty
6113	Required parameters are missing
	IDs are not correct
6115	FF not correct
6116	Report title is null
6600	Number dialed is null
6601	Start date is null
6602	End date is null
6603	Token is unknown
6610	Empty or incorrect input string
6611	Unbalanced brackets
6612	Required tokens missing
6701	Missing parameter value
6702	Required tag in message has no value.
6703	and the empty
6704	if cohed type ned addice.
6705	
6706	Enterprise id length is invalid 2 check coming. Fulfilling server returned a response that appears to be incorrect.
6707	Missing ACTIVE parameter
6801	ACTIVE parameter missing value
6802	Missing CATEGORY parameter
6803	CATEGORY parameter missing value
6804	Missing COMPRESS parameter
6805	COMPRESS parameter missing value
6806	Missing DATACAT parameter
6807	DATACAT parameter missing value
6808	Missing DATATYPE parameter
6809	DATATYPE parameter missing value

6811	Missing DESCRIPTION parameter
6812	DESCRIPTION parameter missing value
6813	Missing EMAIL parameter
6814	EMAIL parameter missing value
6815	Missing ENTPID parameter
6816	ENTPID parameter missing value
6817	Missing FSIZE parameter
6818	FSIZE parameter missing value
6819	Missing FUL SERVER parameter
6820	FULSERVER parameter missing value
6821	Missing LOC parameter
6822	LOC parameter missing value
6823	Missing NAME parameter
6824	NAME parameter missing value
6825	Missing PAGE parameter
6826	PAGE parameter missing value
6827	Missing PRODUCT parameter
6828	PRODUCT parameter missing value
6829	Missing REPORTID parameter
6830	REPORTID parameter missing value
6831	Missing RPTTMPLID parameter
6831	RPTTMPLID parameter missing value
6833	Missing SCHEDTYPE parameter
6834	SCHEDTYPE parameter missing value
6835	Missing STDRPTID parameter
6836	STDRPTID parameter missing value
6837	Missing TYPE parameter
6838	TYPE parameter missing value
6839	Missing USERID parameter
6840	USERID parameter missing value
6840	Missing USERRPTID parameter
6842	USERRPTID parameter missing value

Error:Code:	Error Description OK – request processed successful, response includes any data requested again.
)	OK - request processed successful, response metallic item had already been added to the inbox and will not be added again.
5005	item had already been added to the mook and was
5100	No records found (status code).
5101	Failure in parser building parameter list, unknown or invalid token may have been encountered.
5102	Required parameter missing
5103	t t 1: 1 lenoure
5104	During Fetch request, the file specified in the Inbox database could not be opened
5105	Could not make an SQL connection to the Inbox database
5106	Error occurred trying to execute the stored procedure

	Error occurred during an SQL open cursor call
5107	Error occurred during an SQL open cursor our Error occurred trying to construct the filename for a Fetch metadata
5108	
	Parameter (Inboxid or Userid) missing on update command.
5111	Parameter (Inboxid or Userid) missing on appear
5112	TTL missing or invalid on Update
5113	Category missing on Update.
5121	InboxID parameter missing in Fetch.
5125	no records found for deletion by stored procedure
5131	UseriD parameter missing in List.
5132	Category missing in List.
5141	UserID parameter missing in Delete.
5151	Category parameter invalid in Add.
5152	- I m a mater invalid in Add.
	EntplD+UserID parameter missing or invalid in Aud.
5153	RntID parameter missing in Add.
5154	G wares parameter missing in Add.
5155	Say parameter missing when Unotity specified in Add.
5156	RptCategory (report name) parameter missing in Add.
5157	Loc parameter missing in Add.
5158	Requested date parameter missing in Add.
5159	Fsize parameter missing in Add.
5160	D. Tide peremeter missing in Add.
5161	Msize parameter missing in Add for Report or Data.
5162	File as specified in Loc parameter does not exist.
5163	- I whom I inotity specified.
5164	COMP and LOC parameters conflict, e.g. compress indicated but
5165	extension does not end with _zip.
	at 1 and out of
5166	User notification error – used in conjunction with 5171, 5172, 5174
5170	User notification end = discum conjunction
5171	No user or enterprise ID in user notification
5172	Notification level is null
5174	Unknown notification level
5178	Invalid constructor call in user notification
5179	Invalid constructor can in cost symbol) in user notification Invalid email address (no (a) symbol) in user notification
5180	No address or text exists in user notification for email
5182	No address or text exists in user notification Page could not be sent – required fields missing in user notification
5183	
5184	StarOE returned an error when trying to obtain default email/paging info Error when attempting to fork a child process in email/paging
5185	Error when attempting to fork a child process in email/paging

APPENDIX F

et Metadata essage	Parameter Name			Acceptable Value
METADATA=	Delimiter	Char	Yes	
	Delimiter	Char		Name of report
Name=	Name of report	Char(100)	Yes	Column ID and
Total_Inbound_A mount=	Total inbound amount	Char	No	Total passed in by fulfilling server in NRL.
Total_Outbound_ Amount=	Total outbound amount	Char	No	Column ID and total passed in by fulfilling server in NRL
Total_Amount=	Total of inbound and outbound	Char	No	Column ID and total passed in by fulfilling server in NRL
Total_Inbound_ Minutes=	Total inbound minutes	Char	No	Column ID and total passed in by fulfilling server in NRL
Total_Outbound_ Minutes=	Total outbound minutes	Char	No	total passed in by fulfilling server in NRL
Total_Minutes=	Total of inbound and outbound	Char	No	Column ID and total passed in by fulfilling server in NRL
Total_Inbound_C alls=	Total outbound calls	Char	No	Column ID and total passed in by fulfilling server in NRL
Total_Outbound_ Calls=	Total inbound calls	Char	No	Column ID and total passed in by fulfilling server in NRL
Total_Calls=	Total of inbound and outbound	Char	No	Column ID an total passed in by fulfilling server in NRL

Total= TVS total TVS, No for all others TVS, No for all others TVS insert text "Totals are located at the bottom of the report." Report_Level= Report level selected for this report Options= Option line Char Char Yes Al Levels, Service Group, Billing Group, etc. No values will be displayed with this. Supp_Code= Supplemental Codes selected by customer Access_Type= Access type selected by customer Card_Number= Card numbers selected by Customer ID/Accounting_C action in the customer Number dialed by Customer Number Dialed= Number Galed by customer Ves No List of card numbers selected by Customer No List of IDACs if selected. No List of IDACs if selected. No List of IDACs if selected. No No List of ranges No List of ranges Scheduling_Infor Scheduling line mation= Or Recurring= Start and end dates Start and end dates if one time report or recurring type.				Yes if	If fulfilling
Description= Description of report. Description= Description of report. Char (100) Yes Description of report. Report_Level= Report level selected for this report. Options= Option line Char Option line Supp_Code= Supplemental Codes selected by customer Char Selected Description of Selected	Total=	rVS total	Char		server is TVS
Description= Description of report. Description= Description of report. Description of report. Report Level= Report level selected for this report Options= Option line Supp_Code= Supplemental Codes selected by customer Char selected by customer Access_Type= Access type selected by customer ID/Accounting_C ID/A	Total-				insert text
Description= Description of report. Char (100) Yes Description of the report. Description of report. Report_Level= Report level selected for this report Selected for this report Dottons= Option line Char Supplemental Codes selected by customer Card numbers selected by customer Dialed= Number dialed Number Dialed= Number dialed Number Dialed= Number dialed Number Dialed= Number dialed Number Selected Dy customer Char No List of IDACs if selected. Char No List of ranges Dy customer No List of ranges Dotton Recurring= Char No List of underson No List of underson No List of larges displayed with this. The codes of the code of the codes of the codes of the codes of the code of the code of the codes of the code of					"Totals are
Description= Description of report. Description= Description of report. Description of report. Description of report. Description of report. Description of report runcated to 100 characters. All Levels, Service Group, Billing Group, etc. No values will be displayed with this. If one time, show the multiple start and end dates if one time report. Description of report runcated to 100 chars. All Levels, Service Group, Billing Group, etc. No values will be displayed with this. Description of report runcated to 100 chars. No List of supplemental codes if selected. No List of List of IDACs if selected. Description of report runcated to 100 chars. Description of report runcated to 100 chars. No Dial 1, Card, etc. Etc. Char No List of IDACs if selected. Description of runcated to 100 chars. No List of ranges. No List of ranges. No values will be displayed with this. If recurring no values will be displayed with this. If one time, show the multiple start and end dates if one time report or recurring type.				Ulliers	located at the
Description= Description of report. Report_Level= Report level selected for this report Options= Option line Char Supplemental Codes selected by customer Card numbers selected by customer Number_Dialed= Number_dialed Char No List of ranges Selected by customer ID/Accounting_C ID/Acs selected by customer Usage= Usages selected by customer Scheduling_Infor mation= One_Time= Or Recurring= One_Time= Or Recurring= One_Time= Or Recurring= One_Time= Or Recurring= One_Time=	1	1		1	bottom of the
Description of report. Char (100) Pescription of report report. Report_Level= Report level selected for this report Options= Option line Options= Option line Char Char Yes All Levels, Service Group, Billing Group, etc. No values will be displayed with this. List of supplemental codes if selected by customer Access_Type= Access type Selected by customer Card_Number= Card_numbers Selected by customer ID/Accounting_C odes= Number_Dialed= Number dialed Number dialed Char No List of IDACs if selected by customer No List of IDACs if selected by customer No Number_Dialed= Number dialed Char No List of ranges Ranges selected by customer Usage= Usages selected by customer Scheduling_infor mation= One_Time= Or Recurring= Other Start and end dates if one time report or Char Char Ves Char Ves Start and end dates if one time report or Ves Start and end dates if one time report or Scheduling type Start and end dates if one time report or	Į.			1	report."
Description Description of report. Char (100) Report Peport Pep	Į.				Description of
Report_Level= Report level selected for this report		Description of	Char (100)	Yes	Description
Report_Level= Report level selected for this report			•		report
Report_Level	. 1	report.			truncated to
Report_Level= Report level selected for this report Char Service Group, Billing Group, etc.	ì				
Report_Level=			Char	Yes	All Levels,
Selected for first report Options= Option line Options= Option line Options= Option line Supp_Code= Supplemental Codes selected by customer Access_Type= Access type selected Selected by customer Card_Number= Card numbers selected by customer Odes= No Dial 1, Card, etc. List of card numbers selected by customer ID/Accounting_C iDACs selected by customer Number_Dialed= Number dialed Char No List of IDACs if selected. Dates= Vages selected by customer Char No List of ranges No List of ranges No List of ranges Char No List of ranges No List of usages No List of usages Char No List of usages No values will be displayed with this. If recurring no values will be displayed with this. If one time, show the multiple start and end dates if one time or proport or recurring type	Report Level=	Report level	Chai		
Options= Option line	Nepon_2010	selected for this		İ	Billing Group,
Options= Option line	1	report			etc.
Options= Option line be displayed with this. Supp_Code= Supplemental Codes selected by customer Char Selected. Access_Type= Access type selected by customer Char No District of selected. Card_Number= Card numbers selected by customer Char No List of IDACs if selected. Char No B00 numbers Selected by customer No District of IDACs if selected. Char No List of IDACs if selected. No List of IDACs if selected by customer No List of ranges Number_Dialed= Number_dialed Char No List of ranges District of IDACs selected by customer No List of ranges District of IDACs if selected. Char No List of ranges District of IDACs if selected Di	1				No values will
Supp_Code= Supplemental Codes selected by customer Char Selected. Access_Type= Access type selected by customer Char Selected Char Selected Selected by customer Char Selected Selecte		Ontion line			he displayed
Supp_Code	Options=	Орион			
Supp_Code=					
Supp_Code=		Olemental	Char	No	List of
Codes selected by customer Codes Selected Codes Selected Codes Selected Codes Selected Codes Selected Codes	Supp_Code=	Supplemental	On.a.		supplemental
Access_Type=					
Access_Type=		by customer			
Access_Type= selected selected Selected Selected Selected Selected Selected Selected Selected by Customer Selected by Customer Selected by Customer Selected				No	Dial 1, Card,
Card_Number=	Access Type=	Access type	Char		
Card_Number= Card numbers Selected by Customer	Access_1) Po			No	List of card
selected by customer ID/Accounting_C odes=	a d Number=	Card numbers	Char	140	numbers
ID/Accounting_C odes= IDACs selected by customer IDACs selected ID	Card_Number=	selected by			
ID/Accounting_C odes= IDACs selected by customer Char No selected. Number_Dialed= Number dialed Char No List of ranges Range= Ranges selected by customer Char No List of usages Usage= Usages selected by customer Char No List of usages Scheduling_Infor mation= Scheduling line or selected by customer Char Yes If recurring no values will be displayed with this. If one time, show the multiple start and end dates Or Recurring= Start and end dates Char Yes Start and end dates if one time or report or recurring type		customer			List of IDACs if
Number_Dialed			Char	NO	selected.
Number_Dialed= Number dialed Char Range= Ranges selected by customer Usage= Usages selected by customer Scheduling_Infor mation= Or Recurring= Or Dates= Start and end dates if one time report or	ID/Accounting_C	IDACS SCIORES			soo number(s)
Number_Dialed Number dialed No List of tanged	odes=		Char	No	800 Hamber (6)
Ranges selected by customer Usages Usages selected by customer Scheduling_Infor mation= One_Time= Or Recurring= Or Recurring= Start and end dates Start and end dates if one time report or	Number_Dialed=	Number dialed		No	List of ranges
Usage= Usages selected by customer Scheduling_Infor mation= Schedule type selected by customer Or Recurring= Or Start and end dates if one time report or Start and end time or recurring type Or Recurring= Start and end cates if one time report or Schedule type Schedule type selected by customer Start and end dates if one time or recurring type		Ranges selected	Cital		
Scheduling_Infor mation=	11.2.13	by customer		No	List of usages
Scheduling_Infor mation= One_Time= Or Recurring= Dates= Start and end dates if one time report or Scheduling line Scheduling line No values will be displayed with this If recurring no values will be displayed with this. If one time, show the multiple start and end dates if one time report or No values will be displayed with this. If one values will be displayed with this. If one time, show the multiple start and end dates if one time or recurring type	Ucage=	Usages selected	d Char	1.13	
Scheduling_Infor mation= One_Time= Or Recurring= Start and end dates if one time Schedule line Char Yes If recurring no values will be displayed with this. If one time, show the multiple start and end dates if one time Char Yes Schedule type Selected by Customer Char Yes Start and end dates if one time or recurring type	Usage-	by customer			No values will
mation= One_Time= Or Recurring= Dates= Schedule type selected by customer Schedule type selected by customer Char Yes Ves If recurring no values will be displayed with this. If one time, show the multiple start and end dates Char Yes Start and end dates Start and end dates if one time report or Ves Start and end recurring type	Cahaduling Info				be displayed
One_Time= Or Schedule type selected by customer Recurring= Dates= Schedule type selected by customer Char Yes If recurring no values will be displayed with this. If one time, show the multiple start and end dates Char Yes Start and end dates if one time report or recurring type	Scheduling_IIIIO	`			with this
One_Time= Or Recurring= Schedule type selected by customer Char Char Values will be displayed with this. If one time, show the multiple start and end dates Start and end dates if one time report or Char Yes Start and end dates if one time or recurring type	mation=				If recurring no
Or Recurring= Selected by customer Selecte		Schedule type	Char	Yes	values will be
Or Recurring= Customer Customer this. If one time, show the multiple start and end dates Dates= Start and end dates if one time report or Char Yes Start and end dates if one time or recurring type	One_Time=	calacted by	1		displayed with
Recurring= Customer time, show the multiple start and end dates	Or	Selected by		Į	this If one
Dates= Start and end dates Char Yes Start and end dates if one time report or The port of the dates in the dates if one time or the dates if one time time or recurring type	* 1.	Customer		}	time show the
Dates= Start and end dates Char Yes Start and end dates if one time report or recurring type	Recurring=	1	1	1	multiple etart
Dates= Start and end dates if one time report or Start and end dates if one time time or recurring type	, i				multiple start
Dates= Start and end dates if one time dates if one time report or recurring type					and end dates
Dates= Start and end dates if one time time or report or recurring type	1		Char	Yes	Start and end
dates if one time time or recurring type	Dates=	Start and end		1	dates if one
report or recurring type if	Daios	dates if one tir	ne		time or
requiring type if		report or	}		recurring type it
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		recurring type	if \	Ì	recurring
recurring		recurring			

T'	Time zone	Char	Yes	Time zone –
Time_zone=	Time zone	Orial		either default
				or overridden
				value (MST)
1 000-	Indicates the	Char(4)	No	Default will be
Lang=	language a user	J		American
	picked.		1 1	English, the
	picked.			values are not
				defined.
	Indicates the	Char(4)	No	Default will be
Curr=	language a user	J.i.a. (1)		American
	picked		1 1	Dollar, the
	picked			values are not
			1	defined.
DEENILT COA	Default graph	Char (1)	Yes	0 = None, 1 =
DEFAULT_GRA	mode	Onar (1)		Graph, 2 = Plot
PH_MODE=	Default graph	Char (1)	Yes	0 = None, 1 =
DEFAULT_GRA		Onar (1)		Bar, 2 = Line, 3
PH_TYPE=	type			= Pie, 4 = Point
DEEDIE V AVIC	Define default x	Char (1)	Yes	0 = No, 1 = Yes
DEFINE_X_AXIS	axix	0.1.2. (1)		
X AXIS_COLUM	X axis column	Char	lf .	X axis column
N=	A axis coldiiii		define_x_	ID
14-	1		axis is	
			Yes	
DEFAULT_Y_C	Default Y column	Char	No	List of column
OLUMN=				IDs for y axis
COLUMN_DISP	Column display	Char	Yes	List of column
LAY_ORDER=	order			IDs to display
EXT_ONDE		İ		in a particular
				order
COLUMN_STOR	Column stored	Char	Yes	Order columns
ED_ORDER	order			are in default
ED_ONDEN	0,00			template
SORT_ALLOWE	Sort allowed on	Char (1)	Yes	0 = No, 1 = Yes
D D	viewer			<u> </u>
PRESORTED	Presorted by	Char (1)	Yes	0 = No, 1 = Yes
THEODITIES	fulfilling server			
TOTALMODE=	Total mode	Char (1)	Yes	0 = None, 1 =
1.0				subtotal, 2 =
				total, 3 = both
SUBTOTCOL=	Subtotal columns	Char	Yes if	List of column
302.3.33			TOTALM	IDs
			OD is 1 or	
			3	0 = No, 1 =
SELECTED_SE	Pick list on a	Char (1)	Yes	0 = No, 1 = Yes. If Yes,
CTION=	certain column			SUBTOTCOL
		1		
				must contain
				information
METACOLUMN	= Delimiter		L	

META_COLUMN	Column ID	Char	Yes	Column ID
ID=		Char	Yes	Column header
COLUMN_LABE	Column header			Indicates the
_= DATATYPE=	Data type	Char	Yes	way the data is received from fulfilling server. S = string, C = character, I = integer, N = number, D = double, L = long
DECIMAL=	Decimal point	Char	No	decimal points 0 = No, 1 = Yes
HIDEABLE=	Column can be hidden on viewer	Char (1)	Yes	$0 = N_0, 1 = Y_{es}$
GRAPHABLE=	Column can be graphed on	Char (1)	Yes	
WIDTH=	Default column	Char	Yes	Default column display width
CALCULATE=	display width Determines if viewer should calculate the	Char (1)	Yes	0 = No, 1 = Yes
CALCULATE_E XPRESSION=	column	Char	If CALCULA TE is Yes	

APPENDIX G

Message	Name	Type		
	Request	Char (1)	Yes	D = Delete
INBOXID=	Unique Inbox ID	Char(10)	Yes	ID assigned by Inboto to uniquely identify the item to be deleted

Delete Acknowledgment

llessage::"	Parameter Name	Param Type=	Hequire	dz i Acceptanies alde
7	Response	Char (1)	Yes	Z
REQ=	Request which is being acknowledged	Char (1)	Yes	D
RROR=	Error Code	Char(4)	Yes	0 = no error, else error code

Delete All Items

Message :		¹¹ Param: Type≟	Require	di Acceptable:Value
	Request	Char (1)	Yes	D = Delete
UCEDID-	User ID	Char (20)	Yes	User ID
USERID=	Enterprise ID	Char (8)	Yes	Enterprise ID
ENTPID=	Enterprise ID	(C), (C)		

Delete Acknowledgment

Message	Parameter	Param Type≟	Require	das Acceptable value
7	Response	Char (1)	Yes	Z
REQ=	Request which is being acknowledged	Char (1)	Yes	D
ERROR=	Error Code	Char(4)	Yes	0 = no error, else error code

List Message:	Parameter	Param:	Required	-Acceptable:Values
	Name: Request	Char (1)	Yes	L = List
ENTEDID=	Enterprise ID	Char (8)	Yes	Enterprise ID
USERID=	User ID owning item	Char (20)	Yes	As assigned by StarOE
CATEGORY	Inbox item category to return	Char (1)	Yes	R = Report, D - Call Detail, F = News
INBOXID=	Latest Inbox ID in Inbox	Char (25)	No	Inbox Id to return entries later than

ist Acknowled Message	Parameter	Param_: Type:	Required	Acceptable Value
7	Response	Char (1)	Yes	Z
REQ=	Request which is being acknowledged	Char (1)	Yes	L
ERROR=	Error Code	Char(4)	Yes	0 – no error, else error code
INBOXID	Latest Inbox ID requested	Char (25)	No	Supplied Inbox ID on request
TTL=	Time to Live	Char (3)	No	"Time to live" in days — before automatically purged from dbf. Default is 45 days.
	data	Char	No	see format below

Fetch =Message==================================	Parameter.	' Param⊆ Tvoe	Require	d⊯ Acceptable₂Value
F INBOXID=	Request ID assigned by Inbox to uniquely identify the item to be located	Char (1) Char	Yes Yes	F = Fetch

lessage:	Parameter Name ≈	Param Type	Required	Acceptable:Value:
J	Operation flag – update request	Char (1)	Yes	U = Update
TUTOID-	Enterprise ID	Char (8)	Yes	Enterprise ID
NTPID= JSERID=	User ID owning	Char (20)	Yes	As assigned by StarOE
NBOXID=	Inbox unique ID	Char ()	Yes	ID assigned by Inboto to uniquely identify the item to be located
TTL=	Time to Live	Char (3)	No	"Time to live" in days - before automatically purged from dbf. Default is 45 days.
ACK=	Acknowledge item	Char (1)	No	0 = not acknowledged
				1 = acknowledge item (default)

Jpdate Ackno Message	Parameter	Param: Type:	Require	d: Acceptable value
7	Request	Char (1)	Yes	Z
REQ=	Request which is being acknowledged	Char (1)	Yes	U
ERROR=	Error Code	Long	Yes	0 – no error, else error code

APPENDIX II

Access_Type		Nulls	Dalinition	Range or example
Column Hamo	Туро	no	Unique generated	
ccess_typo_koy	smallint		key	DIAL-10
unique_access_valu e	char(20)	yas	Unique string value of access type (mandated by use of At DecisionSuite)	DIAC-10
lovel	smallint	no	Mochanism to (constrain parent, child, attributo rolationships & provide for filtering (mandated by use of Al DocisionSuite)	
accoss_code	char(2)	no	Indicator for a particular access mothod	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, A, B, C, D,
access_value	char(40)	yes	String value of Accoss	SHARED, DIAL- 1,CARD, DEDICATED ACCESS, 800 REMOTE ACCESS, DIRECT DIAL FAX CALLS, STORE/FORWARD FAX CALL, CELLUILAR, LOCAL, 800 BUSINESS LINE, 800 DEDICATED LINE or 800 INTERSWITCH NETWORK CALL REDIRECT/DTO
av_long_dasc	char(50)	yos	A long textual description of the access type	Not currently populated
Lavel	Smallint	no	Machanism to (constrain parent, child, attribute relationships & provide for filtering (mandated by uso o Al DecisionSuito)	I.e access vacultue
In_out	char(1)	no	Indicator specifying II Call was inbound or oulbound	1 or O

Column Hama	Type	Nulls	Definition	Range or example value
billing_corp_koy	serial	no .	Generated key	
entp_corp_bill_serv	char(35)	no	Concatination of entorpriso_id, corporato_kl, billing_id & servico_loc_kl	00000001_9999999 9_Y0000001_N0000 001
level	smallint	no	Mochanism to (constrain parent, child, attributo rolationships & provide for filtering (mandated by use of Al DecisionSuite)	
enterprise_ld	char(0)	no	MCI Identifier of a grouping of Corp Ids	00000001
corporate_ld	char(8)	no	MCI Identifier for Customer	99999999
billing_id	char(8)	yos	MCI identifier for Invoice recipient	Y0000001
sorvicn_loc_ld	char(8)	yes .	MCI Identifier for physical location of a subscribed service	N0000001
enterpriso_name	char(30)	yes	Customar name associated with Enterpriso_ki	
corporate_name	char(30)	yes	Customor name associated with com_ld	
billing_name	char(30)	yes	Customer name associated with billing_ld	
serv_loc_name	char(30)	yes	Customer name associated with service_loc_td	
sorv_corp_name	char(10)	yes	Company "owning" the customer (i.e MCI)	

8xx

Column Hame	Туро	Nulls	Dafinition	Range or example value
8xx_kny	Surial	no	Generated key	
0xx	char(10)	no	800 or 888 number dialed for inbound services	8007243624

8xx Column Hamo	Туре	Nulls	Definition	Range or example value
lavel	Smallint	no	Mechanism to (constrain parent, child, attribute relationships & provide for filtering (mandated by use of At DecisionSuito)	

Card Column Hame	Туро	Nulls	Definition	Nango or example value
Communication of the Communica			Generated key	
card_koy	serial	no	800 or 888 number	8007243624
card_number	char(16)		dialed for inbound services	
lovel	smallint	no	Mechanism to (constrain parent, child, attribute relationships & provide for filtering (mandated by use of At DecisionSuite)	
starcard_code	char(1)	yes	Identifies as star card & type of star card feature	
Translation	char(30)	yes	Customer defined translation of card_number for reporting purposes	

Idacc		Nulls	Dofinition	Range or example
Column Hamo	Type	Hums		valuo
		no	Gonoratod key	
klacc_key	Integer		A unique idcode or	Concatenated
Idacc_description	char()	no	Accounting code	corp_id idacc combination
lovel		no	Mochanism to (constrain parent, child, attribute rotationships & provide for filtering (mandated by use of Al DecisionSulte)	
	-land (16)	yes	Id/Accounting code	MARKETING
Idacc	char(16)			

Data_Stroam

Column Hamo	Туре	Nulls	Definition	Rango or example value
lina <u>i</u> spaed	char(5)	no	A unique value for line speed	
leval .	smallint	no	Mechanism to (constrain parent, child, attribute relationships & provide for filtering (mandated by use of At DecisionSuite)	

Pay_phone Column Hamo	Туре	Nulls	Definition	Nange or example . value
pay_phone_cd	Char(1)	no	Indicator specifying a payphone call	P or blank
pay_phone_descript	Char(8)	no	A unique value for line speed	Payphone or blanks
level	Smallint	no	Mechanism to (constrain parent, child, altribute relationships & provide for filtering (mandated by use of Al DecisionSulte)	

Column Hame	Туро	Hulla	Dollnition	Range or example value
limo_koy	serial	no	Unique generated key	1
time_description	char(30)	no	A unique description of a time value	Thursday, January 1, 1998 00:01
current_Ind	char(1)	no	Denotes if data for time period has been loaded in the fact table(s)	Y or N
Resolution	char(12)	по	Hierarchy level with In the time dimesion	Year, month, week, day of month, day of week, hour, minute
Saquenca	smallint	no	Denotes relative order within resoltion	A numeral value beginning @ 1
soq_in_year	smallint	no	Denotes relativo order within year	
Yoar	char(5)	по	A year	l.o.1998
Month	char(9)	no	A month	I.e. January

Column Hame	Type	Mulls	Definition	Range or example value
Committee			The week of a year	1 thru 54
Waok	smallint	no	Division of week	1, 2, 3, 4, 7, 8 or 9
Rato	char(1)	no.	Into periods for which differing tarrifed rates may be applied	
day_ol_month	smallini	No	The numeric day of the month	f.c. 1
day_ol_week	char(9)	No	The string value for a day	Thursday
		No	24 hour clock time	00 thru 23
Hour	samilint		The numeric minute	00 thru 59
Minuto	smallint	No	valuo	
datetime	date year to minute	No	Date time stamp	

Column Hamo	Туро	Nulls	. Definition	Range or examp value
product_key	char(4)	no	Indicator specifying Invoicing system	0010, 0011, 0015 Or 0018
and a new o	char(30)	no	Involcing system	Vnet
product_name	smallint	no	Mechanism to (constrain parent, child, attributo rolationships & provide for filtering (mandatod by use of At DocisionSuite)	
product_abv	char(1)	no	Abraviation of produst code	V, S, T or C

. Orla Geo & Term Geo & Roport Geo

Column Hame	Туро	Mulls	Dofinition	Range or example value
goo_key	smallint	no	Generated_key	
geo_description	char()	no	Unique description	
loval	smallint	no	Mechanism to (constrain parent, child, attribute relationships & provide for filtering (mandated by use of At DecisionSulta)	
country_cd	char(3)	yes	Indicator specifying a country	001 for USA

Orlg_Geo & Term_6 Column Hamo	Турс	Nulls	Dofinition	Range or example value
npa	char(3)	yos	Geographical division in the North America Numbering Plan Area	719 for Southorn Colorado
nxx	char(3)	yes	Three digit location code of the sevendigit network number used in dlaling. N is any digit between 2 & 9 and X is any digit between 0 & 9	535
routing_cd	smallint	Yes	Used by some countries to subdivide their country code	1232 for Bellast
trunk	char(4)	yes	MCI switch trunk group	
switch	char(4)	yes	MCI switch	
clty_name	char(10)	yes	A city's name	
state_cd	char(2)	yes	Two character code for state	co
country_name _	char(30)	yos	A country's name	

Usago

Column Name	Тура	tlulls	Dollnition	Range or example value
นรถดูด_koy	Smallint	no	Generated key	
use_cd	Char(1)	No	Indicator of geographic attributes of a call would which determine the type of tarilf that should applied	1, 2, 3, 4, 5, 6, or 7
Uso_dosc	Char(20)	No .	Unique description of use cd	INTERSTATE, INTRASTATE, INTERNATIONAL, INTRASTATE- INTRALATA, INTRACITY-INTL, INNTRALATA, 800 INTL-INBOUND

Usago	Typa	Nulls	Definition	Range or example value
Column Hamo Subusago	Char(1)	No .	Indicator of geographic characteristics which when combined with a usage code can further affect the type of tariffs applied	1, 2, 3, 4, 5, 6, 7, 9, Λ, Β, C, G or L
Subusage desc	Char(20)	No	Unique description of subusage	CANADIAN. TERRITORIAL. MEXICO-DOM, OMNET- OMNICALL. OFFNET- OMNICALL. MEXICO- BOURDER, CARRIBEAN, PROMO, ALASKA, HAWAII, PUERTO RICO, VIRGIN ISLANDS, GUAM, LOCALNET
Lavol	Smallint	No	Mechanism to (constrain parent, child, attribute relationships & provide for filtering (mandated by use of Al DecisionSuite)	

EVS_Product		Nulls	Dollnition	Range or example value
Column Hamo	Туре			30, 31, 32, 33, 34,
EVS_Product_cd	Char(3)	No	Indicator specifying special features of Inhound calls utilizing an EVS(Enhanced Voice Services) product	35, 36, 37, 30, 39, 40, 41or blank
EVS_product_desc	Char(20)	no	Unique description of EVS_product_cd	
Lovel	smallint	no	Machanism to (constrain parent, child, attribute relationships & provide for filtering (mandated by use of Al DecisionSuito)	

DI	reci	lory	្នក១នា	lst

Directory_nasist	Typo	Mulla	Definition	Nango or example value
Column Hame Directory_assist	Char(1)	No	Ind specifying if call was directory	Y or N
Dir_assist_desc	Char(20)	No	unique description of Directory_nssist	DIRECTORY ASSIST OR NOT DIR ASSIST
Lovel	Smallint	No	Mechanism to (constrain parent, child, attributo relationships & provide for filtering (mandated by use of Al DecisionSulte)	

Rango Column Hama	Тура	Hulls	Dollnition	Nango or example value
Range	Char(1)	No	Indicator specifying band for distance sensitive pricing	1, 2, 3, 4, 5, 6, 7, 8 or 9
Range_desc	Char(20)	No	Unique description of Range	
Level	Smallint	No ,	Mechanism to (constrain parent, child, attribute rotationships & provide for filtering (mandated by use of Al DecisionSuite)	

HCR

Column Harne	Туро	Nulls	Dofinition	Rango or example yalue
ncr_ind	char(1)	no	Notwork Call Redirect Indicator specifies if call was redirect because terminating switch is blocking	Blank, 1, 2, 3, 4, 5, A, B,
ncr_ind_desc	char(20)	no	Unique description of ner_ind	NON NCR/DTO. HOP1, HOP2, HOP3, HOP4, HOP5, INTERSWITCH DTO OR INTRASWITCH DTO

Column Harna	Туро	no .	Mochanism to (constrain parent,	Range or example value
Level	smallinl	•	child, attribute relationships & provide for filtering (mandated by use of At DecisionSuite)	

Cell_phone	Time	Nulln	Definition .	Nange or example value
Column Namo	Type			H, R, A, F, 1, 2, 3,
cell_phone_cd	Char(1)	no	Identifies call as collular & type of collular call	4. 5 or 6
cell_phona_desc	Char(20)	no	Unique description of cell_phone_desc	HOME, ROAMED CALL, FORWARDED CALL, AIRTIME, TOLL, ROAMERAIR, ROAMER TOLL, ROAMERDAILY SURCHARGE OR LANDLINE TERMINATION
laval	Smallint	no	Mochanism to (constrain parent, child, attribute relationships & provide for filtering (mandated by use of At DecisionSuite)	

vos		Hulls	Dofinition	Range or example value
Column Name	Туро			Vande
	smallint	no		P, S, E or blank
vos_key	char(1)	no	Voice Operator Services Indicator	
vos_cd			Unique description	PER TO PER, STN
vos_cd_dosc	char(20)	μο	of vos_cd	TO STN, ECR 2000F OR NOT OPSVC
vos_dotail	char(1)	no	Additional attributes of Voice Operator Services call	A, R, S, B, H, O, C, D, P, Q & E
vos_dnatil_dosc	char(20)	no	Unique description of Vos dotail	

Column Hame	Туро	Nulls	Dofinition	flange or example value
Lovel	smallint	no	Mechanism to (constrain parent, child, attribute relationships & provide for filtering (mandated by use of Al DecisionSulte)	

Conf call

Cont_call Column Hame	Туре	Nulls	Oofinition	Rango or example value
conf_call_ld	char(1)	no		
conf_call_desc	char(20)	no	Unique description of	
tovel	smallint	no	Mochanism to (constrain parent, child, attributo relationships & provide for filtering (mandated by use of At DecisionSulte)	

Table 7-1 Cross com

Column Hamo	Туро	Hulla	Dofinition	Rango or example value
cross_com_Ind	char(1)	no		
cross_corp_desc	char(20)	ло		
lovel	smallint	no	Mochanism to (constrain parent, child, attribute relationships & provide for filtering (mandated by use of Al DocisionSufte)	ń

Currency

Column Hamo	Туре	Nulls	Dofinition	Range or example value
currancy_cd	char(3)	no	Specifies the type of currency the call is involced in	USA ~
currency_desc	char(20)	no	Unique description of curency_cd	

Currency		Mulls	Doffoltion	Range or example
Column Namo	Type	Nulls -	Mechanism to (constrain parent,	valuo
			child, attribute relationships & provide for filtering (mandated by use of At DecisionSuite)	

Column Hamo	Туро	Nulls	Definition	Range or example value
nct_id	char()	no	Natwork Call Transfor	
nct_dosc		no	Unique description of NcLld	
lovel	smallint	no	Mochanism to (constrain paront, child, attribute rolationships & provide for filtering (mandated by use of At DecisionSulte)	

Column Hamo	Туре	Nulls	Oafinition	Rango or example
	char(2)	no	Indicator specifying	11, 12, 21 or 22
axs_term_cd	i_cci char(2)		Either shared or dedicated	
access_term_value	char(4)	yes	Unique string value of access type (mandated by use of AI DecisionSuite)	S->S, S->D, D->S or D->D
lavel .	Smallint	no	Mochanism to (constrain parent, child, attribute relationships & provide for filtering (mandated by use of At DecisionSuite)	

Duration_Range

Duration_Hange		Nulis	Dofinition	Range or example	
Low_and	Typo Docimal(7,1)		The low and of a range of duration values	0.0	j

Duration_Range

Duration_Range		Nulls	Definition	Rango or oxamplo
Column Haine High_end	Decimal(7,1)	no	The low end of a range of duration values	0.1
D. Malue	Char(20)		Unique string value	0.0 to 0.1
Rango_Valuo levol	smallint	no	Mechanism to (constrain parent, child, attribute retationships & provide for filtering (mandated by use of Al DecisionSulte)	

Amount Range

Amount_Range	Турв	Nulls	DalinItlan	Range or example
Column Hama	Money(7,2)	no	The low end of a range of amount values	0.00
High_ond	Money(7,2)	no	The low end of a range of amount values	0.10
Danza Value	Char(20)		Uniquo string valuo	0.00 to 0.10
Rango_Value level	smallint	no	Mochanism to (constrain parent, child, attribute, relationships & provide for filtering (mandated by use of Al DecisionSulte)	

perspective base

Column Hame	Туро	Mulls	Dofinition	Rango or examplo value
hilling_corp_kay	integer	no	Foreign key to Billing_corp table	
gmi_kay -	Integer	no	Foreign key to GMT table	
lst_køy	Integer	no	Foreign key to LST table	
bloqrict_koA	char(3)	no	Foreign key to Service table	
access_type_key	smallint	no	Foreign key to Access table	
orig_goo_koy	Integer	no	Foriegn_key into Orig_geo table	
raport_geo_key	Integer	no	Foriegn_key Into report_geo table	
term_geo_koy	Integer	·no	Foriegn_kay Into term_gen table	

Column Hamo	Туро	Nulls	Dathitlon	Rango or example
Commutation	.,,,,		Foreign key to 8xx	
lxx_kay	Integer	nó	table	
daac_koy	Integer	no	Foreign key to idacc table	
card_key	Integer	no	Foreign key to card table	
vos_key	Integer	no	Foreign key to vos table	
usage_koy	Integer	no	Foreign key to usage table	
pay_phono_cd	char(1)	no	Foreign key to payphone table	
llno_speed	char(5)	no	A unique value for line speed	
dialed_number	char(10)	yas	Number dialed at point of origination	8007243624
term_numbor	char(10)	yes	Number where call terminated	2124786783
orlg_number	char(10)	yes	Number where call originated	7195355180
roport_number	char(10)	yes	Number which will appear on report call	7195355100
evs_product_cd	char(3)	yes	Indicator specifying special features of inbound calls utilizing an EVS (Enhanced Voice Services) product	30, 31, 32, 33, 34, 35, 36, 37, 30, 39, 40 or 41
pricing mathod	char(1)	yos	Indicator specifying pricing method of special features of inbound calls	Y, D, C, B
product_time	datatima hour to sand	yes	Indentifies time the usage of EVS (Enhanced Voice Services) product began	
directory_assist	char(1)	yes	Indicator specifying if call was directory assistance	YorN
าลกฎง	char(1)	yos	Indicator specifying bard for distance sensitive pricing	1, 2, 3, 4, 5, 6, 7, 8 or 9

PCT/US98/20148 WO 99/16207

Column Hamo	Туро	Nulla	Dafinition	. Range or example Value
ncr_ind	char(1)	yos	Network Cnll Rodirect Indicator specifies If call was redirect because terminating switch is blocking	1, 2, 3, 4, 5, A, B
cell_phone_cd	char(1)	yes	Identifies call as cellular & type of cellular call	R, H or F
cont_call_ld	char(1)	yes	Indicator specifying type of conference call	A, FI, S, B, N, O, C, D, P, Q or E
cross_corp_ind	char(1)	yes	Indicator specifying if the 8xx number terminated at a com_id that will be involced for the call but does not own the 8xx number	O, T or L
non_cross_com_ld	char(8)	yes	Corp Id of Customer owning an 8xx number but which will not be invoiced for the call	99111111
enhanco_call_rto	char(1)	yes	Indicator specifying the type of Enhanced Call Routing Feature or Annswernet feature	
reallimo_ani	char(1)	yes	Indicator specifying Roal Timo Automated Numbering Indicator	
nct_id	char()		Indicator which groups logs of a Notwork Call Transfor (NCT) call	·
nct_call_log	char(1)		The leg of a Network Call Transfer (NCT) call	1,2 or 3
duration	decimal(7,1)	yes	Call time in minutes of a call	0 thru 9999999.9
currency_cd	char(3)	yes	Indicator specifying the type of currency used to price the call	I.e. USA
amount	money(7,2)	yes	Price of call Inclusive of all applicable surcharges	0 thru 9999999.99

Column Hame	Typo	Nulls	Dollnlilon	Rango or example value
nosurcharge_amt	rnonoy(7,2)	yes	Price of call Inclusive of discounts but excluding surcharges & taxes	0 thru 9999999.99
		yas	Tax applied to call	0 thru 9999999.99
lax ncr_surchargo	money(7,2)	yos	Amount of surcharge applied to NCR call	0 thru 9999999.99
Intl_surcharge	money(7,2)	yos	Amount of surcharge applied to call if it is international	0 thru 9999999.99
realtime_anl_surcha	money(7,2)-	yos	Amount of surchargo applied for realitime ani	0 thru 9999999.99
payphone_surcharg	monay(7,2)	yes	Amount of surcharpo applied for a call originating at a payphone	0 thru 9999999.99
product_duration	docimal(7,1)	yos	Duration of Toll Froo call on special platforms (i.e. EVS)	0 thru 9999999.9
productusago	decimal(7,2)	yos	Price of Toll Free call Incurred due to special platforms (I.e. EVS)	0 thni 9999999.99
axs-term-Ind	char(2)	yes	Access & termination Indicator, specifies If call was shared or dedicated	11, 12, 21 or 22
bill_period	smallint	no	The period the call is involced in	0197
axs_term_cd	char(2)	no	Indicator specifying Either shared or dedicated	11, 12, 21 or 22

APPENDIX I

```
The data types are as follows:
char = character
varchar = character
integer = integer
smallint = integer
Column ID Table
Standard column.
columnid
     colid integer,
                                   37
     ia_name varchar(40),
                                   Total Amt
     1a_md_name varchar(40),
                                   C33C::Total Amt
     rptmgr_name varchar(40),
                                   Tot Amt
     format_columns char(1),
                                   N
     rpttype char(1),
                                   В
     fact_dim_flag char(1),
subtotalflag char(1),-_
                                   F
                                   Y
     tranflag char(1).
                                   N
     equation varchar(200),
     reflag char(1),
    numflag char(1),
    list_disp_alias char(40)
Derived Column
columnid
    colid integer.
                                   61
     ia_name varchar(40),
                                   % Min
    ia_md_name varchar(40),
                                   C5C:: % Min
    rptmgr_name varchar(40),
format_columns char(1),
                                   % Min
    rpttype char (1),
    fact_dim_flag char(1),
subtotalflag char(1),
                                   F
                                   Ħ
    tranflag char(1), equation varchar(200),
                                   ( C36 / CT36 ) * 100
    reflag char(1),
    numflag char(1),
    list_disp_alias char(40)
```

```
colid
                        Column 'Identifier
                        Used by Decision Suite Used by Decision Suite.
ia_name
ia_md_name
rptmagr_name
                        The name by which report manager recognizes the column. Not
                        used by ODS
                        Possible Values: 'Y' = yes, 'N' = No
'Y' = invoke the equation. 'N' = Do not invoke the equation.
Possible Values: 'I' = Inbound, 'O' = Outbound, 'B' = Both.
format_columns
rpttype
                        This indicates if the report is for inbound or outbound calls.
                        or both.
fact_dim_flag
                         Possible values 'F' = Fact, 'D' = Dimension
                        This refers to the type of database table. Possible Values 'Y' = Yes, 'N' = No.
subtotalflag
                        Indicates if subtotaling or totaling is required.
```

```
Possible Values 'Y' = Yes, 'N' = No
                    Indicates if the translation table needs to be referenced.
t-moflag
                   The equation to be invoked, should the format_columns field =
equation
                    Possible Values 'L' = List, 'O' = OLAP.
Indicates if the report is a detail report (List) or a summary
reflag
                    report (OLAP)
                    Possible Valuse 'Y' = Yes, 'N' = No.
                    Indicates if the value is numeric or character.
numflag
                    The name to be displayed on the report. This is only used for
list_disp_alias
                    List reports.
Translation Table
create table "informix".translation
                                 114
    colid smallint.
                                 19
    value. smallint,
                                 International
    tran_literal char(20)
                    The column identifier on which a translation is needed
colid
                    The value in the column
                    The literal value that the 'value' for a particular 'colid'
value
tran_literal
                    gets translated.
Request Table
create table "'rformix".request
     request_id integer,
                                  8855
                                  ARD<ENTPID=00025677, USERID=1234, STDRPTID=101,
     mag_desc char(8192),
                                        USERRPTID=1234, REQUESTID=8855, PRODUCT=S, THRE
                                  SHOLD=<RECCOUNT=300>, COLUMNS<44,36,58,67,61,63,62,64,65,66>,FILTERS=<BILLING=<99920046,,>,,>>,SORTBY
                                  =<44A>, SCHEDULE=A<START=199807300000, END=199807302
                                  359>, TIMEZONE=<LABEL=MDT, OFFSET=6>, TOTALMODE=2, SUE
                                  TOTCOL=<>>|
                                  1044301333
     unique_fname char(10),
                                  /usr/users/axsys/mci/reports
     report_dir char(128),
format_dir char(128),
                                  /usr/users/dss/appl
                                  /inbox/files/odsadm
     inbox_dir char(128),
                                  1044301333.csv_zip
     inbox_fname char(32),
                                  282
     inbox_fsize integer,
                                   00025677
     entpld char(8)
                                   1234
     userid char (20).
                                   101
     stdrptid integer.
                                   1234
     userptid char (10).
     compress char(1),
threshold integer,
                                   300
     subtotal char(32).
     totalmode char(1)
                                   <<36,3491.70><58,236.90><67,588>>
     nrl_totals char(200).
     format_columns char(200), 61,63,62
     sort_columns char(32).
                                   44A
     error_code integer.
     error_desc char(128)
                                   44,36,58,67,61,63,62,64,65,66
     rpmgr_columns char(64)
```

-146-

The unique identifier for the request.

request_id

```
mag_desc This is a copy of the ARD message.unique_fname The unique name assigned to each request. This is assigned to
                        we can keep track of individual requests.
                        It is also assigned to the report returned to the report
                        The location of the report Decision Suite generates. This is
report_dir
                        the tab delimited report file.
                        The location where the report Formatter generates. This is
format_dir
                        the comma delimited file
                        The location on the Inbox (Report Manager) where the report is
inbox_dir
                        gent.
                        The size of the file.
inbox_fsize
                        Enterprise id. An enterprise can consist of one or more
entpid
                        corporate id's
                        An identifier assigned to each user of the system. Identifies each report. Similar to column id's bur on the
userid
stdrptld
                        report level.
userptid'
                        The user-assigned identifier for a report request.
                        Possible Values '1' = yes, '2' = no. Defines if a report is to be compressed, using a standard .zip routine.
compress
                        Defines the number of lines that shall appear on the report.
threshold
                        Not used'
subtotal
totalmode
                        Defines how the report shall be totaled, subtotaled.
                        Possible values '0' = No total, No subtotal; '1' = Only Subtotal; '2' = Only Total; '3' = Total and Subtotal.
                        Formatter totals the columns specified in the .hdr file.
nrl_totals
                        These columns are numeric and have a subtotal flag = 'y' in
                        the column id table.
                        Defines derived columns on which percentages are to be
format_columns
                        calculated.
                        Codes for Parser failure or system failure. If it's a parser failure condition, the code is returned to Report Manager. Error description. Used only for analysis.
error_code
error_desc
rpmgr_columns
                        These are the columns sent to us by Report Manager.
                        checks this list against the list in the .hdr file.
Request Status Table
create table "informix".req_status
   (
     request_id integer,
                                                        010
     status char (20),
                                                        'new_message'
     priority char(1),
     starttime datetime year to second
                                                     1998-09-02 17:04:24
request_id
                        The unique identifier for the request.
                       The unique identifier for the request.

Possivle Vales 'new_message', 'parser_success',

parser_failed', 'In_ARDA', 'ARDA_sent', 'In_IAIO',

'IAIO_complete', 'IAIO_failed',

'in_pre_format', 'pre_format_complete', 'In_formatter',

formatter_complete', 'formatter_failed', 'IN_ftp', 'ftp_success',

'ftp_failed', 'IN_nrl', 'nrl', sent', 'nrl', failed',
status
                        'ftp_failed', 'IN_nrl, 'nrl_sent', 'nrl_failed'
                        Each process updates the request status table as it processes.
Priority
                        Always 'l'. Not used by ODS
starttime
                        The time each process stated work on the request.
```

(

WHAT IS CLAIMED IS:

1. A Web/Internet based reporting system for communicating data information from an enterprise intranet database to a client workstation via an integrated interface, said system comprising:

client browser application located at said client workstation for enabling interactive

said client workstation for enabling interactive Web based communications with said reporting system, said client workstation identified with a customer and providing said integrated interface;

at least one secure server for managing client sessions over the Internet, said secure server supporting a first secure socket connection over a first firewall enabling encrypted communication between said client browser application and said secure server;

report manager server for maintaining an inventory of reporting items associated with a customer and managing the reporting of customerspecific data information in accordance with a customer report request message, said report manager generating a response message including a metadata description of said reporting items included in a report request;

dispatch server for communicating with said secure server through a second firewall over a second socket connection, said first secure and second socket connections forming a secure communications link, said dispatch server enabling forwarding of a report request message to said report manager server; and

operational data storage device for receiving a metadata description of a requested

report from said report manager server and retrieving said customer-specific data from said enterprise intranet database in accordance with said received metadata description;

wherein said retrieved data and said metadata description of said reporting items are utilized to generate a completed report for presentation to said customer via said interface.

- 2. The reporting system as claimed in Claim
 1, further including client report requestor
 application for enabling presentation of a report
 request menu including various reporting options
 for said customer in accordance with predetermined
 customer entitlements, said reporting options
 including creation and customization of said
 reporting items.
- 3. The reporting system as claimed in Claim
 2, wherein said client report requestor
 application further generates said report request
 message in response to user selection of a specific
 report option for communication over said secure
 communications link, for receipt by said report
 manager server.
- 4. The reporting system as claimed in Claim 2, wherein said second operational data storage device for accessing customer-specific data includes a mechanism for formatting said customer-specific data information in accordance with said

ì

metadata description, said customer-specific data being formatted for display at said client workstation via said integrated interface.

- 5. The reporting system as claimed in Claim 2, further including report scheduler server for enabling said operational data storage device to retrieve said customer-specific data at predetermined times in accordance with a reporting schedule.
- 6. The reporting system as claimed in Claim 5, wherein said scheduler server enables said operational data storage device to retrieve said customer-specific data at a customer-specified frequency.
- 7. The reporting system as claimed in Claim 6, wherein said report manager server includes a process for generating requestor applets for communication over said secure communications link to said client workstation, one of said applets capable of presenting said reporting items to a requesting customer via said interface.
- 1 8. The reporting system as claimed in Claim
 2 1, wherein said customer specific data information
 3 relates to priced call detail data representing
 4 usage of a customer's telecommunications network.

l

2

3

4

5

1

2

3

4

5

1

2

3

4

5

6

9. The reporting system as claimed in Claim
1, wherein said enterprise intranet database is
organized as one or more datamart storage devices,
said operational data storage device determining
one or more specific datamart storage devices from
which to access said customer-specific data
information in accordance with a report metadata
description.

- 10. The reporting system as claimed in Claim 9, further including a data harvester device for periodically inputting up-to-date data information into said one or more datamart storage devices.
- 11. The reporting system as claimed in Claim 10, wherein said one or more datamart storage devices is organized according to a star-schema topology to facilitate retrieval of customer-specific data therefrom.
 - 12. The reporting system as claimed in Claim
 1, further including subscribe and publish
 communications interface between said report
 manager server and said operational data storage
 device, said metadata descriptions being translated
 by said report manager server to generate published
 messages for receipt by said operational data
 storage device.
- 13. The reporting system as claimed in Claim 2 1, further including a client report viewer

application for receiving said customer specific data of a requested report and a metadata description of a report type and generating said report for display at said interface.

14. A method for reporting data information from an enterprise intranet database to a client terminal via an integrated interface, said system comprising:

enabling interactive Web based communications between said client terminal identified with a customer and a first secure server over a first secure socket connection, said socket connection enabling encrypted communication between said browser application client and said secure server;

enabling communications between said secure server and a second server over a second socket connection, said first and second sockets forming a secure communications link, said second server enabling forwarding of a report request message and an associated report response message back to said client browser over said secure communications link;

accessing reporting items based on a customer identity and report name from a first database, and generating a response message including a metadata description of said reporting items;

retrieving said customer-specific data
from said enterprise intranet database in
accordance with said metadata description; and,
generating a completed report for said
customer from said metadata description of said
reporting items and said accessed customer-specific
data via said interface.

- 15. The method as claimed in Claim 14, further including the step of presenting a report request menu including various reporting options for said customer in accordance with predetermined customer entitlements, said reporting options including creation and customization of said reporting items.
- 16. The method as claimed in Claim 14, further including the step of generating said report request message in response to user selection of a specific report option for communication over said secure communications link, and communicating a response message over said communications link for display at said client terminal.
- 17. The method as claimed in Claim 15, wherein said step of accessing customer-specific data includes the step of formatting said customer-specific data information in accordance with said metadata description, and storing said customer-specific data information in a database.

1	18. The method as claimed in Claim 17,
า ว	further including the step of enabling retrieval of
2	said customer-specific data at a predetermined time
3	in accordance with a reporting item.
4	in accordance with a reporting room

- 19. The method as claimed in Claim 15, further including periodically enabling retrieval of said customer-specific data.
- 20. The method as claimed in Claim 18, further including generating requester applets for communication over said secure communications link to said client terminal, said applet presenting said reporting items to a requesting customer via said interface.
- 1 21. The method as claimed in Claim 15,
 2 wherein said enterprise intranet database is
 3 organized as one or more datamarts, said method
 4 including determining one or more specific
 5 datamarts from which to access said customer6 specific data information.

1

2

3


1

2

3

4

5

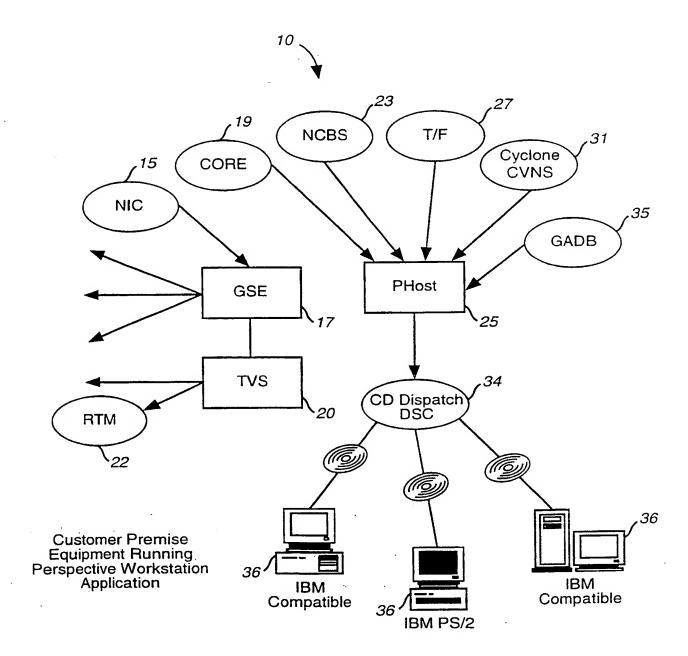

Prior Art

FIG. 1


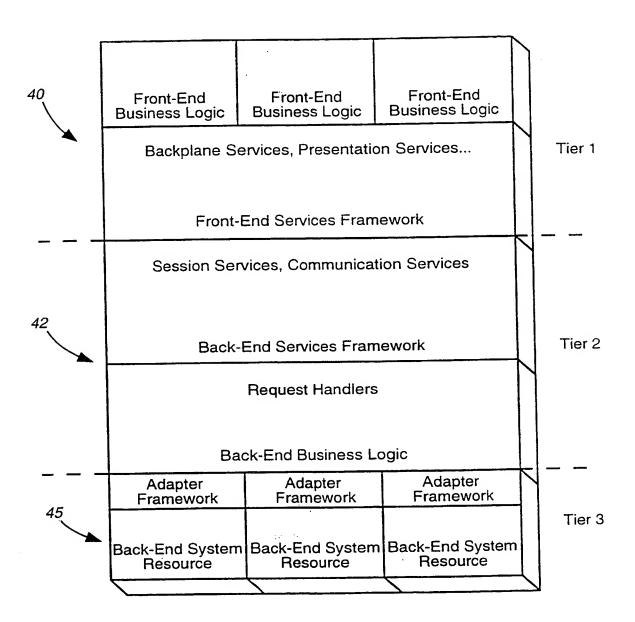


FIG. 2

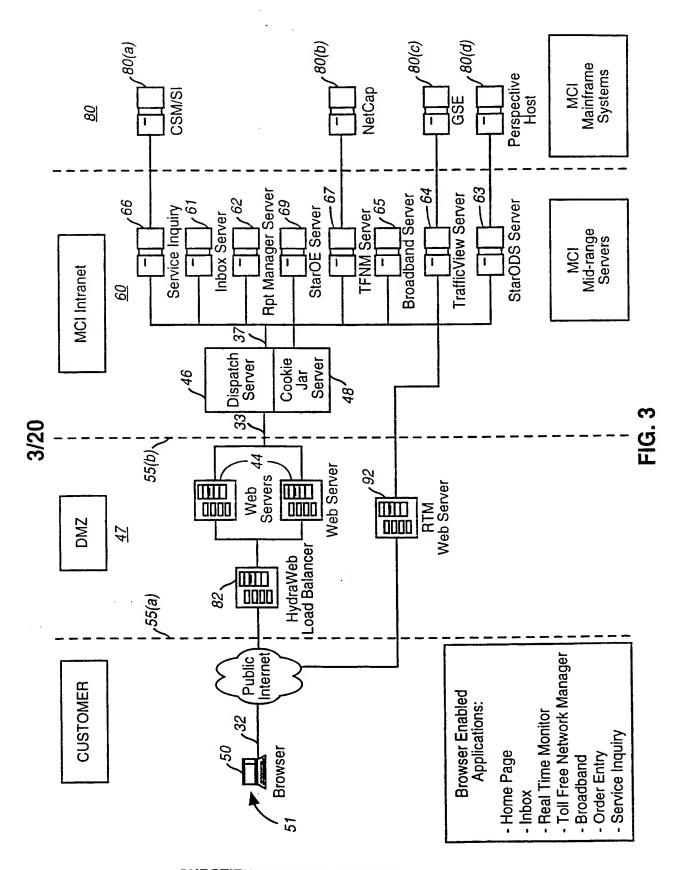

SUBSTITUTE SHEET (RULE 26)

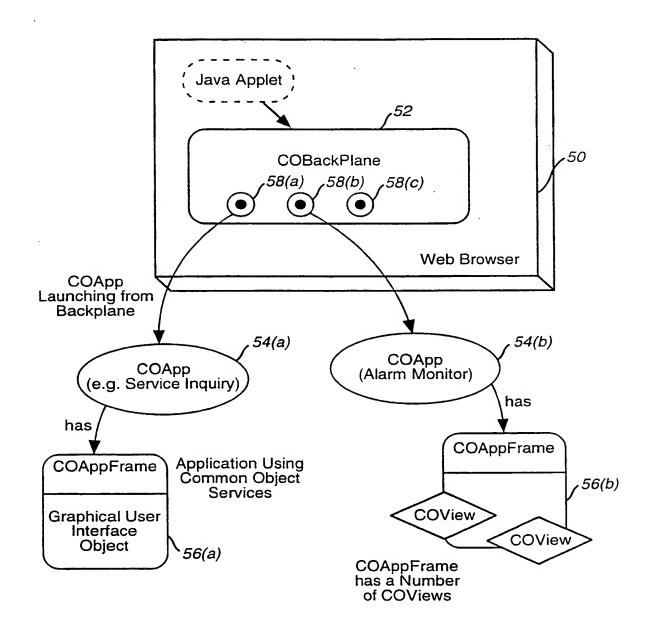


FIG. 4



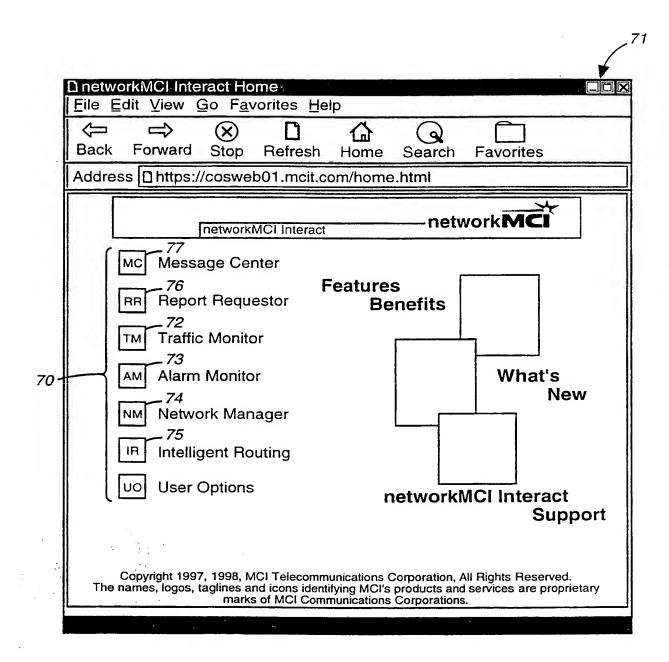


FIG. 5

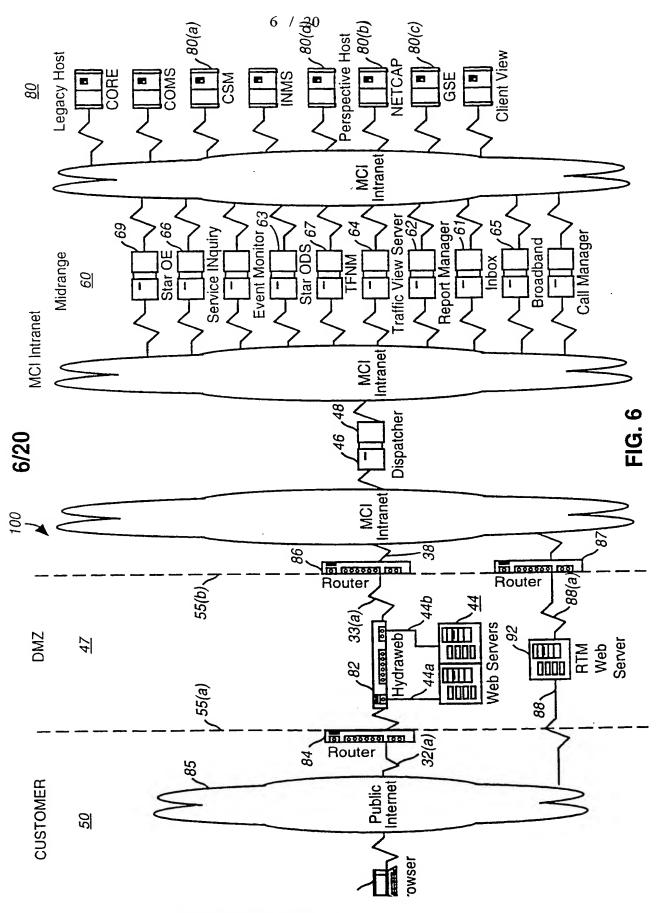

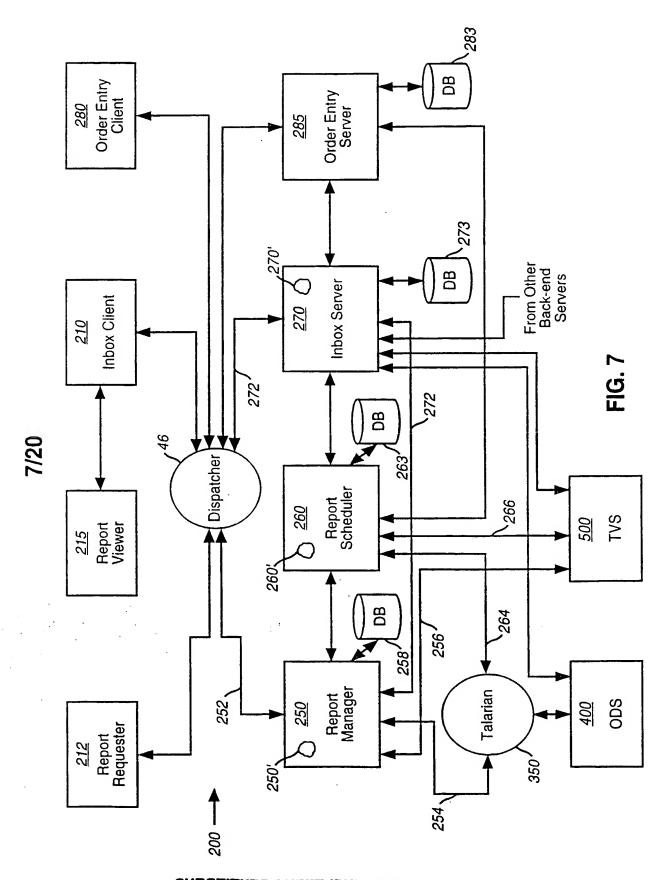

SUBSTITUTE SHEET (RULE 26)

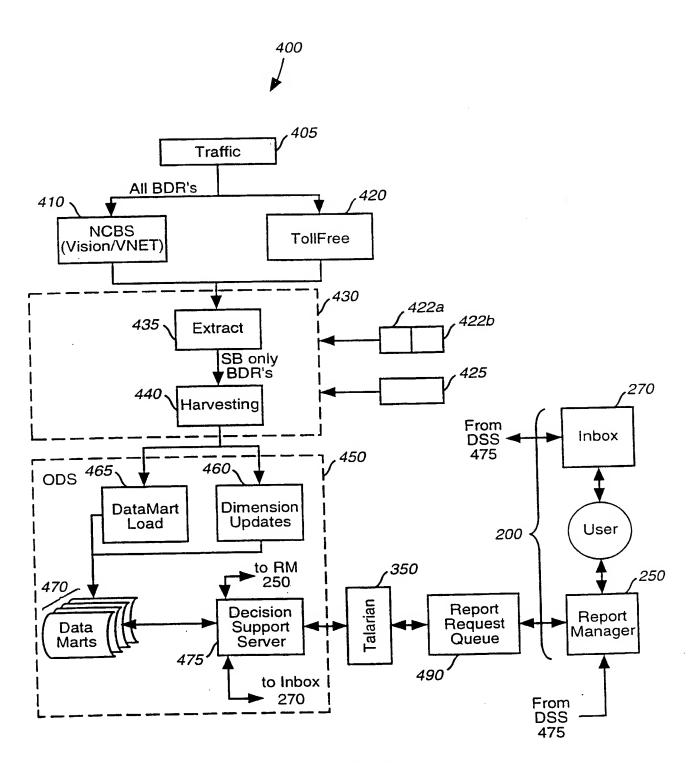


FIG. 8

PCT/US98/20148



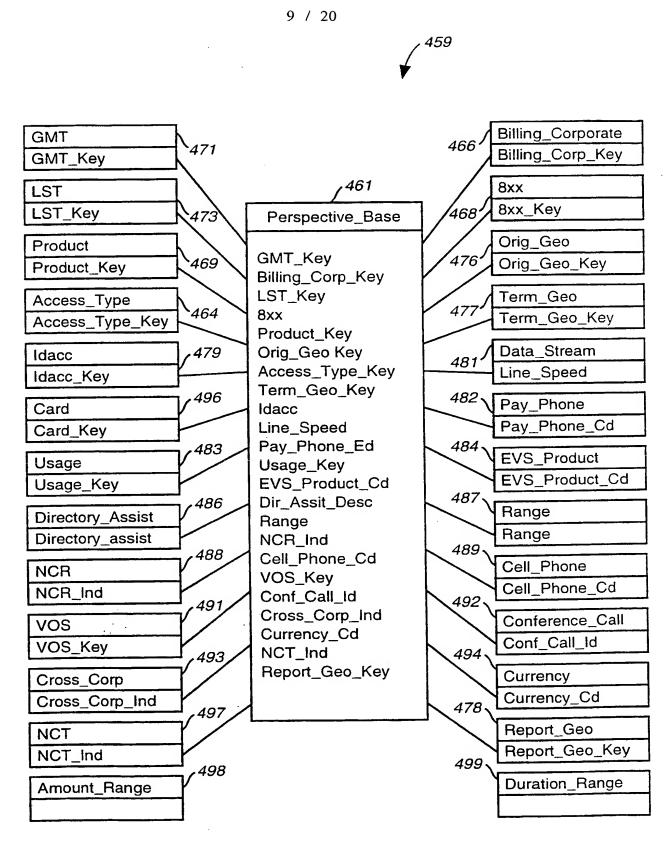


FIG. 9




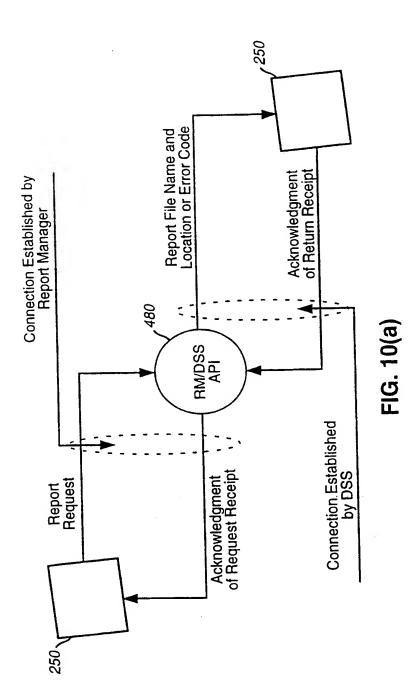

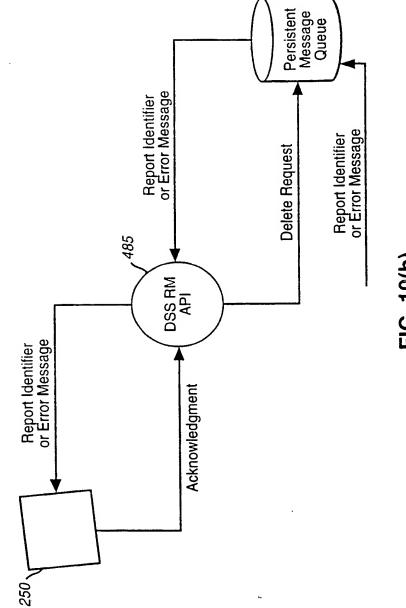



1/20

12 / 20

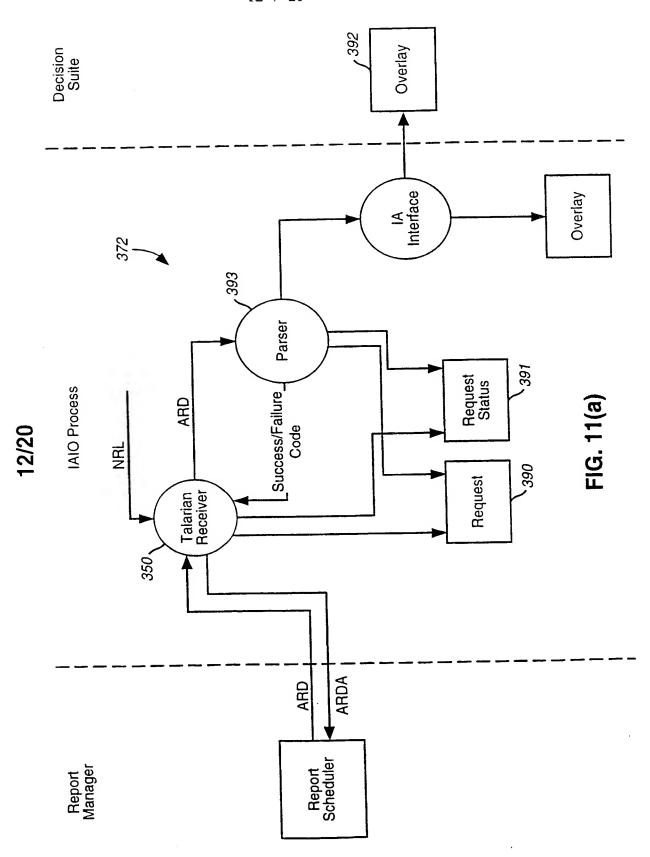


SUBSTITUTE SHEET (RULE 26)

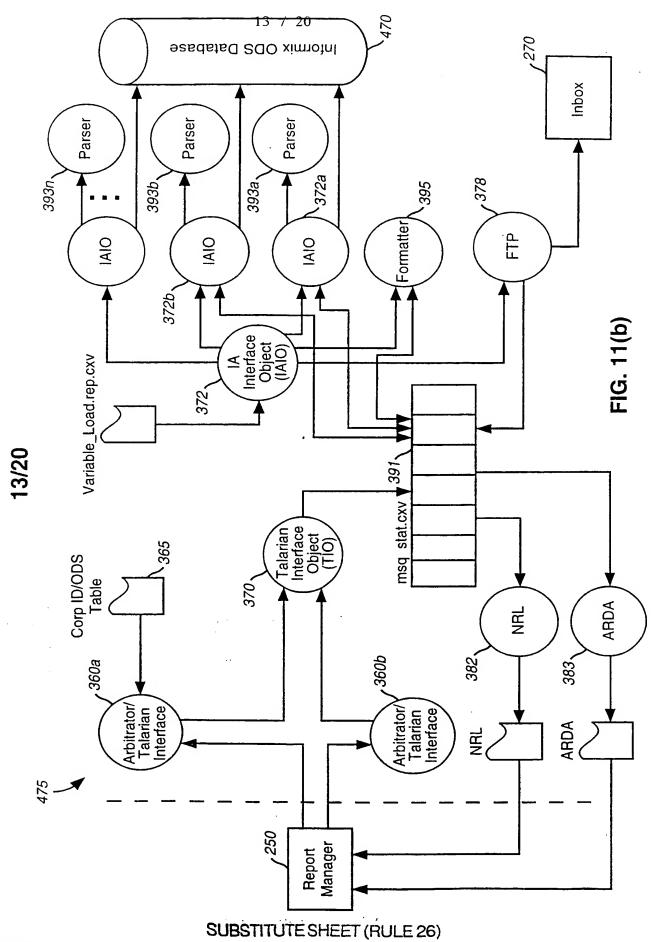

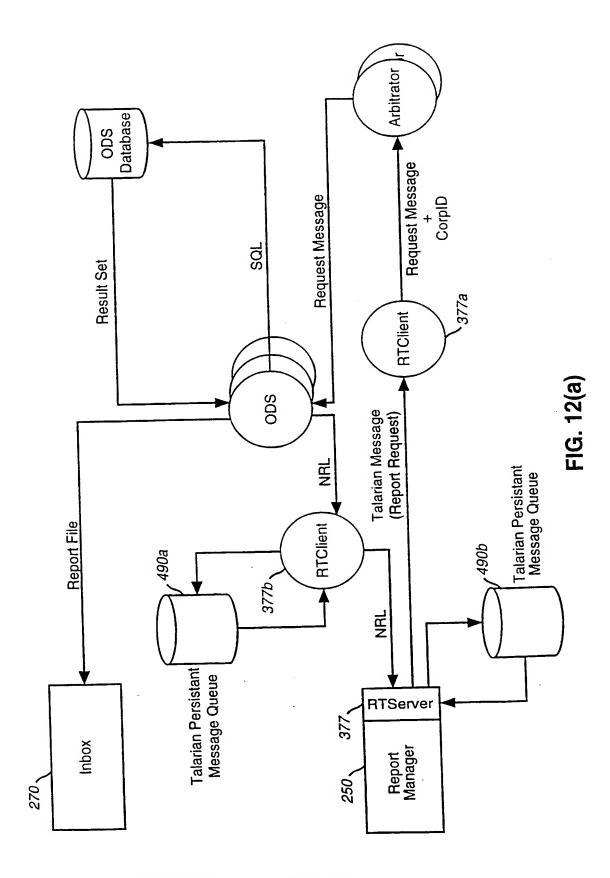

SUBSTITUTE SHEET (RULE 26)

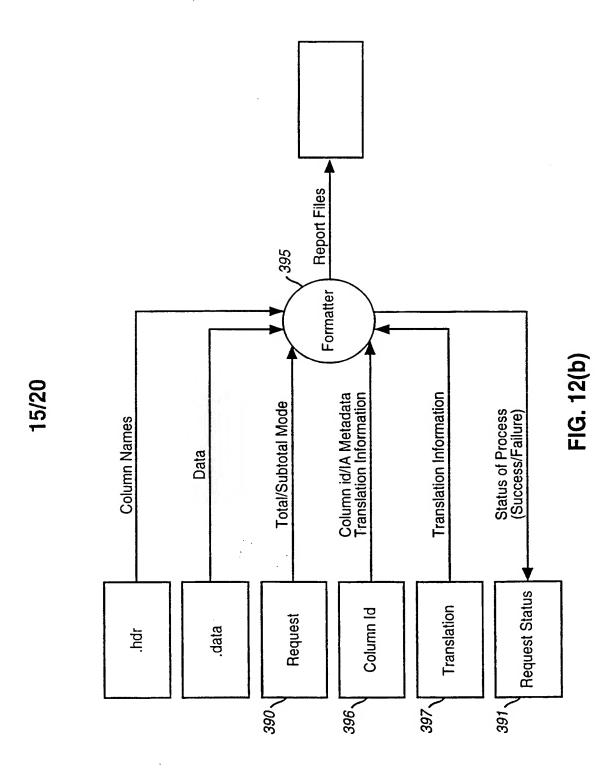

SUBSTITUTE SHEET (RULE 26)

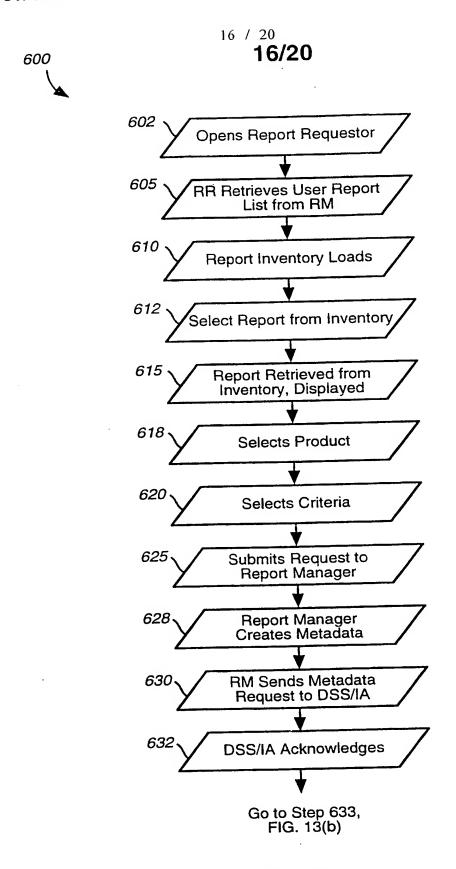


FIG. 13(a)

SUBSTITUTE SHEET (RULE 26)

PCT/US98/20148



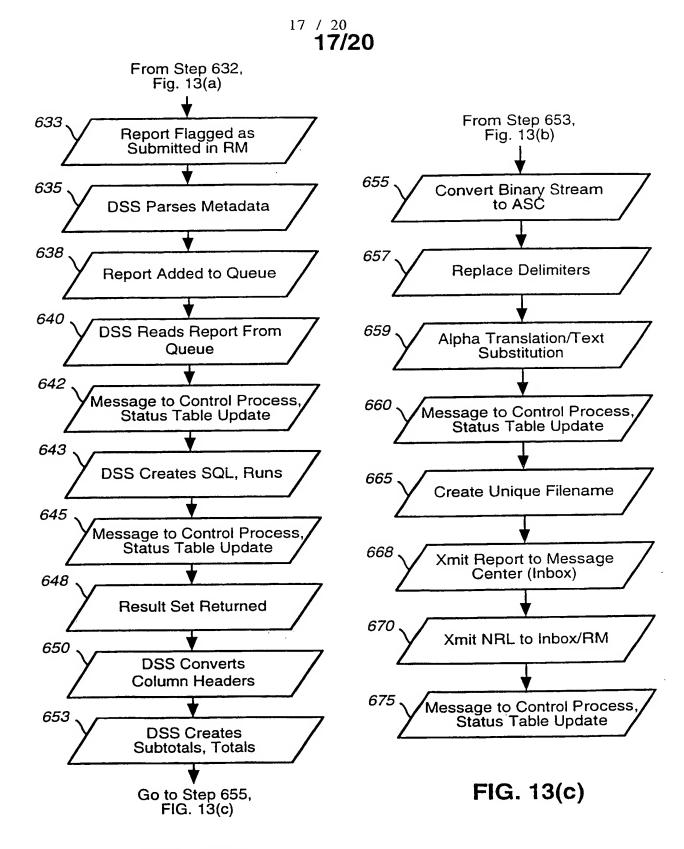


FIG. 13(b)

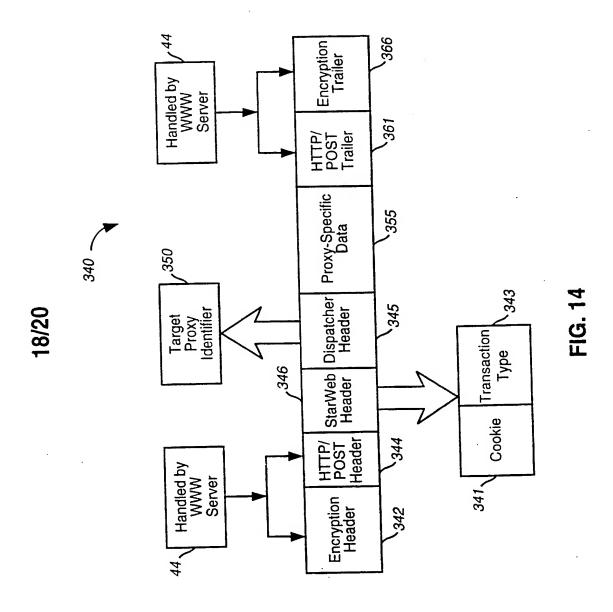


SUBSTITUTE SHEET (RULE 26)

WO 99/16207

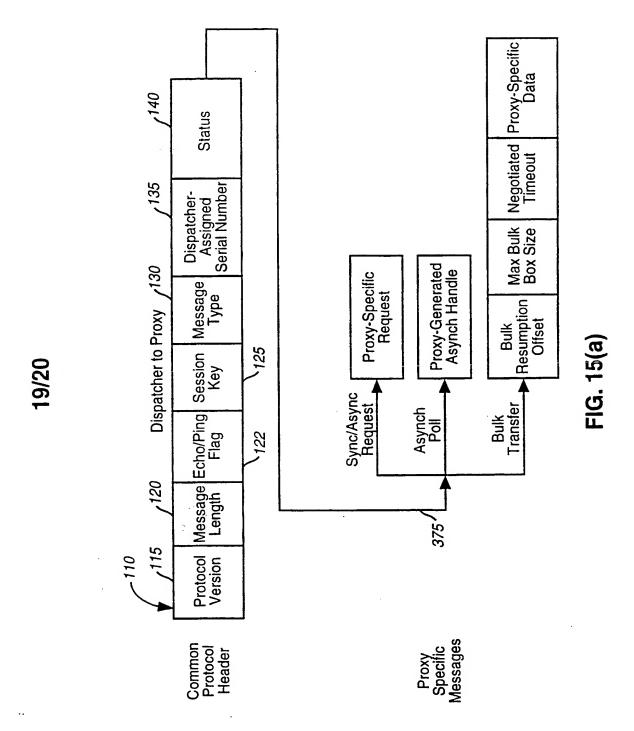

SUBSTITUTE SHEET (RULE 26)

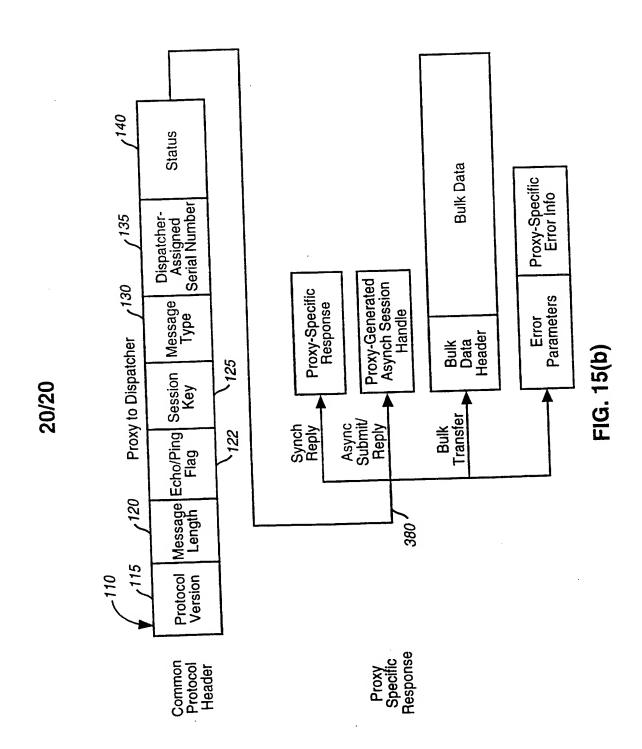

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International application No. PCT/US98/20148

	the state of the s							
A. CLASSIFICATION OF SUBJECT MATTER IPC(6) :H04L 9/00								
US CL :370/401; 395/186 According to International Patent Classification (IPC) or to both national classification and IPC								
B. FIELDS SEARCHED								
Minimum documentation searched (classification system followed by classification symbols)								
U.S. : 370/389, 400, 401, 410; 395/186, 187.01, 200.3, 200.47, 200.48, 200.49; 380/21, 24								
Documentation searched other than minimum documentation to	the extent that such documents are included in	the fields searched						
2002 Marie Control of the Control of								
Electronic data base consulted during the international search	(name of data base and, where practicable, s	earch terms used)						
APS search terms: Web, Internet, secure, firewall, encrypt								
C. DOCUMENTS CONSIDERED TO BE RELEVANT								
Category* Citation of document, with indication, where	appropriate, of the relevant passages	Relevant to claim No.						
A, P US 5,793,964 A (ROGERS et al) 1	1 August 1998	1-21						
A, P US 5,781,632 A (ODOM) 14 July	US 5,781,632 A (ODOM) 14 July 1998							
A, P US 5,721,908 A (LAGARDE et al)	US 5,721,908 A (LAGARDE et al) 24 February 1998							
}								
Further documents are listed in the continuation of Bo	x C. See patent family annex.							
Special categories of cited documents:	"T" later document published after the interned attement and not in conflict with the application."							
"A" document defining the general state of the art which is not consider to be of particular relevance	the principle or theory underlying the in							
E carlier document published on or after the international filing date	"X" document of particular relevance; the considered novel or cannot be considered							
"L" document which may throw doubts on priority claim(s) or which cited to establish the publication date of another citation or other	ner							
special reason (as specified)	"Y" document of particular relevance; the c considered to involve an inventive at	ep when the document is						
 O° document referring to an oral disclosure, use, exhibition or oth means 	ner combined with one or more other such de being obvious to a person skilled in the							
*P" document published prior to the international filing date but later the priority date claimed	an & document member of the same patent fa	*&* document member of the same patent family						
Date of the actual completion of the international search	Date of mailing of the international searc	h report						
24 DECEMBER 1998	24 FEB 1999							
Name and mailing address of the ISA/US	Authorized officer							
Commissioner of Patents and Trademarks Box PCT	KWANG B. YAO							
Washington, D.C. 20231 Facsimile No. (703) 305-3230	Telephone No. (703) 305-9509							

Form PCT/ISA/210 (second sheet)(July 1992)*

This Page Blank (uspto)